

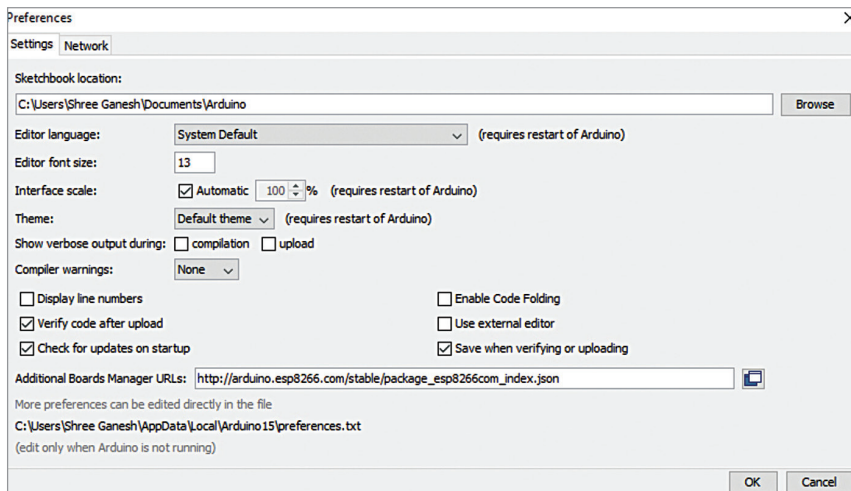


Fig. 8: Adding package_esp8266com_index.json in Arduino IDE

Expected Signals at Different Points		Table 1
Status	Remarks	
Wet soil = D0 of SS1 will be low	LED1 = On, RL1 deenergised, motor remains off	
Dry soil = D0 of SS1 will be high	LED1 = Off, RL1 energised, motor on	
J1=0V	LED2 = Off (for optional)	
J1=5V	LED2 = On (for optional)	
RF signal transmission	LED4 = On	
Power on in receiver section	LED3 = On	
Power off in receiver section	LED1 through LED4 = Off	
Relay RL1 energised	Adafruit platform logic 1, as shown in Fig. 6	
Relay RL1 de-energised	Adafruit platform logic 0, as shown in Fig. 7	

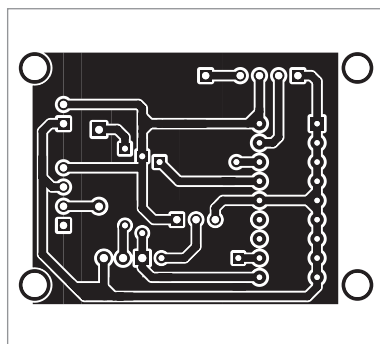


Fig. 9: Actual-size PCB layout for transmitter

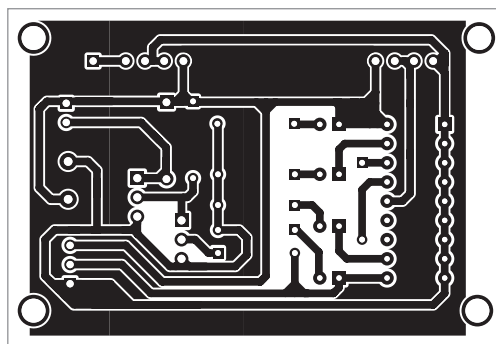


Fig. 11: Actual-size PCB layout for receiver

