



Say Goodbye to Level Shifters

And Hello to Multi-Voltage I/O on the AVR® DB MCU Family

Building an embedded design supporting multiple voltage standards often requires adding external hardware to ensure compatibility. The AVR DB family of MCUs features a dedicated port for simultaneous multi-voltage operation, allowing them to handle challenges on multiple power domains without needing external components. This port supports 1.8V–5.5V natively, allowing you to reduce cost and board space.

Say goodbye to level shifters, and build your next embedded design with AVR DB MCUs.

Key Features Include

- Internal 24 MHz oscillator
- Up to 128 KB of Flash and 16 KB of SRAM
- Intelligent Analog peripherals, including a 12-bit ADC, DAC and on-chip op amps
- Communications interfaces, including USART/SPI/dual-mode Two-Wire Interface (TWI)
- Available in a wide range of package options, from 28 to 64 pins



Contact Information

Microchip Technology India

Email: asia.inquiry@microchip.com

Phone:

• Bangalore (080) 3090-4444 • New Delhi (012) 0496-3497 • Pune (020) 4121-0141

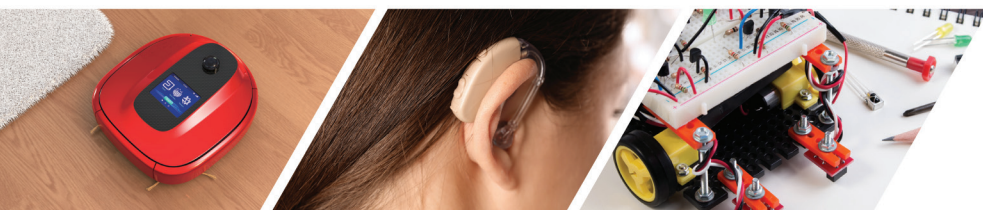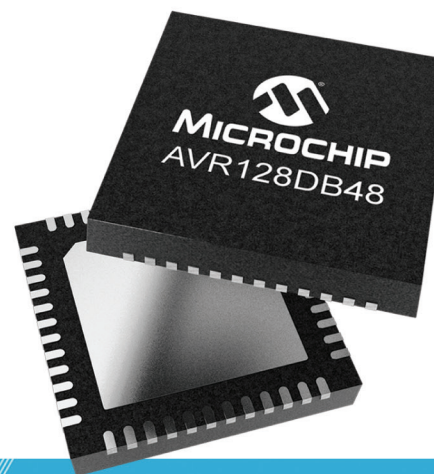

microchip.com/EFY-AVRDB



The Microchip name and logo, the Microchip logo and AVR are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. All other trademarks are the property of their registered owners.
© 2021 Microchip Technology Inc. All rights reserved.