

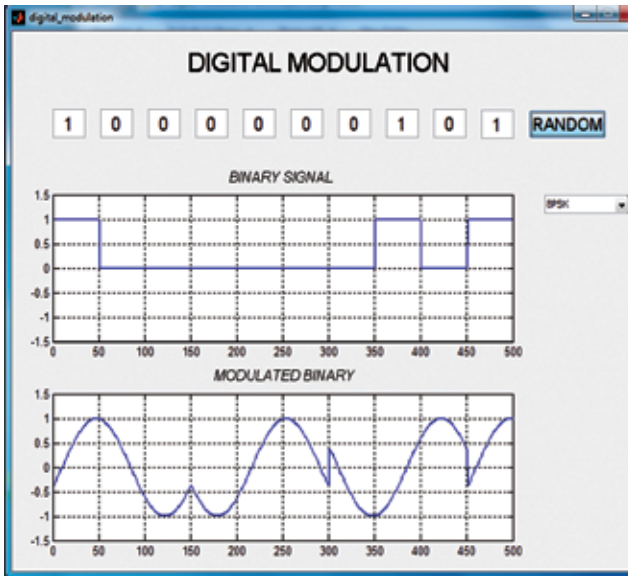


Fig. 3: 8PSK modulation

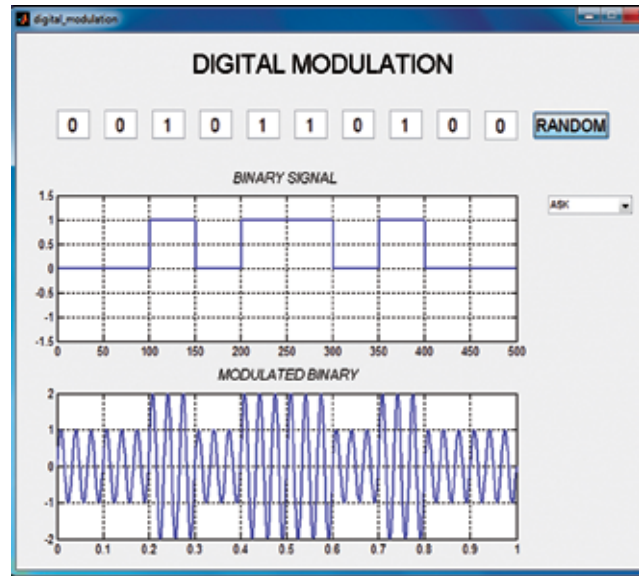


Fig. 4: ASK modulation

information bits out of 00, 01, 10, or 11 are modulated at a time, selecting one of four possible carrier phase shifts of 0, 90, 180, or 270 degrees. QPSK allows the signal to carry twice as much information as ordinary PSK using the same bandwidth. QPSK

is used for satellite transmission of MPEG2 video, cable modems, video-conferencing, cellular phone systems, and other forms of digital communication over an RF carrier.

QPSK phase is changed in accordance with binary bits 1 and 0. The

program output of QPSK modulated signal is shown in Fig. 2.

### 8PSK modulation


We can achieve bandwidth efficiency when we represent each signal element to map more than one bit. In

Stay Safe and Learn Electronics from the Comfort of Your Home

# Join online courses based on Arduino and Raspberry pi

Learn The Skills That Are  
Relevant in Market  
**+ Get Certified**

15+ Online Courses

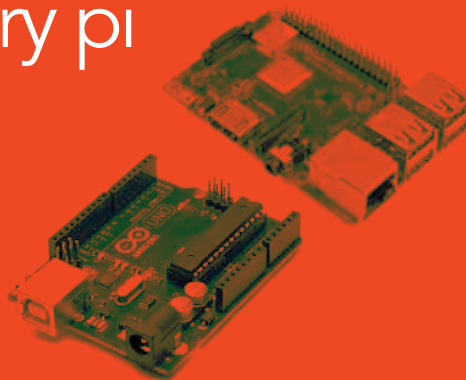

## Electronics Projects Volume

Digital Version @ ₹199

(Vol. 1 to 26)



**kitsNspares**  
.com

For the 'engineer' in you

**www.kitsNspares.com**

DIY PROJECT KITS | SELF-LEARNING KITS | DEVELOPMENT BOARDS | ELECTRONICS COMPONENTS

FOR ANY QUERY, CALL: +91-8800100761 | DEALER ENQUIRIES SOLICITED