

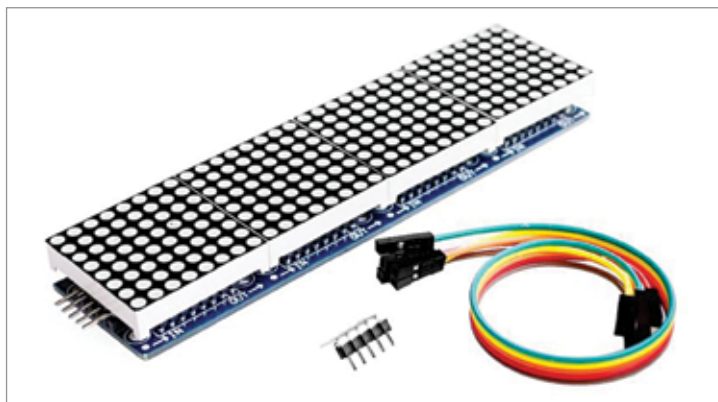


Fig. 3: Readymade 4-in-1 8x8 dot-matrix display board



Fig. 4: NEO 6M GPS module

PARTS LIST

Semiconductors:

- | | |
|----------------|----------------------------------|
| Board1, Board2 | - Arduino Nano |
| DIS1 | - 8x8 dot-matrix display module |
| GPS | - NEO 6M GPS module with antenna |
| | - 5V, 2A DC power supply |
| | - Jumper wires |

library for this project. After installing all the libraries, compile the source code (*efylabGPSclock.ino*) and upload

the code using correct serial COM port and Arduino board. The serial out is available in serial port at 9600 baud.

In the code, GPS time is set to UTC time by adding 05:30 IST for Indian time zone. (The time will show up with an interval which can be delayed or changed through the program code.)

Here, NEO 6M GPS module is connected to Arduino Board1. Again, TX1 pin of Board1 is connected to RX0 pin of Arduino Board2. The GPS module used during testing is shown in Fig. 4.

Finally, if everything is okay and the programs are uploaded to respective Arduino boards, switch on the power supply and wait for the GPS to connect to satellite. Once connection is established, the dot-matrix display will show the current date and time. **EFY**




Kamal Das is a track maintainer in Eastern Railways and is also an electronics hobbyist

Stay Safe and Learn Electronics from the Comfort of Your Home

Join online courses based on Arduino and Raspberry pi

Learn The Skills That Are
Relevant in Market
+ Get Certified


15+ Online Courses

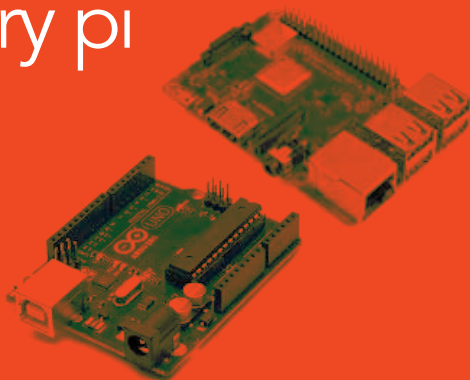

Electronics Projects Volume

Digital Version @ ₹199

(Vol. 1 to 26)



kitsNspares.com
For the 'engineer' in you

www.kitsNspares.com

DIY PROJECT KITS | SELF-LEARNING KITS | DEVELOPMENT BOARDS | ELECTRONICS COMPONENTS

FOR ANY QUERY, CALL: +91-8800100761 | DEALER ENQUIRIES SOLICITED