

But some effects can only be achieved by professional cameras having expensive lenses. Now an intelligent emitter module for 3D sensing allows smart-



phones to take high-quality images and videos with staggered depth of field. The module features a 3-watt infrared VCSEL with a wavelength of 940 nanometers, allowing acquisition of depth information by ToF technology at a distance of up to seven metres for 3D object recognition or augmented reality apps.

OSRAM
www.osram.com

Ka-band DACs for quicker evaluation

The EV12DD700 dual-channel DACs can perform operations up into Ka-band frequencies for mission-critical microwave systems and have a 25GHz output bandwidth with only 3dB attenuation. Built into each DAC is an array of sophisticated signal process-




ing functionality, which comprises a programmable anti-sinc filter and direct digital synthesis (DDS) capability, as well as a programmable complex mixer. Also included is a digital up-converter (with four interpolation stages, plus sinc compensation). Engineers can now investigate the key operational parameters much sooner for a particular design criteria.

Teledyne e2v
www.teledyne-e2v.com

Motor control ICs for ventilators and temperature control

To efficiently control pressure, temperature, liquid level, magnetic bearings, chemical reaction rate, and other 'outer loop' quantities for medical, industrial, and

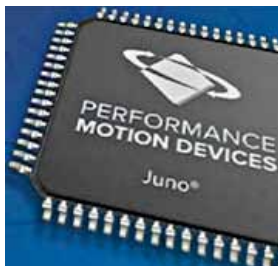

military applications, the Juno MC71113, MC73113, and MC78113 ICs integrate a high-speed outer loop control function with a velocity control function for 3-phase brushless DC and DC brush motors. Application examples include ventilators and process temperature control.

Performance Motion Devices
www.pmdcorp.com

Sharp ultrasound imaging for pediatrics

With the introduction of the ultrasound solution for pediatric assessment, clinicians can now obtain highly detailed images and accordingly make a suitable diagnosis to pediatric patients, reducing



the need for additional diagnostic imaging steps, such as X-ray imaging. As pediatric patients are more radiosensitive than adults, the solution minimises risk by reducing unnecessary radiation exposure during medical imaging. The ultrasound solution combines dedicated transducers, enhanced processing, and software tools, helping clinicians diagnose pediatric patients more quickly.

Philips
www.philips.com

PoE cables paired with transmitter and receiver

Allowing uninterrupted network connectivity up to 610 metres over a single standard, twisted 4-pair copper cable is the robust power-over-Ethernet (PoE) extender series. Paired with a transmitter




and a receiver, the PoE solution delivers uninterrupted data by reaching up to 610 metres (2,000 feet) and is suitable for office buildings, hospitals, schools, and parking lots and IP devices such as security cameras.

Panduit
www.panduit.com

3D image sensor for mini camera modules

Allowing integration into miniaturised camera modules and accurately measuring depth in short and long range for augmented reality, while meeting low power consumption requirements, this 3D depth sensor based on the time of flight (ToF) offers a wide spectrum

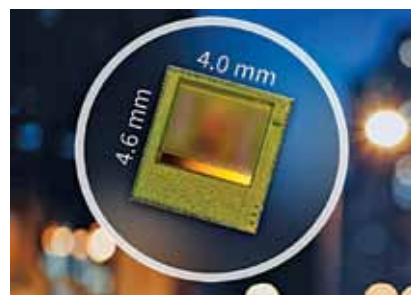

of innovative consumer usability. The REAL3 ToF sensor enables differentiated camera performance in different ranges, light conditions, and use cases while saving battery's life for various applications like real-time augmented reality, long-range scanning, small object reconstruction, fast low-power autofocus, and picture segmentation, without losing resolution in the shorter range.

Infineon Technologies
www.infineon.com