

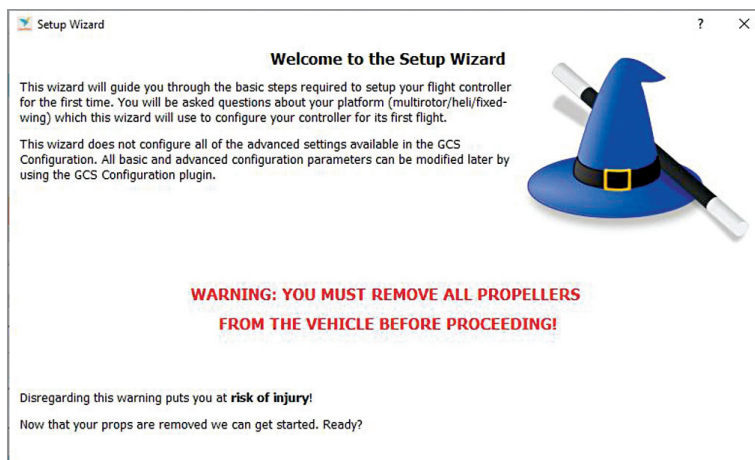


Fig. 7: Welcome window

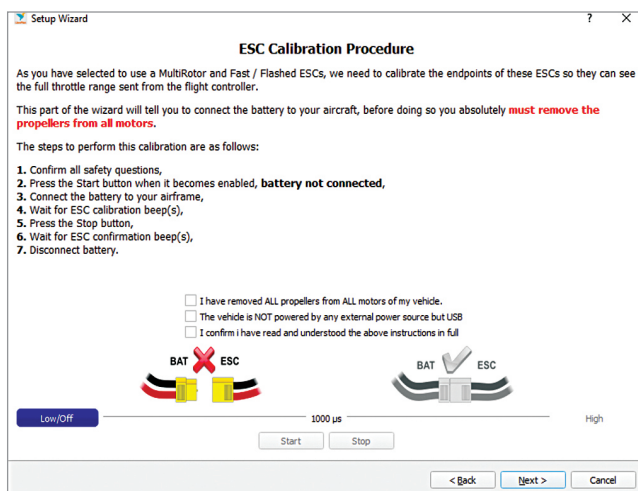


Fig. 8: ESC calibration procedure window

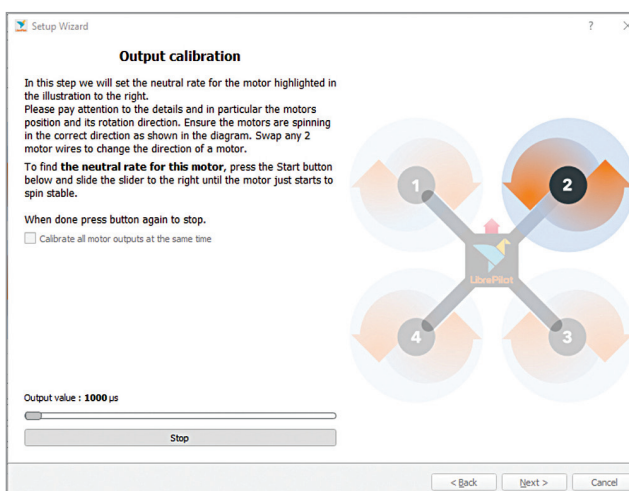


Fig. 9: Output calibration window

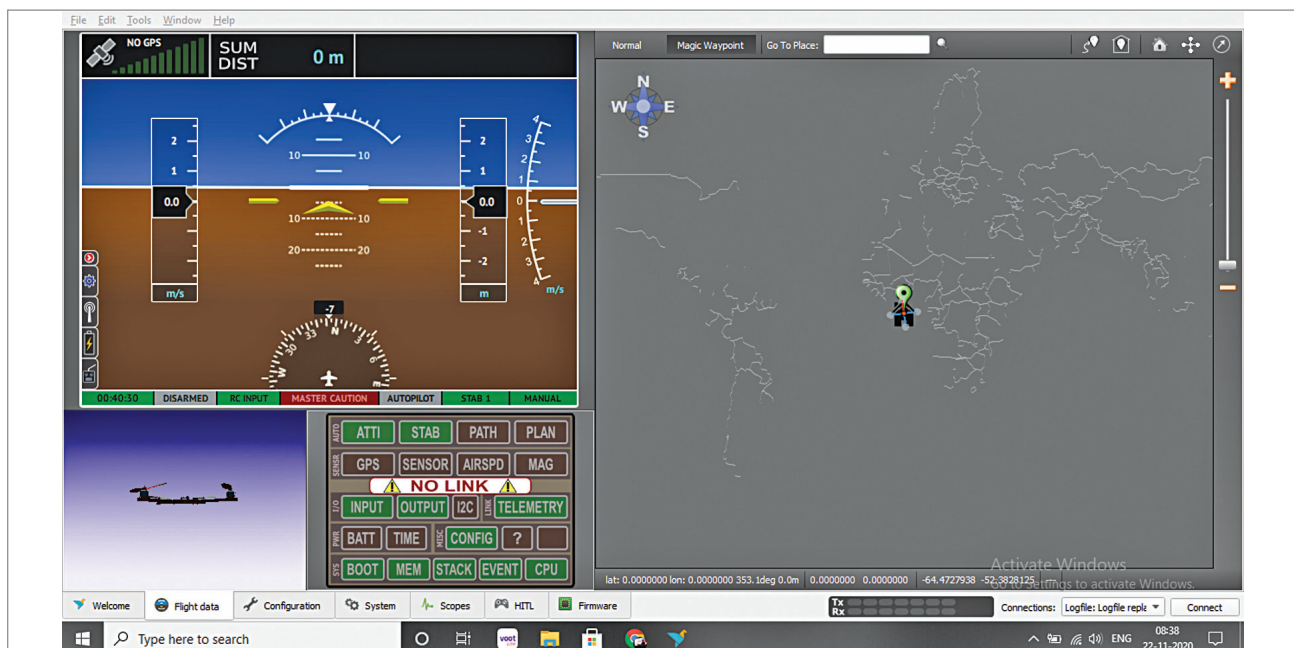


Fig. 10: Flight data window

Move the remote sticks as shown in the GUI and then put all the sticks to the centre. Next, move all the sticks to the max positions in both directions and save the settings. After that, define the process for arming the flight controller. To do so, go to the arming settings and select the options for arming.

Next, add the FPV camera to drone. The FPV camera has three wires: yellow, red, and black. Flight data window shows the movement of the drone (refer Fig. 10).

Connect the red and black wires to power supply according to the requirement of your camera. Raspberry Pi camera module was used in the prototype as it was already available, as shown in Fig. 11.