


inertial measurement unit (IMU), GNSS correction data, odometry information, and a vehicle dynamics model to pro-




vide high-quality positioning accuracy. The precision module integrates GNSS correction data service and broadcasts in the highly scalable state-space representation (SSR) format, making it easier to deliver fast time-to-market precise positioning solutions.

u-blox
www.u-blox.com

100V RF/GaN SiC product

The IGN1011S3600 is a 100V RF GaN/SiC product targeting a wide range of applications including radar, avionics, electronic warfare, industrial, scien-




tific, and medical systems. Operating at 100V, it achieves 3.6kW output power with 19dB gain and 70% efficiency. The IGN1011S3600 gives designers the ability to dramatically increase system power levels and functionality while simplifying system architectures with less power combining circuitry. Customers ultimately benefit with a smaller system footprint and lower system cost.

Integra Technologies
www.integrattech.com

Buck regulator IC

Operating at a switching speed of 667kHz, the SZDL3105B fully-integrated DC-DC converter (buck regulator) can supply up to 5 amps and 100 watts of output power. It accommodates industry-leading wide input and output ranges

that support up to 27V DC input and is supplied in a tiny 4mm x 4mm QFN package. It has low operating power

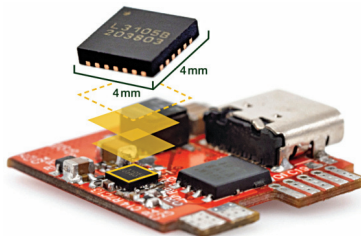

dissipation, and internal and external feedback resistor divider. Applications include fast charging power adaptors and battery chargers for mobile devices. *Silanna Semiconductor*
www.silanna.com

Small LoRaWAN modem module

The Type 1SJ LoRaWAN modem module comes preloaded with AT Command controlled modem firmware and a LoRaWAN stack with an AT Command middle layer. Operating from a single supply rail up to 3.9V DC, the device incorporates several low-power modes that allow the real time clock to operate while drawing a typical current




of just 1.3µA, assuring battery longevity. These features enable a faster time-to-market and ease design challenges for IoT developers. It is suitable for a wide range of applications such as asset tracking, utilities, agriculture, smart cities, smart buildings, industrial, and other IoT applications where a miniaturised footprint, long range, extended battery life, advanced security, and a competitive price point are all critical requirements.

Murata Manufacturing
www.murata.com

Module combining two radio standards

The PTM 535BZ is a transmitter module for battery-free switch applications. It

offers a combination of supported wireless standards in the 2.4GHz radio band and enables the realisation of energy harvesting wireless switches communicating based on Bluetooth Low Energy



or Zigbee Green Power radio standards. Thanks to the integrated Near Field Communication interface, it is easy to switch between the two radio standards. This gives users the option of selecting one of these two protocols for transmission depending on applications such as public transport, mechanical door and window sensors, or even mini switches for household appliances.

EnOcean
www.enocean.com

3-in-1 industrial sensor for vibration, temperature, and speed

The VSx is an industrial wired sensor that combines vibration, temperature, and speed detection. It plugs into the Petasense transmitter to detect common failures in variable speed, batch or



spared assets. Integrated speed detection within the VSx allows users to take measurements only during the specified speed ranges or when the asset is operating. Embedded smart sensing allows the sensors to communicate with each other, providing synchronised readings and enabling users to better diagnose developing problems. By wiring the VSx into the Petasense transmitter, users can take advantage of affordable batteryless wireless monitoring and accelerate IIoT deployments.

Petasense
www.petasense.com