

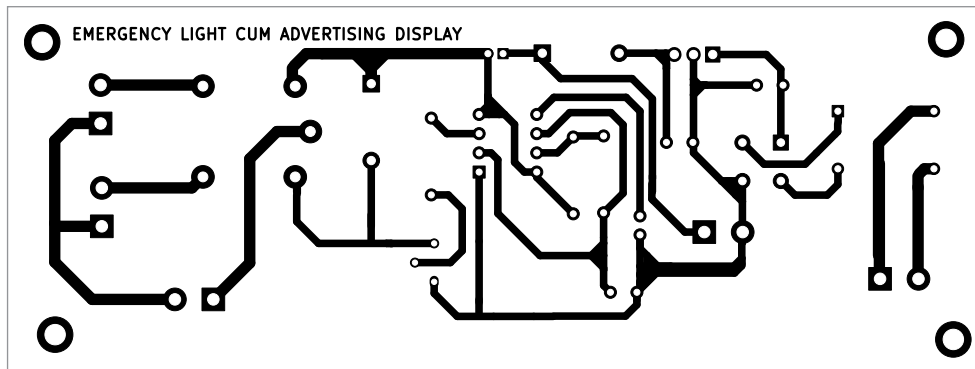


Fig. 3: Actual-size PCB layout of the circuit

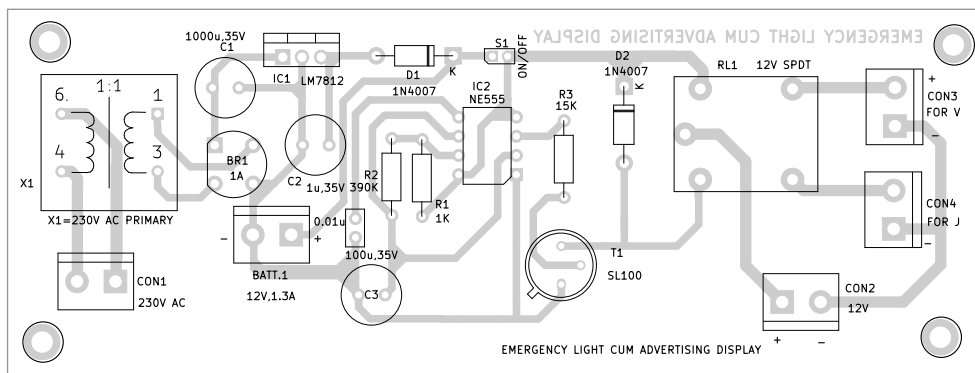


Fig. 4: Component layout for the PCB

shown in Fig. 4.

After assembling the circuit on PCB, enclose it in a suitable box. The box used by the author is a PVC electrical board available in the market at a low cost. Fix the alphabets 'V' and 'J,' made with LED strips, across CON3 and CON4, respectively, on the front of the box. Connect switch S1 on front side of the cabinet to switch on/off the display. Instead of 'V' and 'J,' you can use any other alphabets or short words for advertisements. The prototype shown in Fig. 5 demonstrates the alternating display of 'V' and 'J.'

Once the circuit is assembled, install the unit at a suitable place at the gate of an office/residence. If you wish to use

it as an emergency light only, omit the letters/words and arrange the strips in straight lines or any other pattern of your choice, solely for lighting. Now, the circuit is ready to use. **EFY**




Fig. 5: Alternating display of letters 'V' and 'J'

bet that was previously illuminated automatically turns off. This alternating on and off operation not only extends the life of the LED strips but also saves electrical power.

Construction and testing

An actual-size, single-side PCB layout for the circuit is shown in Fig. 3 and its component layout is

Dr Milind M. Sutar (left) is Assistant Professor of Physics at S.M. Dr Bapuji Salunkhe College, Miraj, Sangli, Maharashtra. Riddhika M. Sutar (right) is pursuing B.Tech from Rajarambapu Institute of Technology, Islampur, Sangli, Maharashtra



THE COMPLETE MAGAZINE ON OPEN SOURCE

OpenSource
ForYou

The latest from the Open Source world is here.

OpenSourceForU.com

Join the community at facebook.com/opensourceforu

Follow us on Twitter @OpenSourceForU