

digital multimeter. The True RMS metre is an electronic measurement instrument for laboratory, workshop,




or benchtop environments. It measures diverse electrical parameters within electronic circuits

and components. The multimeter has measurement functions such as AC/DC voltage and current, μ A current, resistance, temperature, capacitance, frequency, inductance, and duty cycle. It is suitable for professionals in various industries. The multimeter is used by engineers, technicians, and individuals working with electrical and electronic systems. It helps in ensuring functionality, diagnosing issues, and verifying performance of electronic devices and circuits.

Triplett Test Equipment & Tools
<https://www.triplett.com/en-in>

T3 E3 analyser for network monitoring and protocol analysis

GL Communications has introduced the T3 E3 Analyser, designed for T3 and E3 network monitoring and traffic generation. The platform provides complete control over T1 and E1

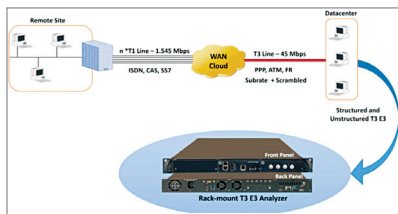

lines for analysing and replicating telecom protocols on T3 E3 networks, managing signalling, voice, and data. It supports comprehensive protocol analysis, including HDLC and ISDN, with high-speed data transmission capabilities for T3 and E3 lines. The system features channelised access to all channels within T3 or E3 lines, enabling detailed emulation, analysis, and monitoring. Its hardware and software can transmit and monitor multiple T1 E1 frames over T3 E3

lines, analysing various signal types. The platform supports both unchannelised (unstructured) and channelised (structured) testing modes, offering flexibility in protocol analysis and structured testing with drop and insert capabilities. It provides extensive monitoring and analysis capabilities for framed and unframed T1 E1 signals, including bit error rate test (BERT) capability and protocol analysis for structured protocols.

GL Communications
<https://www.gl.com>

Enhanced testing capabilities for the emerging Wi-Fi 7 standard

Anritsu Corporation has expanded the capabilities of its Wireless Connectivity Test Set MT8862A by introducing a new feature that is compatible with the emerging Wi-Fi 7



standard. The MT8862A includes a feature for assessing Wi-Fi 7 signal quality using Network Mode. This technology enables RF evaluation for all data rates within WLAN standards, including Wi-Fi 7. The test set allows for the assessment of RF TRX characteristics like transmit power, modulation accuracy, and receive sensitivity in WLAN devices. Network Mode, a test mode that simulates device operation, evaluates RF characteristics using data link layer communication protocols for connectivity between chips and testers, useful for over-the-air (OTA) performance testing and antenna assessment in products. The MT8862A also considers the previous WLAN standard, IEEE 802.11ax, which supports speeds up to 9.61Gbps, and includes multi-link operation (MLO) technology, enabling simultaneous data transmission and reception across multiple frequency bands and channels, a feature of Wi-Fi 7.

Anritsu Corporation
<https://www.anritsu.com/en-in>

MANUFACTURING EQUIPMENT

Screen printing advancements for higher efficiency

Europlacer has launched the ii-P7, which incorporates a range of enhancements to increase productivity. This includes a maintenance-free printhead equipped with active closed-loop squeegee pressure control, eliminating the need for squeegee calibration.



This platform is tailored for handling stencil sizes from 58.4cm to 73.6cm (23 to 29 inches) directly, eliminat-

ing the need for adapters and thus streamlining setup and turnover times in varied assembly environments. The ii-P7 also features an improved inner screen cleaning mechanism with enhanced paper management and fluid dispensation, supported by an external solvent tank for easier fluid handling. An optional cleaning system offers a wet-dry-vacuum cycle in one pass, reducing cleaning time by a third. The quick-change cassette system for paper rolls minimises downtime. The ii-P7 supports factory-wide connectivity, being fully equipped with IPC-CFX and Hermes-compliant protocols, remote monitoring, and predictive consumable replenishment as standard features.

Europlacer
<https://europlacer.com>

RFID die bonder enhances industry standards

ITEC's ADAT3 XF Tagliner is an RFID inlay die bonder with high speed and accuracy. Achieving placement speeds of up to 48,000 units per hour (UPH) with positional and rotational accuracies of less than 9 micrometres and 0.67° at one sigma, this tagliner outperforms other die-bonding equipment in both speed and

