



Gigabit Ethernet PHY for Time-Sensitive Networks

Delivers IEEE® 1588 Time Stamping for Critical Processes

Developers of industrial automation systems have traditionally relied upon proprietary solutions for process synchronization. Today, many of those developers are shifting to standard-based solutions that offer broader compatibility and reduced design costs.

Our LAN8840 and LAN8841 Gigabit Ethernet (GbE) transceiver devices—designed to deliver a critical process timing synchronization network for industrial applications—offer competitive advantages in price and performance. In addition to meeting IEEE® 1588v2 standards for Precision Timing Protocol (PTP), these devices feature Linux® drivers and flexible Ethernet speed options including 10BASE-T, 10BASE-Te, 100BASE-TX and 1000BASE-T.

Key Features


- EtherSynch™ technology IEEE 1588v2/PTP
- Energy-detect power-down mode for reduced power consumption when cable is not attached
- Energy Efficient Ethernet (EEE) support with Low-Power Idle (LPI) mode and clock stoppage for 100BASE-TX/1000BASE-T and transmit amplitude reduction with 10BASE-Te option
- Wake-On-LAN (WOL) support with robust custom packet detection
- Five programmable LED outputs for link, activity and speed

Contact Information

Microchip Technology India

Email: asia.inquiry@microchip.com

Phone: • Bangalore (080) 3090-4444 • New Delhi (012) 0496-3497 • Pune (020) 4121-0141

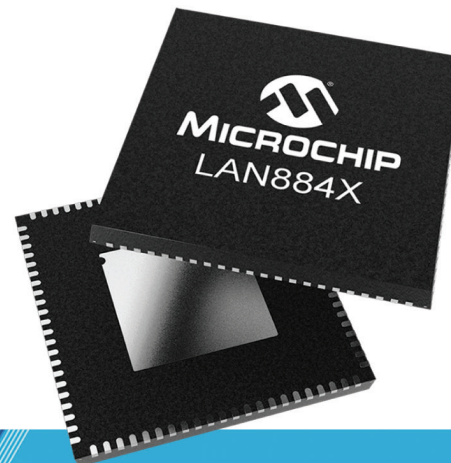

microchip.com/EFY-LAN884x



The Microchip name and logo and the Microchip logo are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries. All other trademarks are the property of their registered owners.
© 2023 Microchip Technology Inc. and its subsidiaries.
All rights reserved.