


ELECTRONICS B2B INDUSTRY

IS NOW AT A CLICK OF A BUTTON!


electronicsB2B.com
All About Electronics Industry

Log on to www.electronicseb2b.com
and be in touch with the
Electronics B2B fraternity 24x7

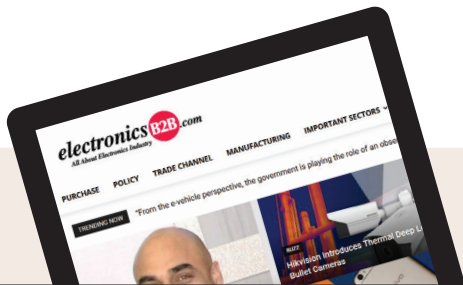

DISPLAY INDUSTRIAL SOLUTIONS VISIONS

- Excellent contrast 2000:1
- For environments -40...+80°C
- Extremely wide viewing angle 170°
- SPI, I²C Bus Interface
- Integrated character set
- Super fast, even at -40°C
- Text and graphic
- Super flat and sturdy
- With pins for easy mounting
- USB testboard
- Optional touch panel
- Ex stock available

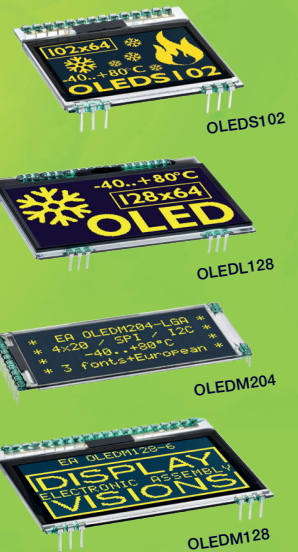

OLED DISPLAYS

www.lcd-module.com

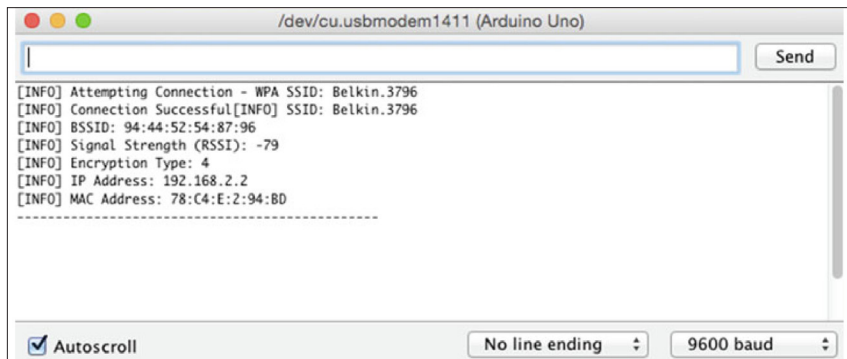


Fig. 6: Successful connection to the internet via Wi-Fi

```
// Print MAC address
byte mac[6];
WiFi.macAddress(mac);

Serial.print("[INFO] MAC Address: ");

Serial.print(mac[5], HEX);
Serial.print(":");

Serial.print(mac[4], HEX);
Serial.print(":");
```

```
Serial.print(mac[3], HEX);
Serial.print(":");

Serial.print(mac[2], HEX);
Serial.print(":");

Serial.print(mac[1], HEX);
Serial.print(":");

Serial.println(mac[0], HEX);
```

Finally, let us write down the standard functions, i.e., `setup()` and `loop()`:

```
void setup()
{
    Serial.begin(9600);

    // Connect to the internet
    connectToInternet();
}

void loop()
{
    // Nothing to do here
}
```

Hurray! We are done with the Arduino code for connecting to the internet via Wi-Fi. In case there are no errors, the output on your serial monitor window should look like the output in Fig. 6. **EFY**

This article was first published in December 2022 issue of Open Source For You magazine.