



DO-IT-YOURSELF: PROJECT



Don't Be A Loser!

You don't know how much you don't know.

Read

electronics
FOR YOU

to keep up-to-date
with the tech world



To subscribe,
visit efy.in or
contact us at: 011-4059660
Email: support@efy.in

OR

Scan
This
Code



Also available at all leading magazine outlets

RTC DS3231 is a real-time clock module with battery backup. The battery to be used is CR2032 button cell, which can maintain the time for at least one year. The RTC uses two-wire I2C interface. This means that for communicating with Uno, the RTC requires only two pins, SDA and SCL. Fig. 3 shows the RTC DS3231.

As mentioned earlier, the circuit is divided into two parts. In the first part, we see how to interface the LCD to Arduino Uno (see Fig. 4). In the second part, we add a clock chip to this setup and display the time (see Fig. 5).

The LCD and RTC are connected to the Arduino as shown in Fig.

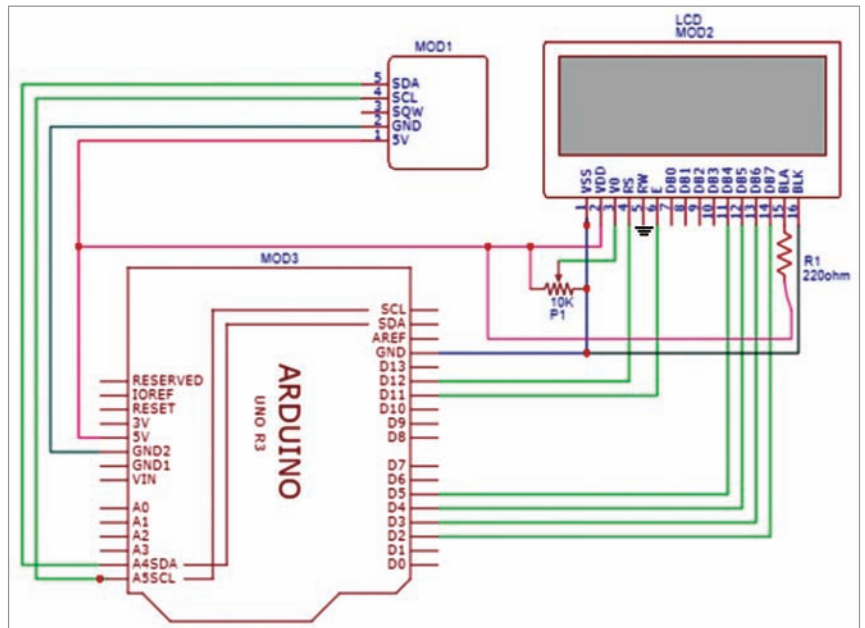


Fig. 4: Connection of RTC and LCD with Uno for SPI

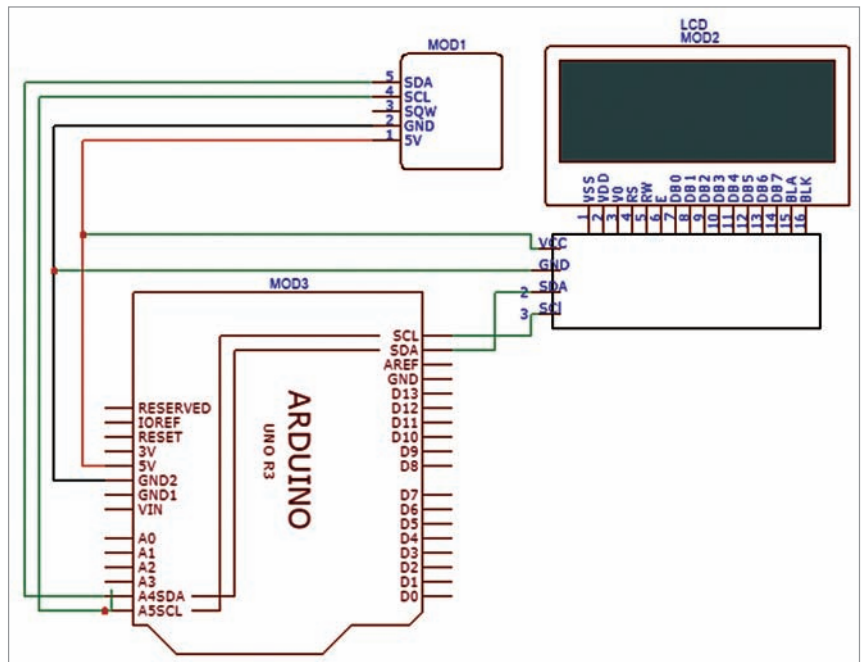


Fig. 5: Connection for SPI to I2C converter display