

```

sketch_mar16c $
include "Arduino.h"
include "sleepbreathingradar.h"
include <HardwareSerial.h>

HardwareSerial Serialss(2); // use UART2
define Serial1 Serialss

#ifdef __AVR__
#include <HardwareSerial.h>
HardwareSerial Serialss(2); // use UART2
#define Serial1 Serialss
#endif

void SleepBreathingRadar::SerialInit() {
Serial1.begin(9600, SERIAL_8N1, 16, 17);

// Receive data and process
void SleepBreathingRadar::recvRadarBytes() {
static boolean recvInProgress = false;
static byte ndx = 0;
byte startMarker = MESSAGE_HEAD; //Header frame
byte rb; // Each frame received
while (Serial1.available() > 0 && newData == false) {
rb = Serial1.read();
if (recvInProgress == true) { //Received header frame
if (dataLen > ndx) { //Length in range
Msg[ndx] = rb;
if (ndx == 0) dataLen = Msg[0]; //Get length frame
ndx++;
}
else { //Ending the information acquisition

```

Fig. 3: Modifying .cccp file of the library to access serial port 1 on ESP chip

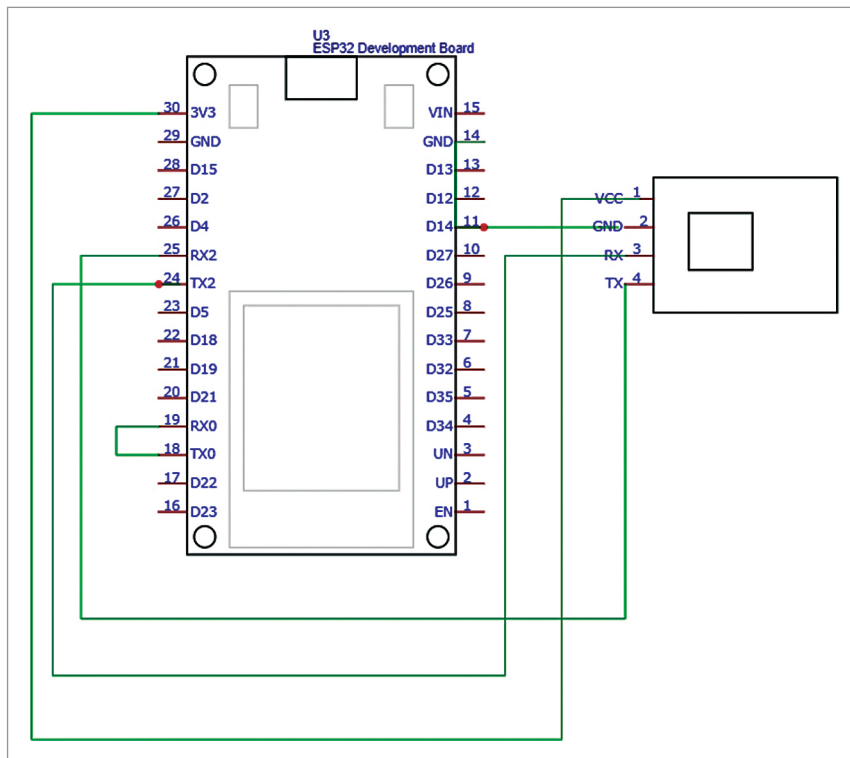


Fig. 4: Circuit diagram

Once
you stop
learning,
you start
dying.

—Albert Einstein

Amaze
Yourself!

Read Electronics For You

You'll realise how much you
didn't know, and didn't
know that you didn't know!

To Subscribe:
<http://subscribe.efy.in>

Scan This Code

