

```
(const homekit_value_t value) {
bool on = value.bool_value;
  cha_switch_on.value.bool_
value = on; //sync the value
LOG_D("Switch: %s", on ? "ON" :
"OFF");
```

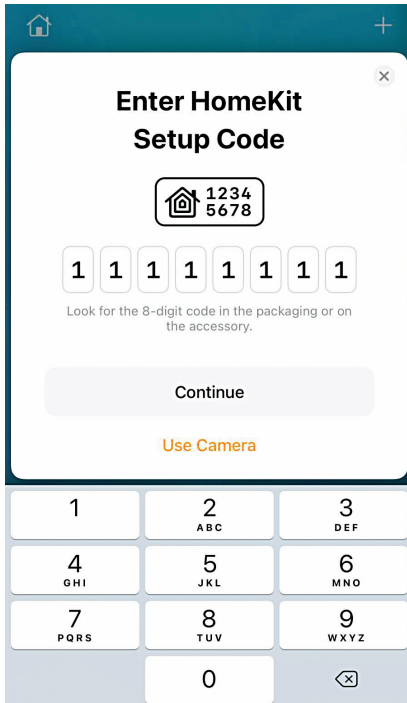


Fig. 21: Adding setup code

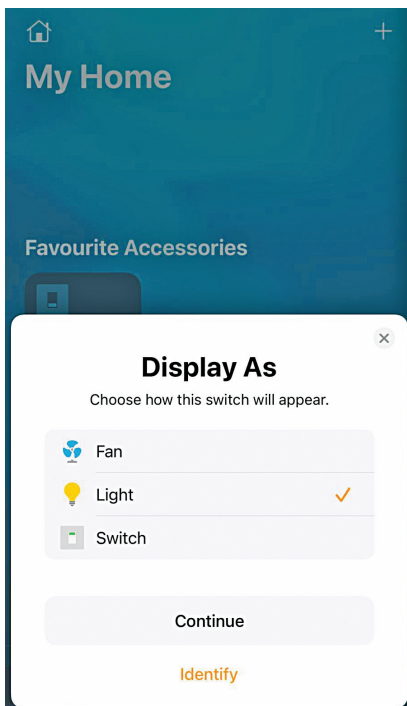


Fig. 22: Display As window

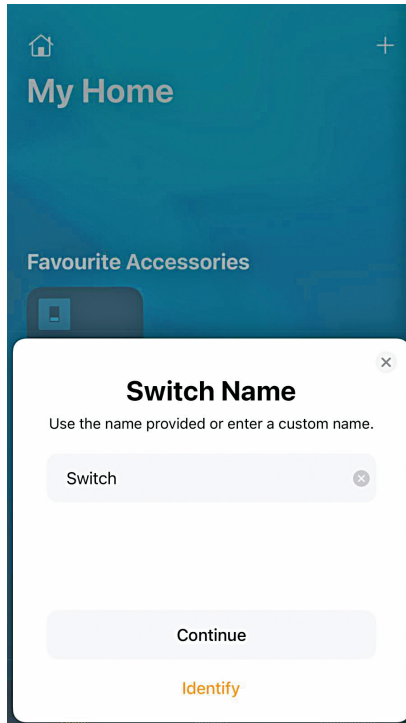


Fig. 23: Switch name

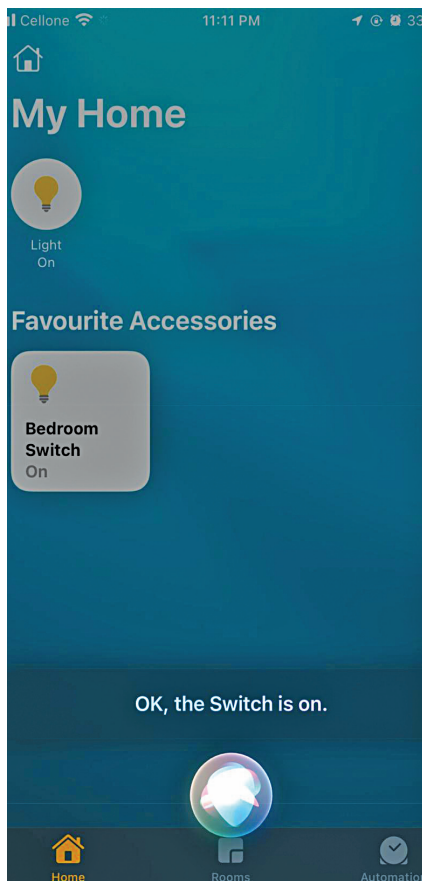


Fig. 24: Responses from iPhone app

```
digitalWrite(PIN_SWITCH, on ?
LOW : HIGH); }
```

Copy these lines and add as many times as you have added new devices. Then change the setter, PIN_SWITCH and cha_switch_on in the code, as shown in Fig. 17. This is basically the .setter function to get the switch-event sent from Apple's iOS device.

Now, upload the code to NodeMCU board. Next, set up the Apple HomeKit app.

Setting up Apple HomeKit

Follow the steps given below to set up the Apple HomeKit app using Apple's iPhone SE device.

Step 1. Download the HomeKit from App Store.

Step 2. On the top right corner, click on the plus (+) button. Select Add Accessory. You will see a pop-up window, as shown in Fig. 18.

