


New High Voltage PXI & LXI Signal Switching for Electronic Test

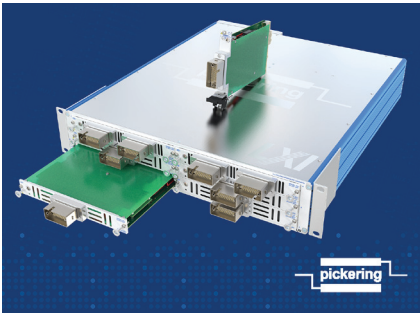

Operating up to 9kV, Pickering Interfaces' new range of PXI and LXI high voltage switching significantly increases the capabilities of our product line. These new products offer a variety of topologies such as multiplexers and the smaller building blocks of uncommitted SPST switches.

All models are based on the industry-leading quality reed relays from our relay division, Pickering Electronics, and include RFI suppression

components to extend relay contact life and control surges caused by high voltage transients.

The 4x-323 range introduces industry-leading 9 kV SPST switching capability into the PXI platform, allowing modular and scalable test systems to be constructed with minimal rack space (available in both PXI and PXIe).

Many configurations are offered in the LXI range, including 19 multiplexer options (model 65-231) and five SPST options (model 65-233) allowing a switching solution to be tailored closely to test system requirements. The 65-231 range offers multiple common connections for easy interconnection between plugin modules when expanding the test system.

The products are provided with a

hardware interlock feature that can prevent switch operation until the interlock signal is present or return all functional switches to the open position when the signal is removed. The interlock signal can also be connected between modules allowing independent or ganged operation. Uses include but are not limited to disabling relay operation if the test system cabinet door is open.

Please visit booth B2 at the India Electronics Week Expo, 23-25 November 2022. Pickering's official Indian representative Vigven will be on hand to answer any questions.

Please Contact Us:
Email: sales@vigven.com
Call: +91-80-2333-9220
Visit: pickeringtest.com



ADXL367- Nano power, 3-Axis, ± 2 g/ ± 4 g/ ± 8 g Digital Output MEMS Accelerometer

FEATURES:

- Single-cell battery operation: 1.1V to 3.6V
- Internal power supply regulation for high PSRR
- Ultralow power
- 0.88 μ A at 100 Hz ODR, 2.0 V supply
- 180nA motion activated wake-up mode
- 40nA standby current
- High resolution: 0.25 mg/LSB
- Low noise to 170 μ g/ $\sqrt{\text{Hz}}$
- On-chip temperature sensor
- SPI (4-wire) and I2C digital interfaces
- Thin 2.2 mm $\times$ 2.3 mm $\times$ 0.87 mm package

APPLICATIONS:

- Hearing aids
- Vital signs monitoring devices
- Motion-enabled power save switches & Metering devices
- Smart watch with single-cell operation



MACNICA
CYTECH

 **ANALOG
DEVICES**

Interested? Call: +91 9731822008 • Email: deepakmr@macnica.com, imrans@macnica.com