

EFY GROUP
YOURS SINCE 1969

**Facing
problems in
getting
EFY Magazine
in your area?
If so, let us know!**



Electronics For You magazine is available at all top news-stands/outlets in India. But if you are facing problem in getting EFY magazine in your area, please call Akhilesh Yadav on **+91-8800295612** or drop an email at efycirc@efy.in. We will help you locate the nearest news-stand or arrange a copy at your doorstep.

**electronics
FOR YOU**

South Asia's Most Popular Electronics Magazine

Those who wish to distribute EFY Group publications may also call Akhilesh Yadav on +91-8800295612 or write at efycirc@efy.in

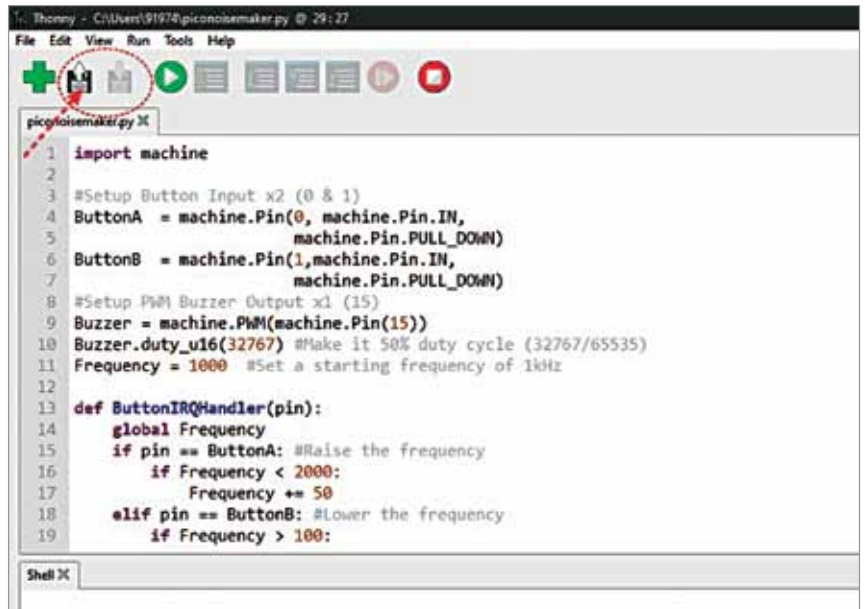


Fig. 4: Thonny editor window

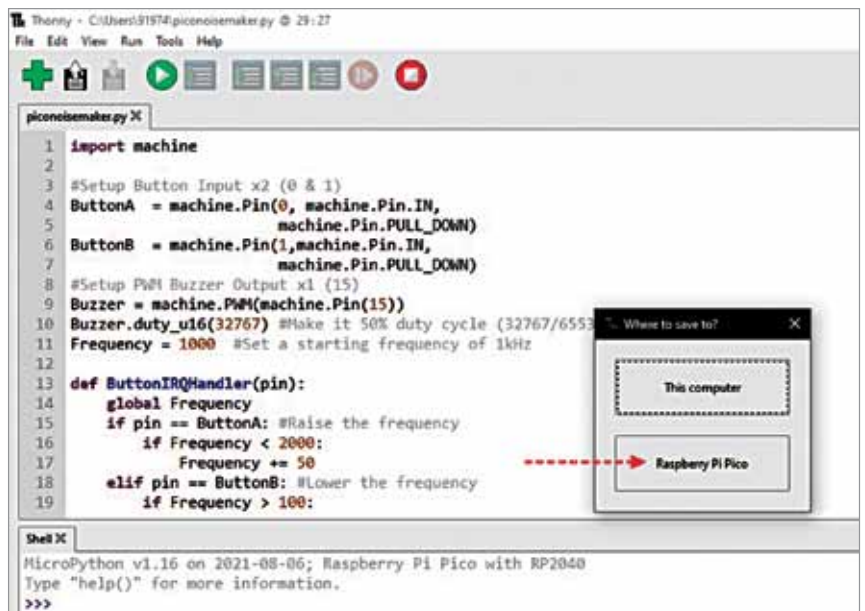


Fig. 5: Saving the Python code

motherboards, alarm systems, and other electronic devices. The tone output from the Raspberry Pi Pico board (TONE and GND) is quite low, so transistor S8050 is used to drive the 16-ohm sounder element (LS1).

The entire hardware setup can be operated from a stable 5V DC/USB power source. The simplest way is to plug the external USB power source into the onboard micro-USB connector, which will

power V_{SYS} and therefore the system from the USB 5V (V_{BUS}).

Software

Instead of looping fast to read the value of a pushbutton switch, the microcontroller can also be notified of a change through an interrupt request (IRQ). An IRQ lets the processor be interrupted from its main loop to do a thing before returning to the task it was doing earlier.