

Once
you stop
learning,
you start
dying.

—Albert Einstein

Amaze
Yourself!

Read Electronics For You

You'll realise how much you
didn't know, and didn't
know that you didn't know!

To Subscribe:
<http://subscribe.efy.in>

Scan This Code

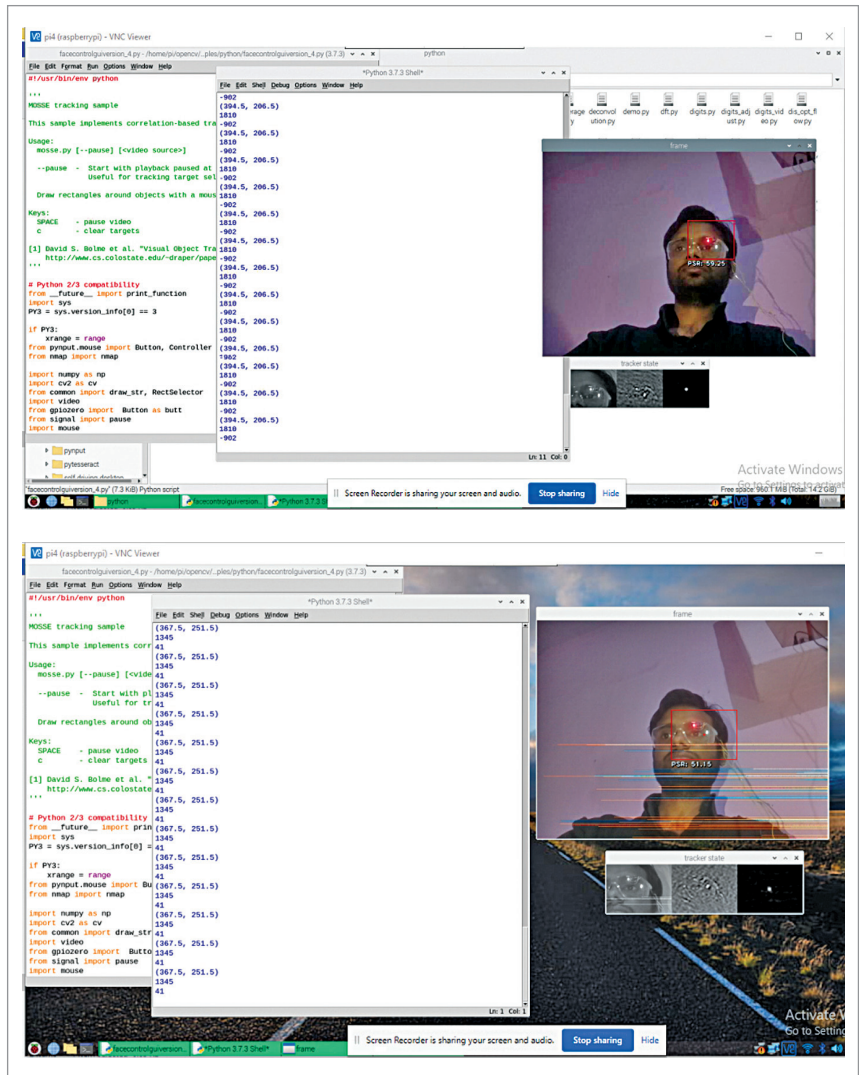


Fig. 11: Testing code and controlling GUI with an eye

blink sensor data.

Also, import the pynput module to create a virtual mouse input for the GUI of Raspberry Pi OS.

Next, create an *if* condition to check the eye status. If the eye status = blink, then set four seconds to determine if it is an intentional blink or a natural one. If the blink is intentional, pass the pynput command to virtual mouse left or right click.

Construction and testing

Put the eyeblink sensor on right side of the eye glasses and wire it to a Raspberry Pi pin. Connect a camera to the RPi board and place it more

than 15cm away from the middle of both the eyes, such that the entire face fits within the camera frame perfectly.

Wear the glasses and run the code. Make sure to mark the red light in the eye (as shown in Fig. 3) with a mouse to track. When successful, a person can operate a PC with eye movement. To move the mouse, move the eye in left, right, upward, and downward directions. To click the mouse, blink (shut) the eye for up to four seconds. **EFY**

Ashwini Kumar Sinha is a
technology enthusiast at EFY