

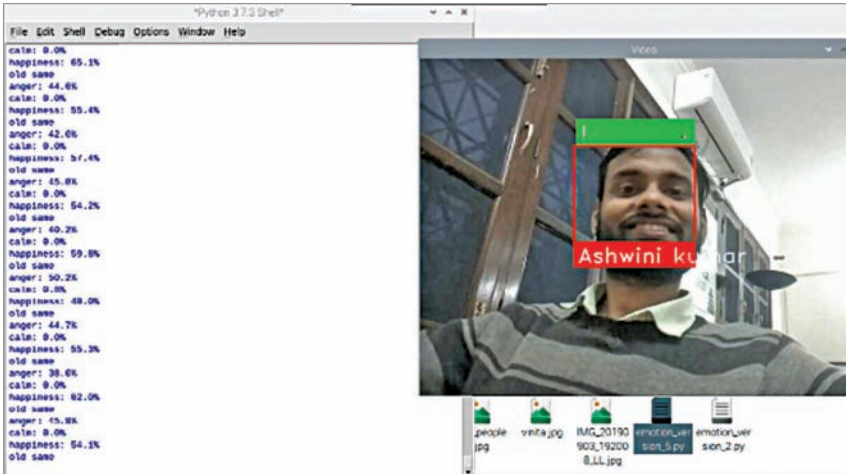


Fig. 16: Face detection



Fig. 17: Random robot dream

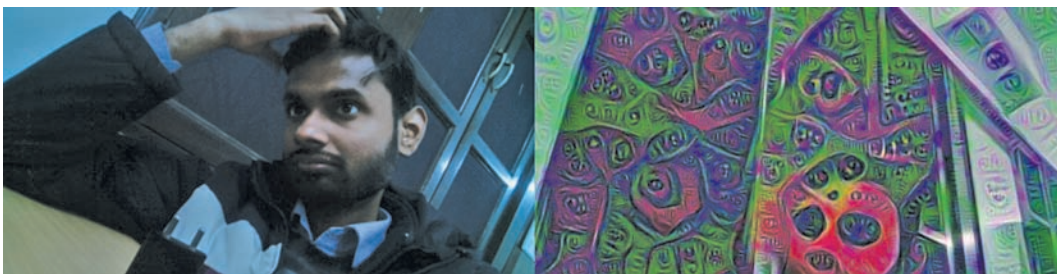


Fig. 18: Robot's dream generated from the saved incident captured by camera



Fig. 19: Original picture



Fig. 20: The robot's dream generated from the picture in Fig. 19

same path where the captured frame of facrecog.py image was saved. In the same folder, create a new Python file and then a script that runs the testpsycam.py file in certain intervals of time and makes it go to sleep mode, that is, off/on.

To see the dream image created by the robot, open the dream folder that is situated in the psycam folder. This completes the coding.

Connection and testing

Connect the Raspberry Pi Type-C USB port with 5V cable. Next, connect the Raspberry Pi camera using a ribbon cable to the Raspberry Pi camera port. Connect the eyes OLEDs and other parts as described in the earlier AI robot article published in November 2020 issue.

After setting and saving all the codes, test various features of the robot. Run the face.py and run.py scripts, and wait for a few seconds. The screen will then start showing the face and the robot will start talking

according to the face it detects (see Fig. 16).

To check the dream of the robot, run the code py-cam.py. The robot will start capturing the pics and start creating a dream. You may open the dreams folder and see the saved picture of the robot's dream (see Fig. 17 through Fig. 20).

EFY

Ashwini Kumar Sinha is a technology enthusiast at EFY