

ENABLING TECHNOLOGY EVERYWHERE

HARWIN
Connect with confidence




Scan here for more

Harwin's connector products are proven to perform in extreme conditions, with shock, vibration and temperature range rigorously tested.

Micro connectors start at 1.25mm pitch delivering 2A per contact, up to 8.5mm and 60A - covering a wide range of applications from charging infrastructure to battery management systems.

With our quality, service, support, and highly reliable products, you can depend on Harwin.

Connectors shown actual size

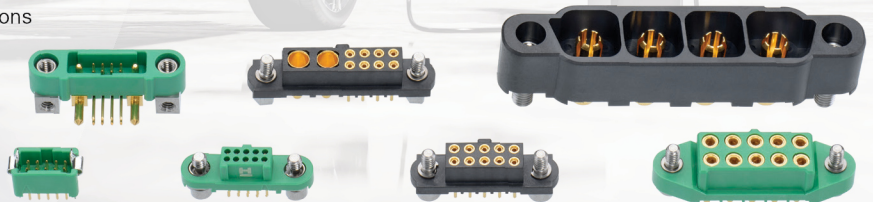

harwin.com

Don't Be A Loser!

You don't know how much
you don't know.

Read

electronics
FOR YOU

to keep up-to-date with the tech world

To Subscribe:
<https://subscribe.efy.in>

Scan This Code



Also available at all leading magazine outlets



DISPLAY
INDUSTRIAL SOLUTIONS
VISIONS

- 2" - 4.3" incl. Touch
- Object based Graphic
- USB, SPI, I²C, RS232
- Control and Calculation
- Digital I/Os, Analogue in
- As stand-alone or
- Connected to any μ C
- WYSIWYG Tool
- Waterproof mounting
- 1000 cd/m²
- Brilliant IPS Displays
- Demopack available



SMART HMI

www.lcd-module.com

