

within its range, its output becomes low, and the solenoid coil gets de-energised. Thus, water flows from the tap only when someone is within its range and stops automatically when a person moves away.

Construction and testing

Being quite simple, the circuit can be assembled on a general-purpose PCB. After assembling the circuit, enclose it in a suitable box. Install the motion sensor in front of the handwash sink in such a way that when someone comes in front of it, the tap water starts flowing.

In non-repeatable mode (L: single trigger in Fig. 3), the time for water flow can be pre-set through the time-delay adjustment pot (on right hand side in Fig. 3). Sensitivity can be set by sensitivity-adjustment pot (on left hand side in Fig. 3).

EFY Notes. 1. Fix the solenoid valve in proper water flow direction.

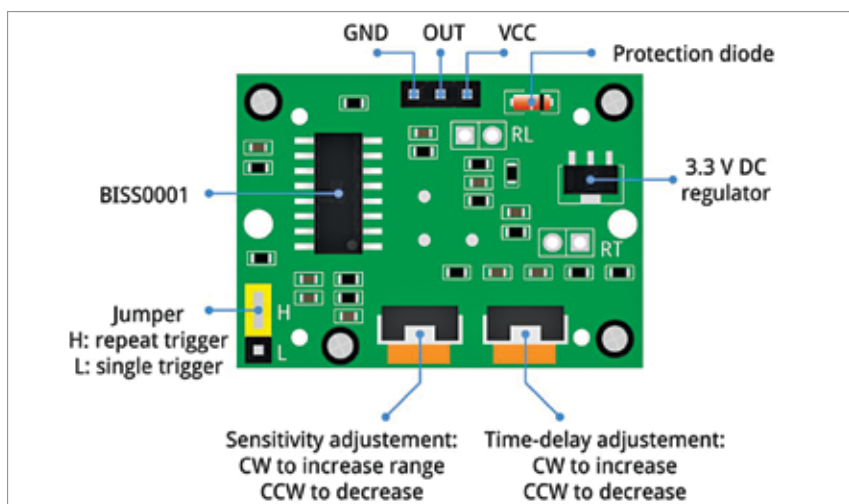


Fig. 3: Back side of the motion sensor

The direction is marked in the valve housing.

2. There is a minimum pressure required for proper functioning of the valve. The water storage tank should be at a height of at least three metres above the valve, otherwise use of a water pressure pump would be required.

EFY



A. Samiuddin, a circuit designer, is B.Tech in electrical and electronics engineering. His interests include LED lighting, power electronics, microcontrollers, and Arduino programming

Enhance Your Hands-on Skills! Offering 150+ DIY Kits.

Price
₹100



Water level Indicator

Price
₹175



Smoke Alarm

Price
₹200



Power Supply Failure Alarm

Price
₹100



Musical Touch Bell

Price
₹225



Automatic Night Lamp With Morning Alarm

Price
₹250



Moisture Monitor For Plants

Price
₹275



Remote Control For Home Appliances

And Many More...

kitsNspares
.com
For the 'engineer' in you

www.kitsNspares.com

DIY PROJECT KITS | SELF-LEARNING KITS | DEVELOPMENT BOARDS | ELECTRONICS COMPONENTS

For any query, email: info@kitsnspares.com call: +91-9811155335