

not only no concession on quality or reliability but even improved specifications compared to their predecessors.

Traco Electronic AG
www.tracopower.com

Buck-boost converter

The recently-introduced RECOM RBBA3000 buck-boost, non-isolated, DC/DC converter features a maximum 3kW output power rating in an industry-standard half-brick baseplate-cooled package. Input range is 9V DC to 60V DC, and output voltage and maximum current can be user-programmed from



0V DC to 60V DC and 0A to 50A, respectively. Programming

can be via a single resistor or by an externally applied voltage. A particular feature is that the buck-boost topology utilised allows output voltage to be set lower or higher than input voltage. With its excellent 98 per cent conversion efficiency, RBBA3000 provides full power over an operating temperature of -40°C up to +85°C when appropriately cooled.

Load current can be monitored from a current share pin, which can also be used to parallel two modules to provide up to 100A output with active load balancing. The converter complies with EMC standard EN55024 and EN 55032 class A and B with an external filter.

RECOM Asia Pte Ltd
https://recom-power.com

Silicon solution for Actuator Sensor Interface

Renesas Electronics has introduced ASI4U-V5 ASSP, industry's first silicon solution to fully implement ASi-5 (Actuator Sensor Interface version specification version 5) standard for industrial network equipment. ASi-5 offers



superior performance and usability over ASi-3, delivering 1.27ms

cycle time, 200m cable length and 96 slaves per segment. The field-proven ASSP delivers an easy-to-use fieldbus integration option for developers working with sensors, actuators and other industrial equip-

ment requiring easy and cost-efficient fieldbus connectivity.

Renesas Electronics Corp.
www.renesas.com

System on module

iWave Systems has launched a new system-on-module (SoM) based on NXP i.MX 8M Mini applications processor. The SoM features a powerful combination of up to 4x Arm Cortex-A53, 64-bit processor and 1x Arm Cortex-M4F core. Advanced features such as flexible LPDDR4 and eMMC memory options, sophisticated audio, video, graphics, high speed wired/wireless connectivity and a wide range of I/O interfaces make



it ideal for low-power and high-performance embedded applications.

iWave Systems
www.iwavesystems.com

Flash microcontroller

Holtek has released its new smoke detector-dedicated flash MCU, BA45F5250. The device includes a fully-integrated smoke detector AFE, a dual-channel IR LED constant current driving circuit as well as a 16-bit voice D/A converter. The device will find excellent use in smoke detection products, which require voice function, wireless networking or larger program memory capacity, such as vocal smoke detection alarms, NB-IoT smoke-detection alarms or Wi-Fi smoke-detection alarms.

Holtek Semiconductor India Pvt Ltd
www.holtek.com

TEST & MEASUREMENT

PCI Express test solution

Anritsu has released its new PCI Express test solution supporting Gen5 Base Specification stressed receiver test using the company's signal quality analyser R MP1900A series with installed automation software for base specification calibration and BER measurement

software supporting SKP Filter. With this release, customers can easily configure a measurement environment for




early-stage development of Gen5 IP and devices, helping faster introduction of PCI Express 5.0.

Moreover, the all-in-one MP1900A has every pattern generation, error detection, jitter generation and noise generation function required for PCI Express tests. And since Gen1 to Gen5 transmission speeds are supported by software upgrades to the same equipment configuration, customers benefit from a high cost-performance PCI Express test solution at lower equipment investment.

Anritsu India Pvt Ltd
www.anritsu.com

Thermal imaging system

FLIR designed ETS320 for hands-free use with a microscope-style stand that is quick to set up—to keep focus on work, not on camera controls. It is an afford-

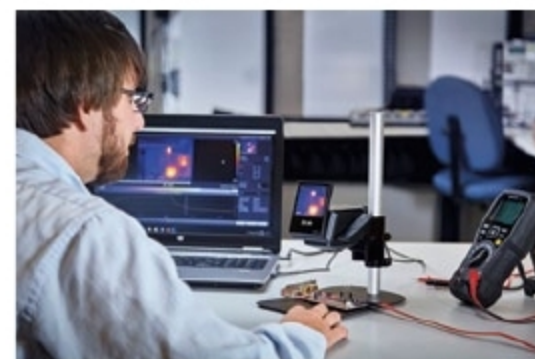

able solution for electronic board and device evaluation, and takes guesswork out of thermal testing for fast discovery of hot spots and potential points of failure. Key features are:

- 320 × 240 IR sensor offers 76,800 points of non-contact temperature measurement
- Measurement accuracy of $\pm 3^{\circ}\text{C}$ promotes quality assurance and factory acceptance of PCBs
- Crisp LCD display provides immediate thermal feedback
- Includes FLIR Tools software to quickly import, edit and analyse images

FLIR Systems India Pvt Ltd
www.flir.in