

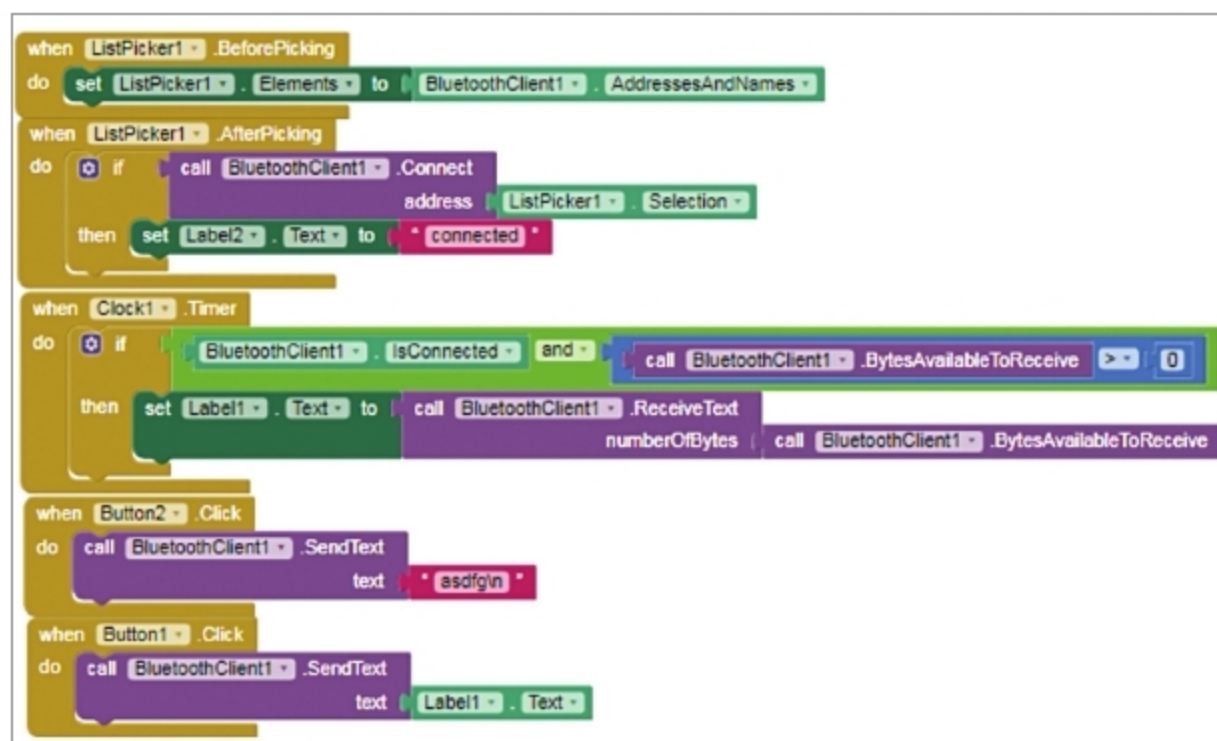


Fig. 7: App Inventor blocks for the smart lock layout

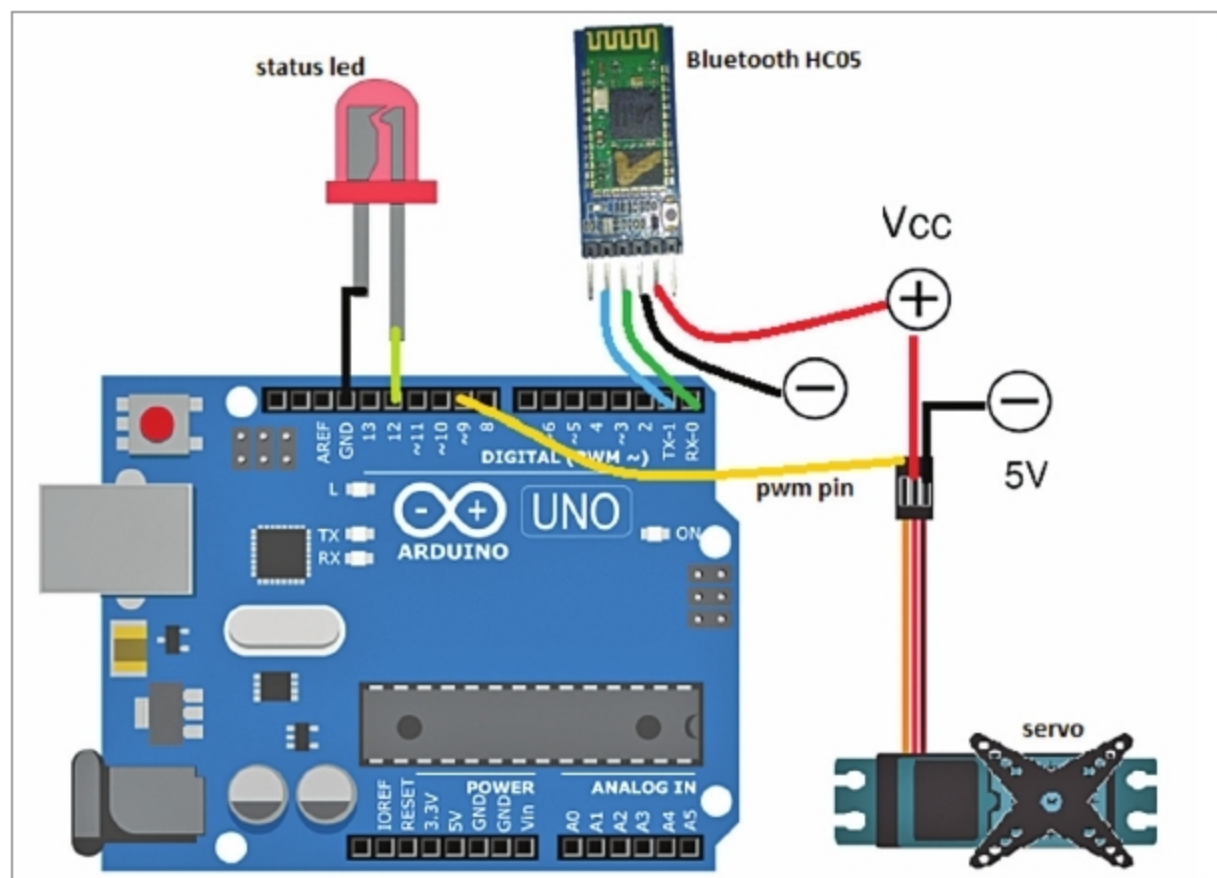


Fig. 8: Complete circuit connections of smart lock system

based smart wireless locking system and follow the steps given below:

1. Open the installed OTP_Smart-lock app and turn on the Bluetooth in your Android phone.
2. Touch on the Bluetooth icon to get a list of Bluetooth connections for pairing.
3. Select HC-05 from the list. On successful pairing, you will get a 'con-

nected' message on the app.

4. Touch on the key icon to send the device ID. If the device ID of app and lock matches, then an OTP will be received in the app next to the key icon.

5. Touch the lock icon and enter OTP in the text bar. If everything is fine, the servo motor will move to unlock the lock. At the same time, the onboard LED of Arduino will light up, indicating successful unlocking of the smart lock system. **EFY**

EFY Note
The source code
of this project
is available
for free download
at source.efymag.com

Ashwini Kumar Sinha is an electronics hobbyist and tech journalist at EFY

Now Book Your Ads Online

And Get

25%

Instant Discount!

ALL CREDIT CARD / DEBIT CARD /
NET BANKING ACCEPTED



You can even
select the position
of your choice.



Facility is
available for
multiple insertions.



Pay online and
get confirmation
of release.

Check out on
www.efymag.com/advertise

