

over-voltage, over-current, and over-temperature and has a line and neutral fusing for medical applications. No-load input current is only 100mW at 230V AC.

RECOM

www.recom-power.com

TEST & MEASUREMENT

Power measurement instrument

Boonton Electronics, a provider of enhanced test instrumentation and sensors, has announced the launch of the new PMX40 RF power metre, a high-performing radio frequency (RF) power measurement instrument.



By combining the utility of a traditional benchtop instrument, performance of modern USB RF power sensors, and simplicity of a multi-touch display, it delivers a high utility value to engineers and technicians for designing and testing. The PMX40 streamlines RF testing and is optimal for broad use in the semiconductor, military, aerospace, medical, and communications industries.

Boonton Electronics

www.boonton.com

Probe card

FormFactor, a semiconductor test and measurement supplier, has reached a high-throughput milestone in dynamic random access memory (DRAM) wafer testing with the release of the SmartMatrix 3000XP probe card. The new SmartMatrix 3000XP probe card allows DRAM manufacturers to test 3000 dies or more at once using FormFactor's proprietary Tester Resource Enhancement (ATRE) and MEMS probe technologies. The new breakthrough allows the simultaneous test of approximately 1000 additional dies over previous capabilities and can reduce the test cost per die by more than 25 per cent.



The SmartMatrix 3000XP probe card's key features include proprietary TTRE (Terminated Tester Resource Enhancement) technology, ultra-high switch-density ATRE (Advanced Tester Resource Enhancement) components,

proven low-force 3D MEMS probe technology and test clock rates up to 200MHz at wafer sort. The 1Z DRAM node will move to high volume production later this year.

FormFactor

www.formfactor.com

Testing equipment

Keysight Technologies has announced a cost-effective test solution, Ixia AresONE 400 gigabit Ethernet (GE) that enables data centre operators to leverage 400GE capable test ports to link with and test legacy 100GE network equipment.

The new test solution is based on pulse-amplitude modulation level-4 (PAM4) signalling interconnection to 100GE non-return-to-zero (NRZ) networking equipment ports using Credo's HiWire active electrical cable (AEC) technology. It also provides speed-shifting of signalling rates and forward error correction (FEC) conversion.

As of now, many data centre operators have widely deployed 100GE NRZ-based technologies. However, higher speeds such as 400GE provide a new mixed signalling and mixed FEC in a multi-rate environment. This new environment produces unique challenges relating to the integration of PAM4-based 400GE and 100GE-capable switch ports with existing 100GE NRZ signalling-based switch port technology.

Therefore the combined Keysight and Credo test solution bridges the gap between incompatible PAM4- and NRZ-encoded signalling. It removes potential testing issues to improve overall performance validation and quality. The AEC cable technology performs the necessary conversions to allow a PAM4-encoded port to interoperate with an NRZ-encoded port.

Keysight Technologies

www.keysight.com

MISCELLANEOUS

Robot controller

ADLINK Technology, an edge computing solution provider, has launched ROScube-I, in collaboration with Intel. The ADLINK ROScube-I series is a ROS

2-enabled robotic controller based on Intel Xeon E, 9th Gen Intel Core i7/i3, and 8th Gen Intel Core i5 processors.



The series features an I/O connectivity that supports a wide variety

of sensors and actuators for meeting the needs of a wide range of robotic applications.

The ROScube-I supports an extension box for convenient functionality and performance expansion with Intel VPU cards and the Intel Distribution of OpenVINO toolkit for computation of artificial intelligence (AI) algorithms and inference.


Robotic systems based on the ROScube-I are supported by ADLINK's Neuron SDK, a platform specifically designed for professional robotic applications such as autonomous mobile robots (AMR).

ADLINK Technology

www.adlinktech.com

Raspberry Pi audio amplifier

Infineon Technologies has developed a fully self-contained Raspberry Pi audio amplifier Hardware Attached on Top (HAT) board. It offers high definition audio at boom box power

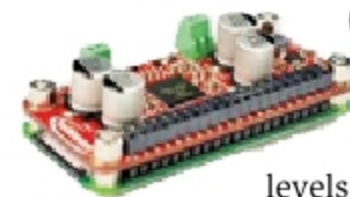

levels in a small form factor. Infineon's multilevel technology ensures minimum size and consumption, state-of-the-art power efficiency, and HD audio quality for Raspberry Pi users and makers. The target field of use is active speakers with wireless music streaming.

The board (KIT_40W_AMP_HAT_ZW) is compatible with Raspberry Pi Zero W and Raspberry Pi 3 and 4. It leverages the MERUS multilevel class D amplification enabled by the MERUS MA12070P amplifier, which allows for filter-free amplifier design that does not need to use a filter-coil at the output filter. This significantly reduces the BOM cost and enables PCB area reduction.

The board furthermore provides high output power in small form factor up to 40W instantaneous peak power at 4 Ohms.

Infineon Technologies

www.infineon.com