

Share Your Knowledge

If you are an expert in your field of electronics, why not share your knowledge with the world?



Electronics For You invites electronics professionals and industry experts to write articles on their area of expertise and interest from different perspectives

Some of the topics we want you to write about are:

- Smart World
- Artificial Intelligence
- Autonomous Cars
- Bio-Medical (Healthcare)
- Strategic (Defence) Electronics
- Audio-Video
- Project Reports

So if you have an interesting topic or original article to share, please let us know at efyeditorial@efyindia.com

We would love to hear your good ideas too!

electronics
YOURS SINCE 1969 **FOR YOU**

Next, mount the Raspberry Pi camera (connected to Raspberry Pi board) carefully near the OLED displays. Attach a servo motor

near the mouth of the robot head. This will allow the robot's jawline to open and close (refer Fig. 4).

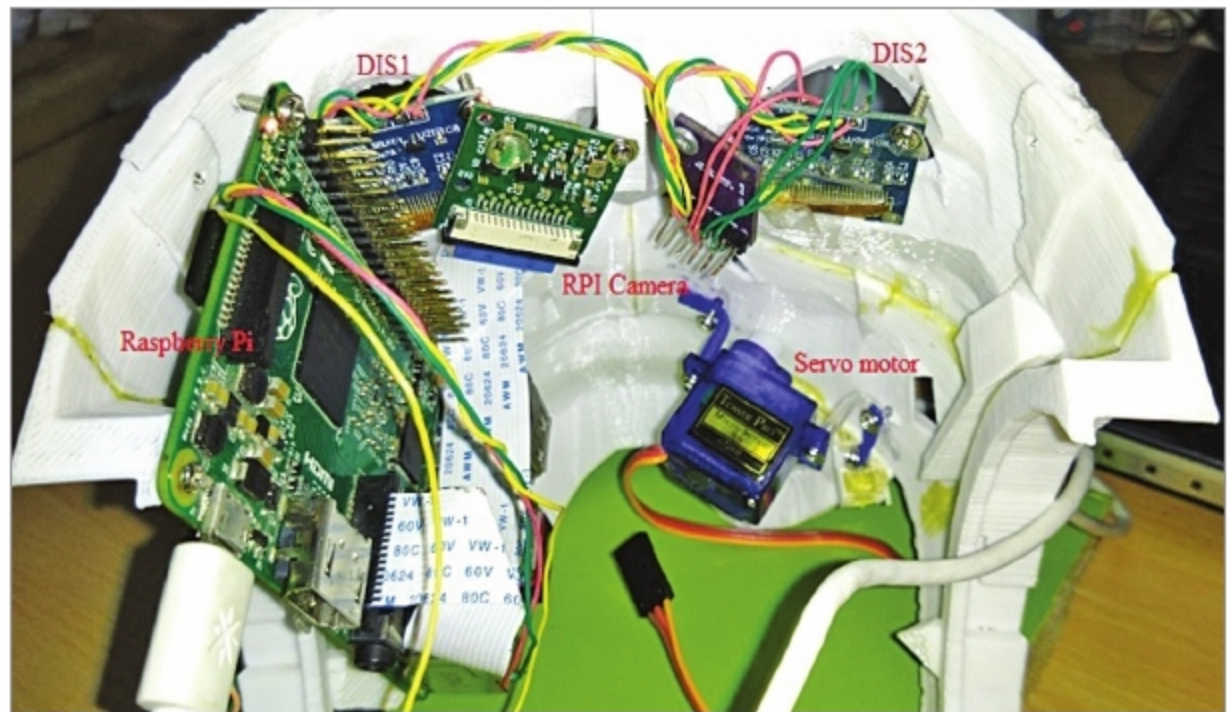


Fig. 3: Robot head assembly



Fig. 4: Servo motor attached to robot's jawline

Robot head support

Firmly fix the second servo motor on a cardboard or wooden base with the help of screws or hot glue. This will provide up and down movement to the robot head.

To make a sturdy support, attach three thin metallic rods near the second servo

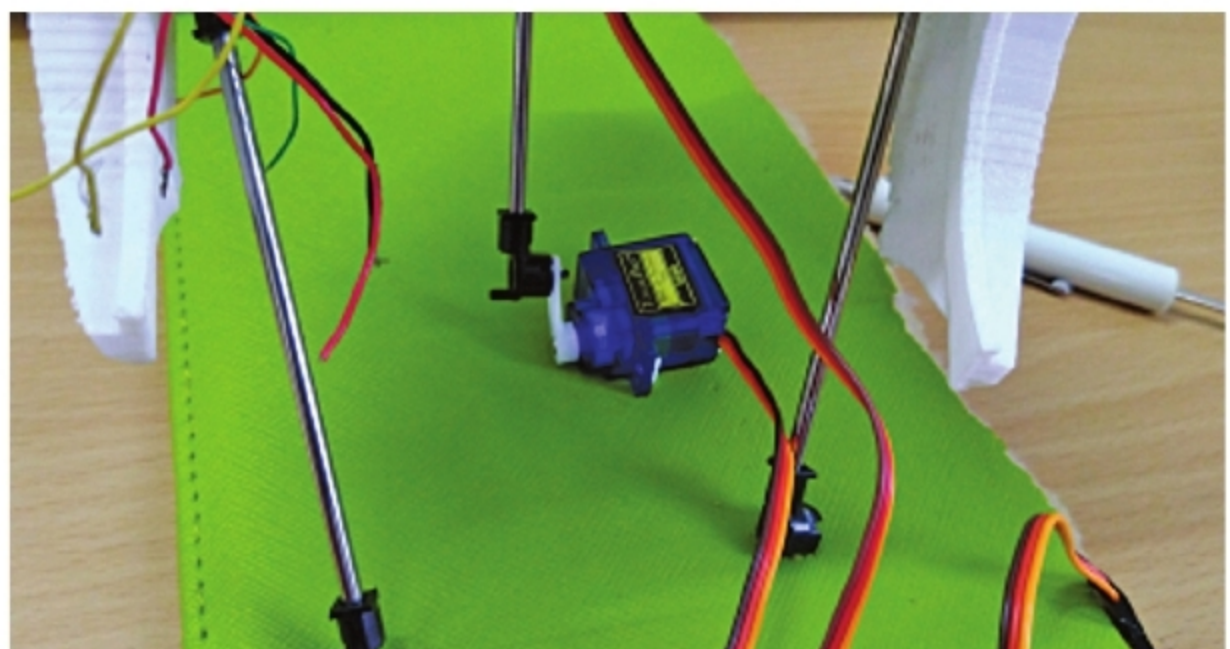


Fig. 5: Second servo motor placed on a cardboard base