

er enables smartphones, power banks, and portable industrial and medical equipment to wirelessly charge other mobile devices and accessories that



also have wireless charging capabilities.

The P9415-R features up to 5W of transmit power capability in transmitter/receiver (TRx) mode, as well as receive up to 15W on Qi transmitters, enabling quick and convenient mobile device charging on the go.


The P9415-R combines receiver and transmitter capabilities, allowing smartphones, smartwatches, wireless earbuds, and other devices to be wirelessly charged simply by placing them on top of a smartphone or other industrial and medical portable devices.

In WattShare TRx mode, the P9415-R enables these mobile devices to change the direction of power flow and deliver up to 5W of power to charge other devices. The same wireless power coil and P9415 circuitry can be used for both receiving and transmitting power wirelessly.

Renesas Electronics
www.renesas.com

RGB-LED driver

Melexis, a global microelectronics engineering company, has launched MLX81116, a multichannel RGB-LED driver, which supports the MeLiBu high-

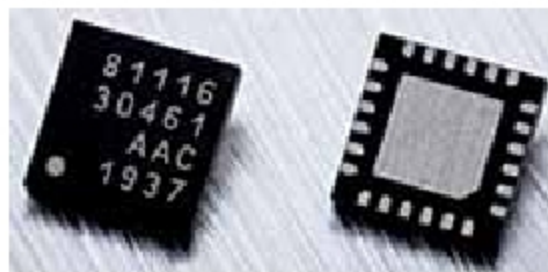

speed communication IP for enabling intelligent automotive lighting and enhancing the latest safety features.

The MeLiBu controls all individual LEDs separately in the lightbar to produce lighting effects as required by the vehicle. The intelligent RGB-LED controller also provides real-time compensation for any LED colour drift caused by environmental changes.

The MLX81116 driver IC has an extremely wide dimming range that allows optimal brightness adjustment for day time and night driving. The IC

fulfils automotive ISO 26262 functional safety requirements up to safety integrity level B (ASIL B) and also features low EMI emission and high immunity.

Melexis
www.melexis.com

Tantalum chip capacitors

AVX Corporation has released a new series of high-CV resin-moulded, surface-mount tantalum chip capacitors with a miniature and low-profile face-down design optimised for automotive electronics applications.



The new F98-AJ6 series capacitors are currently available in miniature 0603 and 0805 chip sizes with maximum heights of just 1.0mm and 0.80 ± 0.10mm, respectively.

The new series capacitors have been tested and proven to deliver high capacitance and high volumetric efficiency in a variety of secondary power line circuits within automotive applications that help boost performance and provide critical space savings.


Ideal applications for the series include secondary power line circuits in automotive applications, including infotainment and cabin electronics systems, camera modules, and digital millers, as well as select industrial applications.

AVX Corporation
www.avx.com

TEST & MEASUREMENT

Oscilloscope

Yokogawa Test & Measurement Corporation has developed and released the DLM5000 series mixed-signal oscilloscopes that offer high-speed

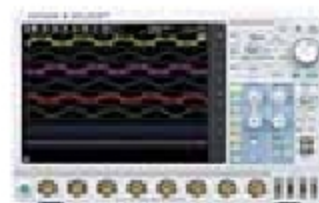

processing function capability to handle large data volumes. The DLM5000 series provides optimal solutions to developers of the advanced driver-assistance system (ADAS), mechatronics, industrial robots, and the electronic control units (ECUs).

The DLM5000 series models have either four or eight analogue input

channels. With a single DLM5000 oscilloscope, it is possible to simultaneously view signals and inputs from up to eight analogue signals and a 16-bit logic channel (32-bit logic channel optional).

When simultaneously measuring inputs from all analogue channels, a maximum sampling rate of 2.5 GS/s can be maintained. The DLM5000 user interface includes a jog shuttle, rotary knobs, and a large touch screen, which greatly simplifies the viewing and analysis of waveforms.

The series comes with a trigger function that supports the Clock eXtension Peripheral Interface (CXPI) in-vehicle LAN standards.

Yokogawa Test & Measurement Corporation
www.yokogawa.com/ymi

Spectrum analyser

With the addition of the SSA3032X-R model, Siglent's SSA3000X-R family of



real-time spectrum analysers now offers an extended frequency range of 9kHz to 3.2/5.0/7.5GHz. Like the earlier released SSA3050X-R and SSA3075X-R models, the SSA3032X-R supports real-time analysis bandwidth up to 40MHz.

It's a powerful and flexible tool that solves modern RF spectrum challenges like hopping frequency, conflict channel, and spectrum interference.

Additionally, all the SSA3000X-R series real-time spectrum analysers feature vector network analysis (VNA) capability. The instruments will now have the ability to perform S11 and S21 measurements on RF components and circuits. The data can be graphed in a number of common formats, including Smith and polar charts.

Siglent has also introduced the SSA3015X plus spectrum analyser with a frequency range from 9kHz to 1.5GHz.

Siglent
www.siglentna.com

SENSORS

Security image sensor

OmniVision Technologies, a developer of advanced digital imaging solutions, has introduced the OS02G10 security image