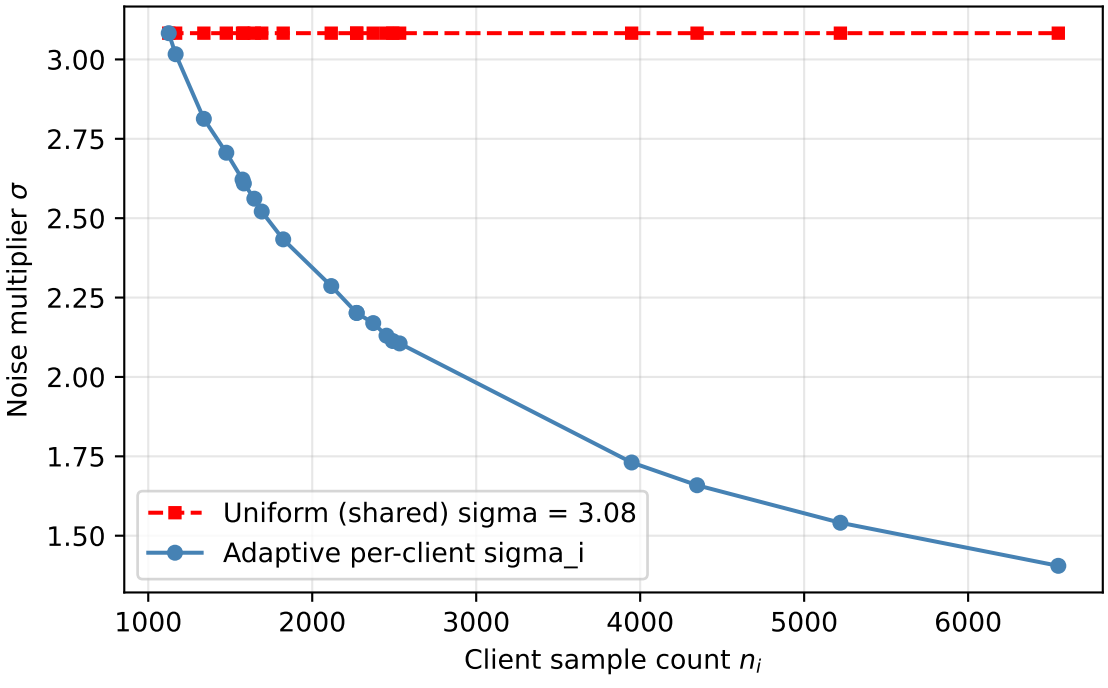
Per-client noise allocation, CIFAR-10 seed 42, 20 UAVs
Noise multiplier σ
3.00
2.75
2.50
2.25
2.00
1.75
1.50
1000
2000
3000
4000
5000
6000
Client sample count n_i
Uniform (shared) sigma = 3.08
Adaptive per-client sigma_i