


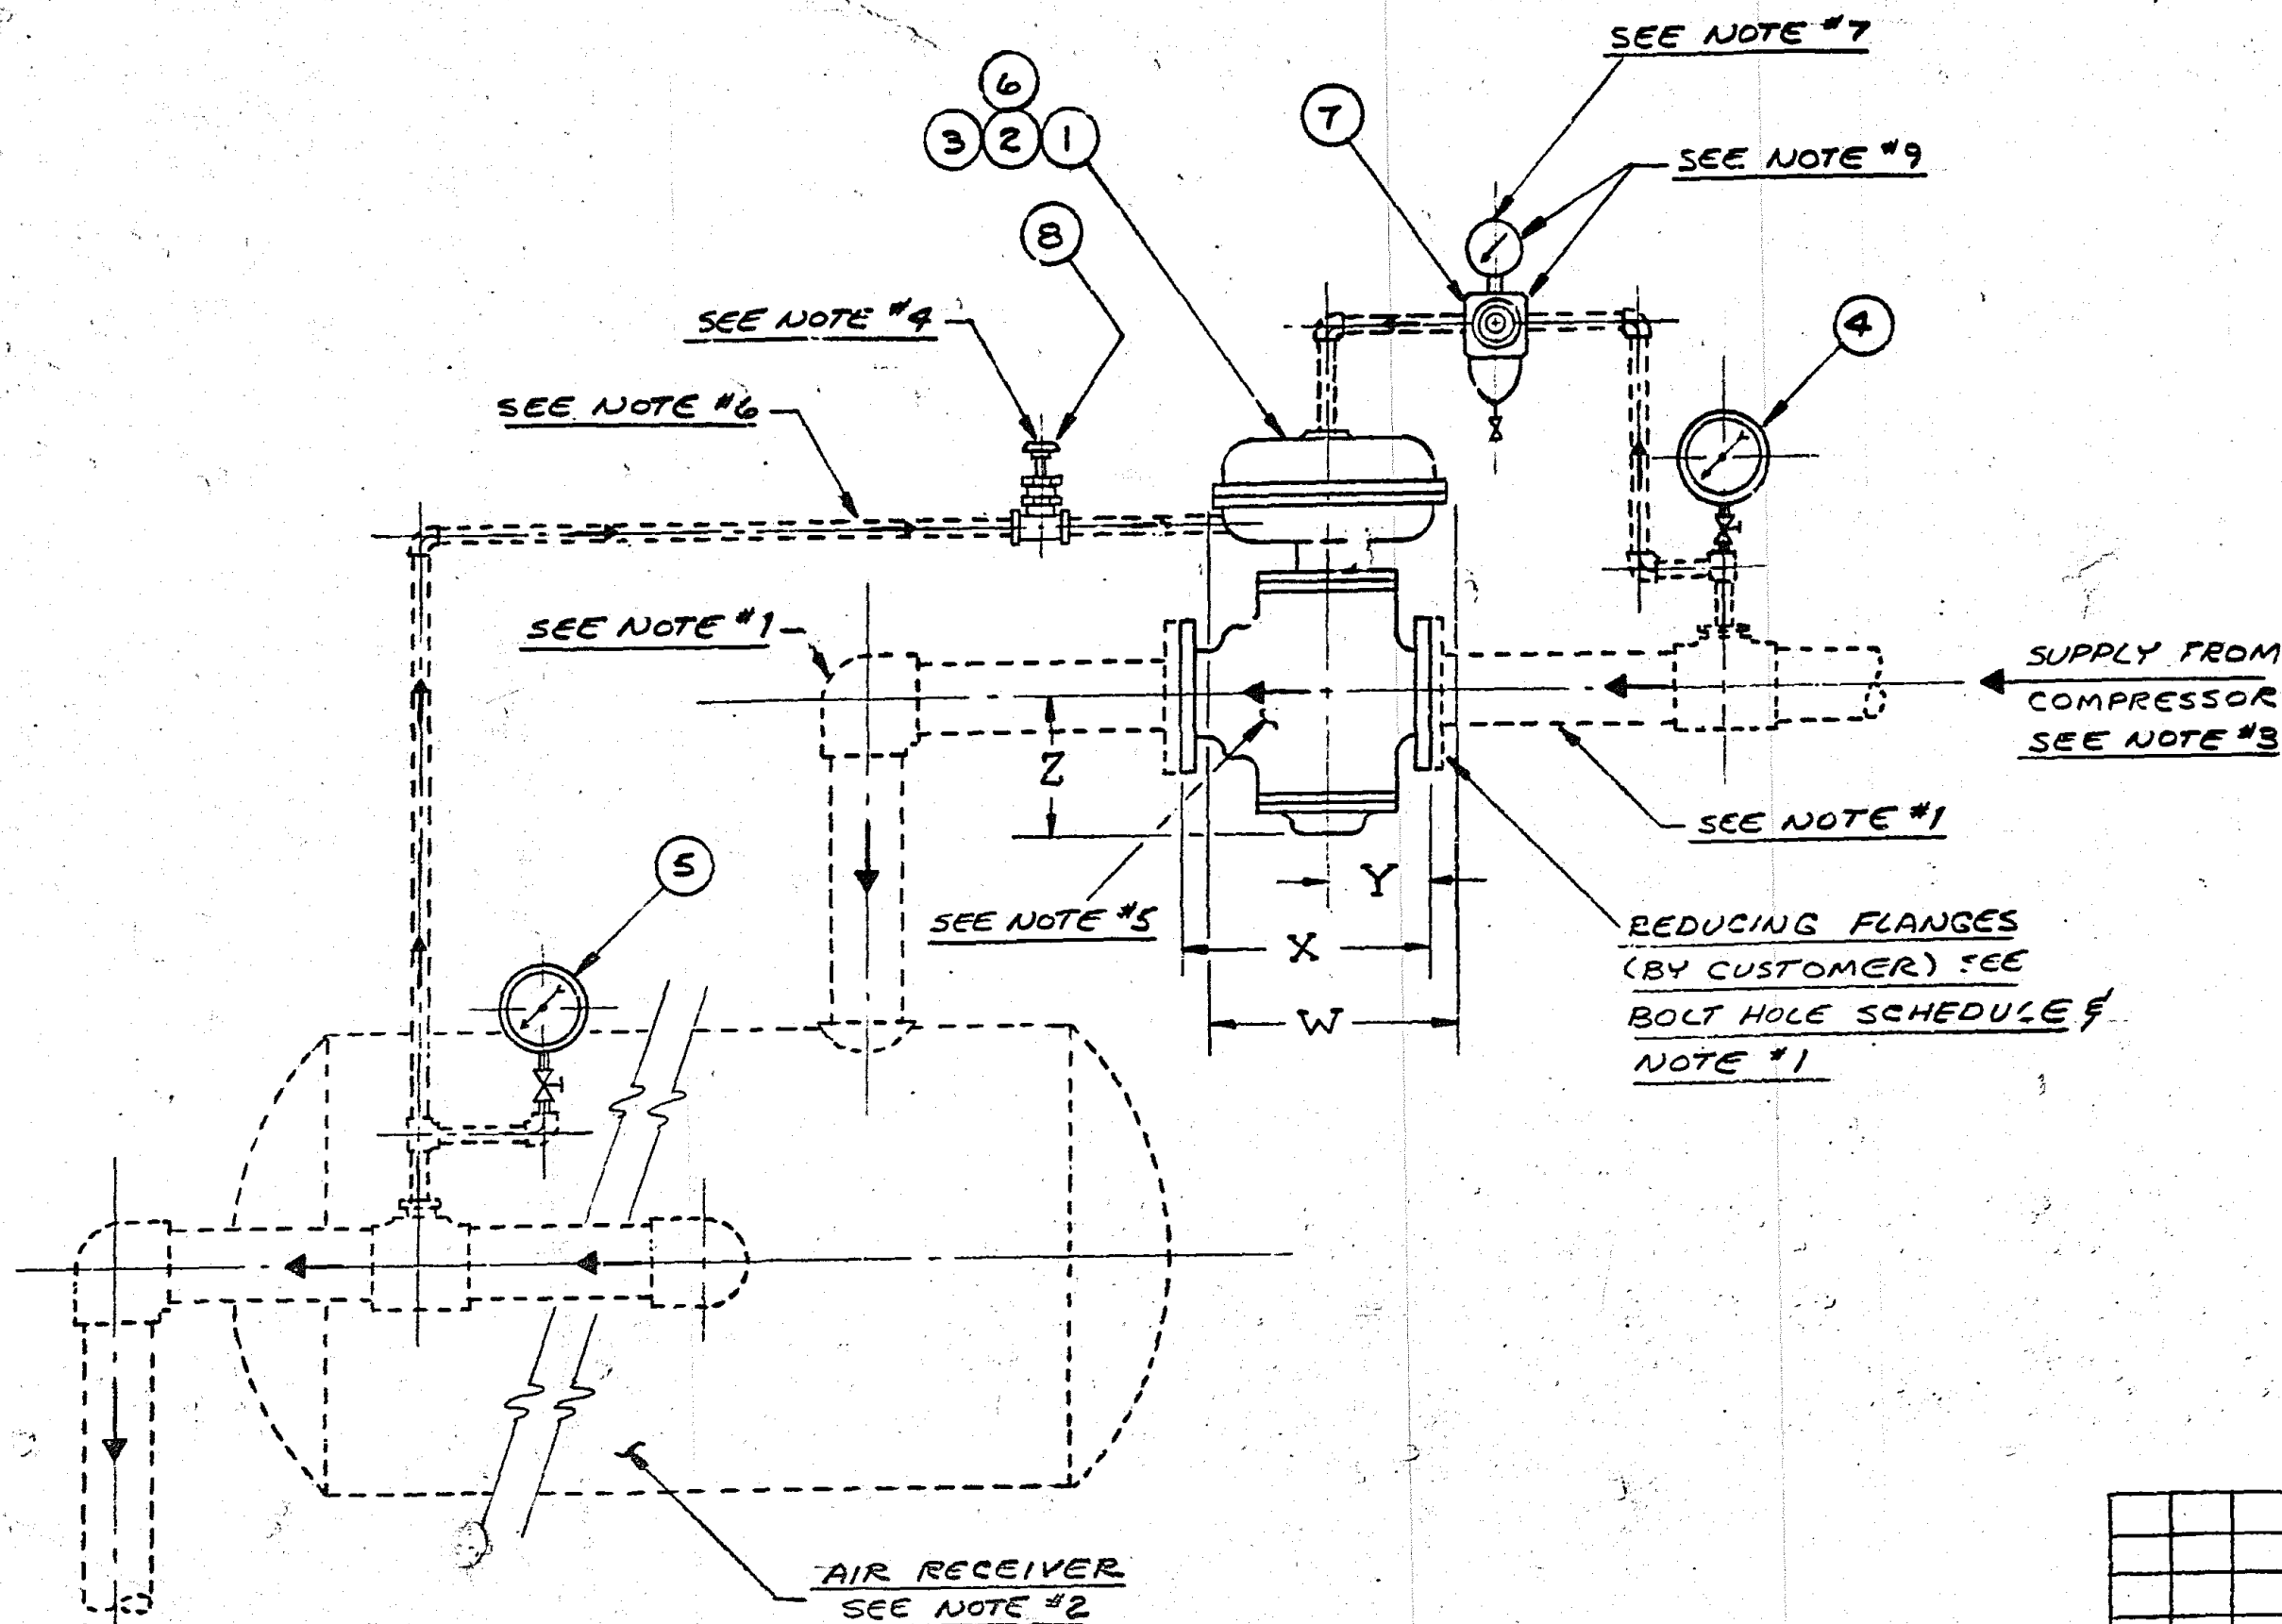

-NOTES:-

1. PIPING BY CUSTOMER - 3" NPT FOR 6 1/2" SECTION MACHINES, 4" NPT FOR 10" SECTION I.S. MACHINES, 5" NPT FOR 12 1/2" SECTION MACHINES.
2. AIR RECEIVER - BY CUSTOMER - NOT LESS THAN 10 CU. FT PER SECTION CAPACITY. LOCATE BETWEEN REGULATOR AND MACHINE. PIPING FROM RECEIVER TO MACHINE SHOULD BE AS SHORT AS POSSIBLE.
3. TO MAINTAIN OPERATING AIR PRESSURE $\pm 1/4$ P.S.I. THE SUPPLY AIR PRESSURE TO THE VALVE MUST BE A MINIMUM OF 5 P.S.I. ABOVE THE DESIRED OPERATING AIR PRESSURE.
4. THIS NEEDLE VALVE IS SHIPPED IN A FULLY OPEN POSITION, IF THE SYSTEM IS UNSTABLE DUE TO PRESSURE FLUCTUATION, SLOWLY CLOSE THIS VALVE UNTIL SYSTEM BECOMES STABLE. THIS VALVE SHOULD NEVER BE IN A FULLY CLOSED POSITION.
5. INSTALL WITH ARROW ON BODY IN DIRECTION OF FLOW.
6. INSTALL AN EXTERNAL SENSING LINE (1/2" O.D. TUBING OR 3/8" N.P.T. MIN.) TO A POINT DOWN-STREAM PREFERABLY AT GAGE LOCATION.
7. TO INCREASE PRESSURE SETTING TURN THE ADJUSTING KNOB ON PILOT VALVE CLOCKWISE TO DECREASE TURN COUNTERCLOCKWISE.
8. FOR AIR SERVICE TO 300°F, 150°C
9. PILOT VALVE, GAUGE AND FILTER ARE SHIPPED UNASSEMBLED. ASSEMBLE AS SHOWN AT INSTALLATION. INSTALL PILOT VALVE GAUGE AND FILTER WITHIN REACH OF I.S. MACHINE OPERATOR AND AS CLOSE TO I.S. MACHINE AS POSSIBLE.

VALVE NUMBER	VALVE SIZE	"W" DIM	"X" DIM	"Y" DIM	"Z" DIM	BOLT CIRCLE	Nº OF HOLES	DIA OF HOLES	DIA OF BOLT	CONN'G. PIPE SIZE
1048-65229	2 1/2" NPT	11 1/4"	10 7/8"	5 1/16"	6 5/16"	5 1/2"	4	3/4"	5/8"	3" NPT
1048-65235	3" NPT	11 1/4"	11 3/4"	5 1/2"	7 5/8"	6"	4	3/4"	5/8"	4" NPT
1048-65230	4" NPT	11 1/4"	13 7/8"	6 1/16"	7 5/8"	7 1/2"	8	3/4"	5/8"	5" NPT
7129-00106-000-00	3" PIPE FLANGE	16"	11 3/4"	5 7/8"	6 1/4"	6"	4	3/4"	5/8"	4" NPT

QUANT.	PART NUMBER	IND	DESCRIPTION
1	7129-00108-000-00	8	NEEDLE VALVE
1	7129-00107-000-00	7	PILOT VALVE W/FILTER AND GAUGE
1	7129-00106-000-00	6	3" PRESSURE REDUCING VALVE
1	1048-56622	5	0-60 P.S.I. GAUGE
1	1048-56623	4	0-100 P.S.I. GAUGE
1	1048-65230	3	4" LOADING CONTROL VALVE
1	1048-65225	2	3" LOADING CONTROL VALVE
1	1048-65229	1	2 1/2" LOADING CONTROL VALVE

QUANT.					PART NUMBER	IND	DESCRIPTION
100	4	3	2	1	GROUP NPS		
10 SECTION I.S. 6" x 6" MACH.	8 SECTION I.S. 4 1/2" MACH	12 1/2 SECTION I.S. 2 1/2" MACH TYPE E	10 SECTION I.S. 2 1/2" x 2 1/2" MACHINE	6 1/2 SECTION I.S. 2 1/2" x 2 1/2" MACHINE	DESCRIPTION OF GROUPS		

CONFIDENTIAL THIS DRAWING AND THE SUBJECT MATTER IS THE EXCLUSIVE PROPERTY OF GLASS MACHINE, INC. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF GLASS MACHINE, INC. AND WILL BE RETURNED TO GLASS MACHINE, INC. UPON REQUEST.		ABAE FINISH 03 UNLESS NOTED. BREAK ALL SHARP CORNERS, 1/64 RAD. THIS PRINT SUPERSEDES PREVIOUSLY DATED PRINTS THIS PART NUMBER	STANDARD TOLERANCES DRILLED HOLES 1/8" TO 1" + .003 - .000 1" TO 1 1/2" + .005 - .000 1 1/2" TO 3" + .010 - .000 REAMED HOLES 1/8" TO 1" + .0005 - .000 1" TO 1 1/2" + .0005 - .000 1 1/2" TO 3" + .001 - .000 THREADS 2A OR 2B	STANDARD TOLERANCES FOR FINISH DIMENSION NOT OTHERWISE NOTED DECIMAL + OR - .005 FRACTIONAL 0" TO 5" + OR - 1/64 5" TO 24" + OR - 1/32 OVER 24" + OR - 1/16 FINISH TO A.S.A. (X) MICRO FINISH SHOWN	GLASS MACHINE, INC. VINELAND, NJ PHONE 609-693-2282 TITLE: LAYOUT OF BALANCED AIR PRESSURE REGULATING SYSTEM PIPING DRAWN BY: BIFF CHECKED BY: 1.002 APPROVED BY: 4-7-82 DATE:		THIS PRINT ISSUED FOR ORDER NO. 1191-8049 AND MUST BE RETURNED WITH THE JOB PRINT INDEX DESCRIPTION AIR SUPPLY PIPING CODE 56 MATERIAL: 56 SCALE: 56 DRAWING OR PART NO. 1191-8049	
--	--	--	---	---	---	--	--	--