

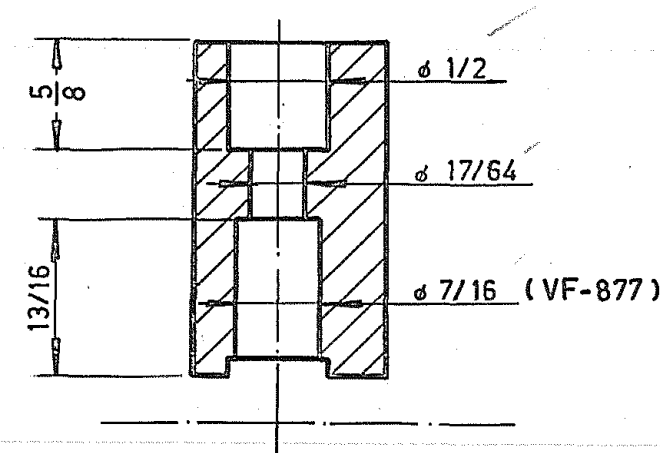


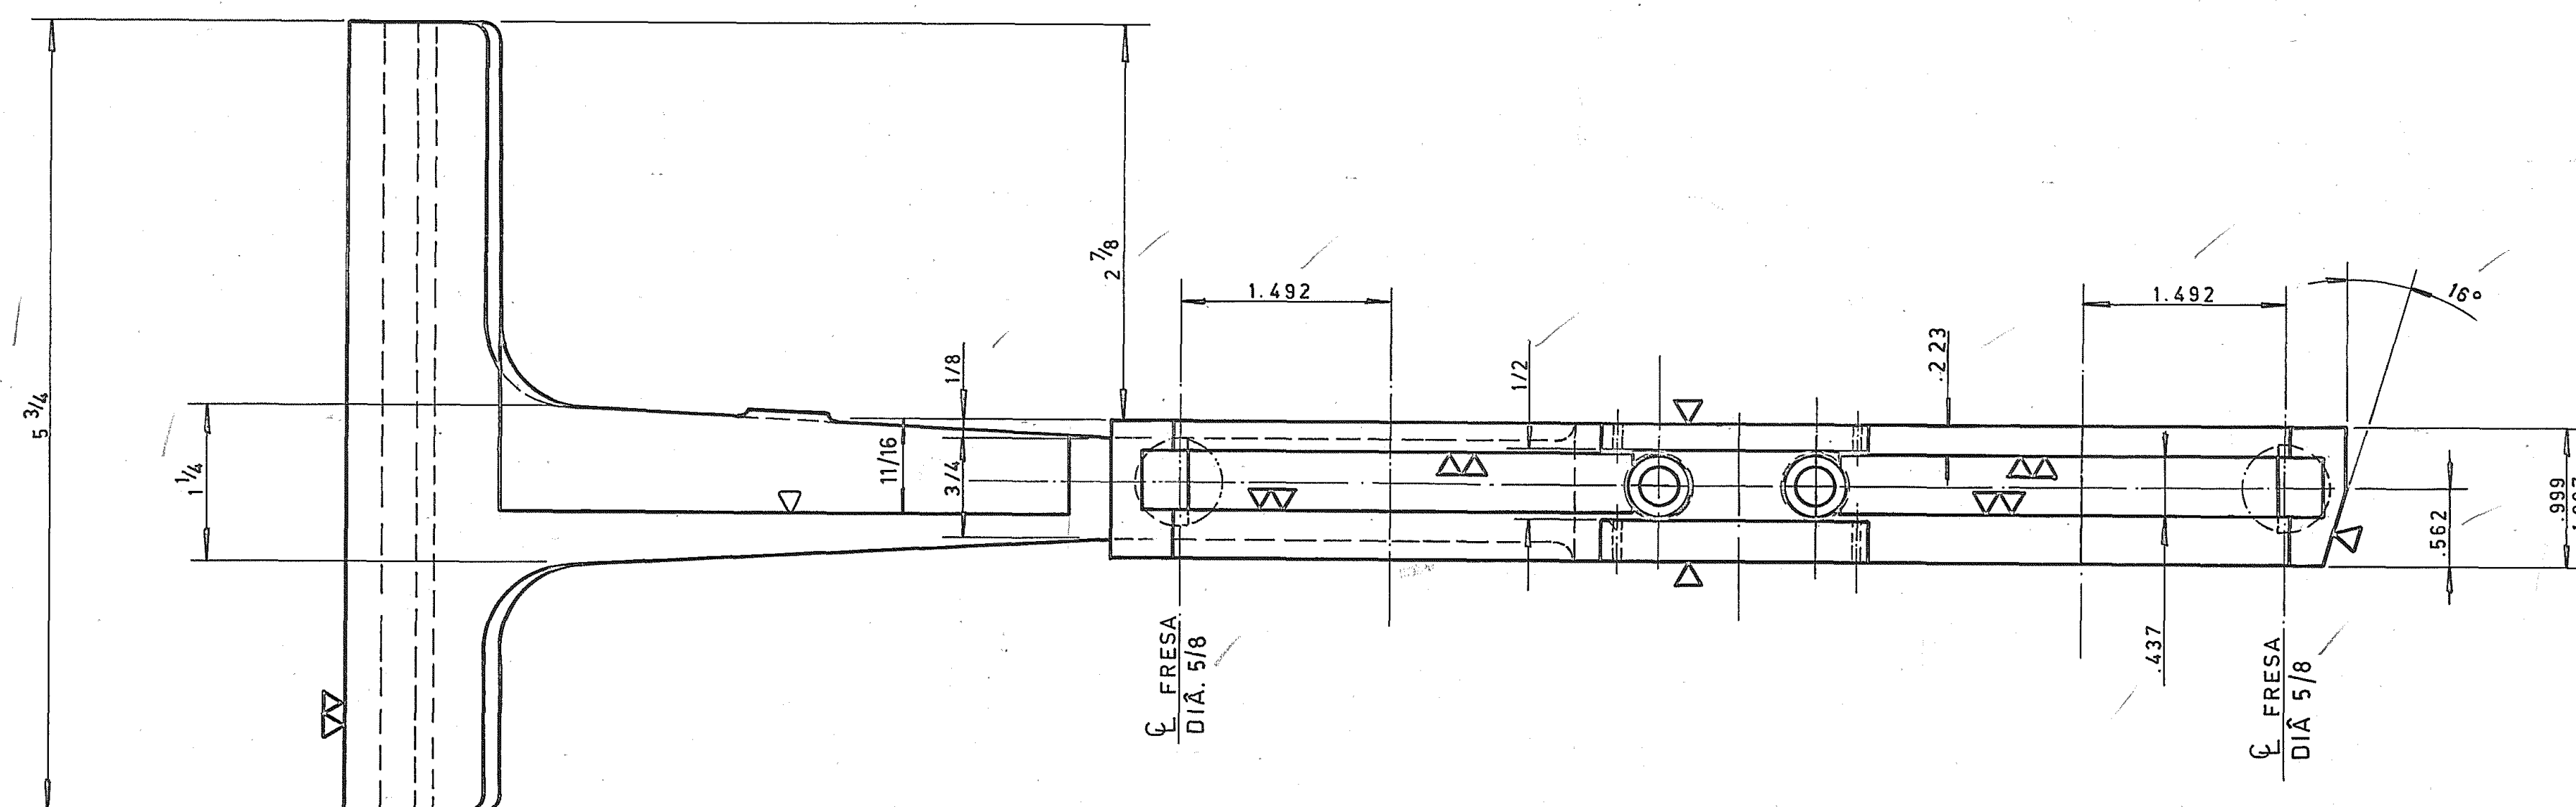

CORTE A - A

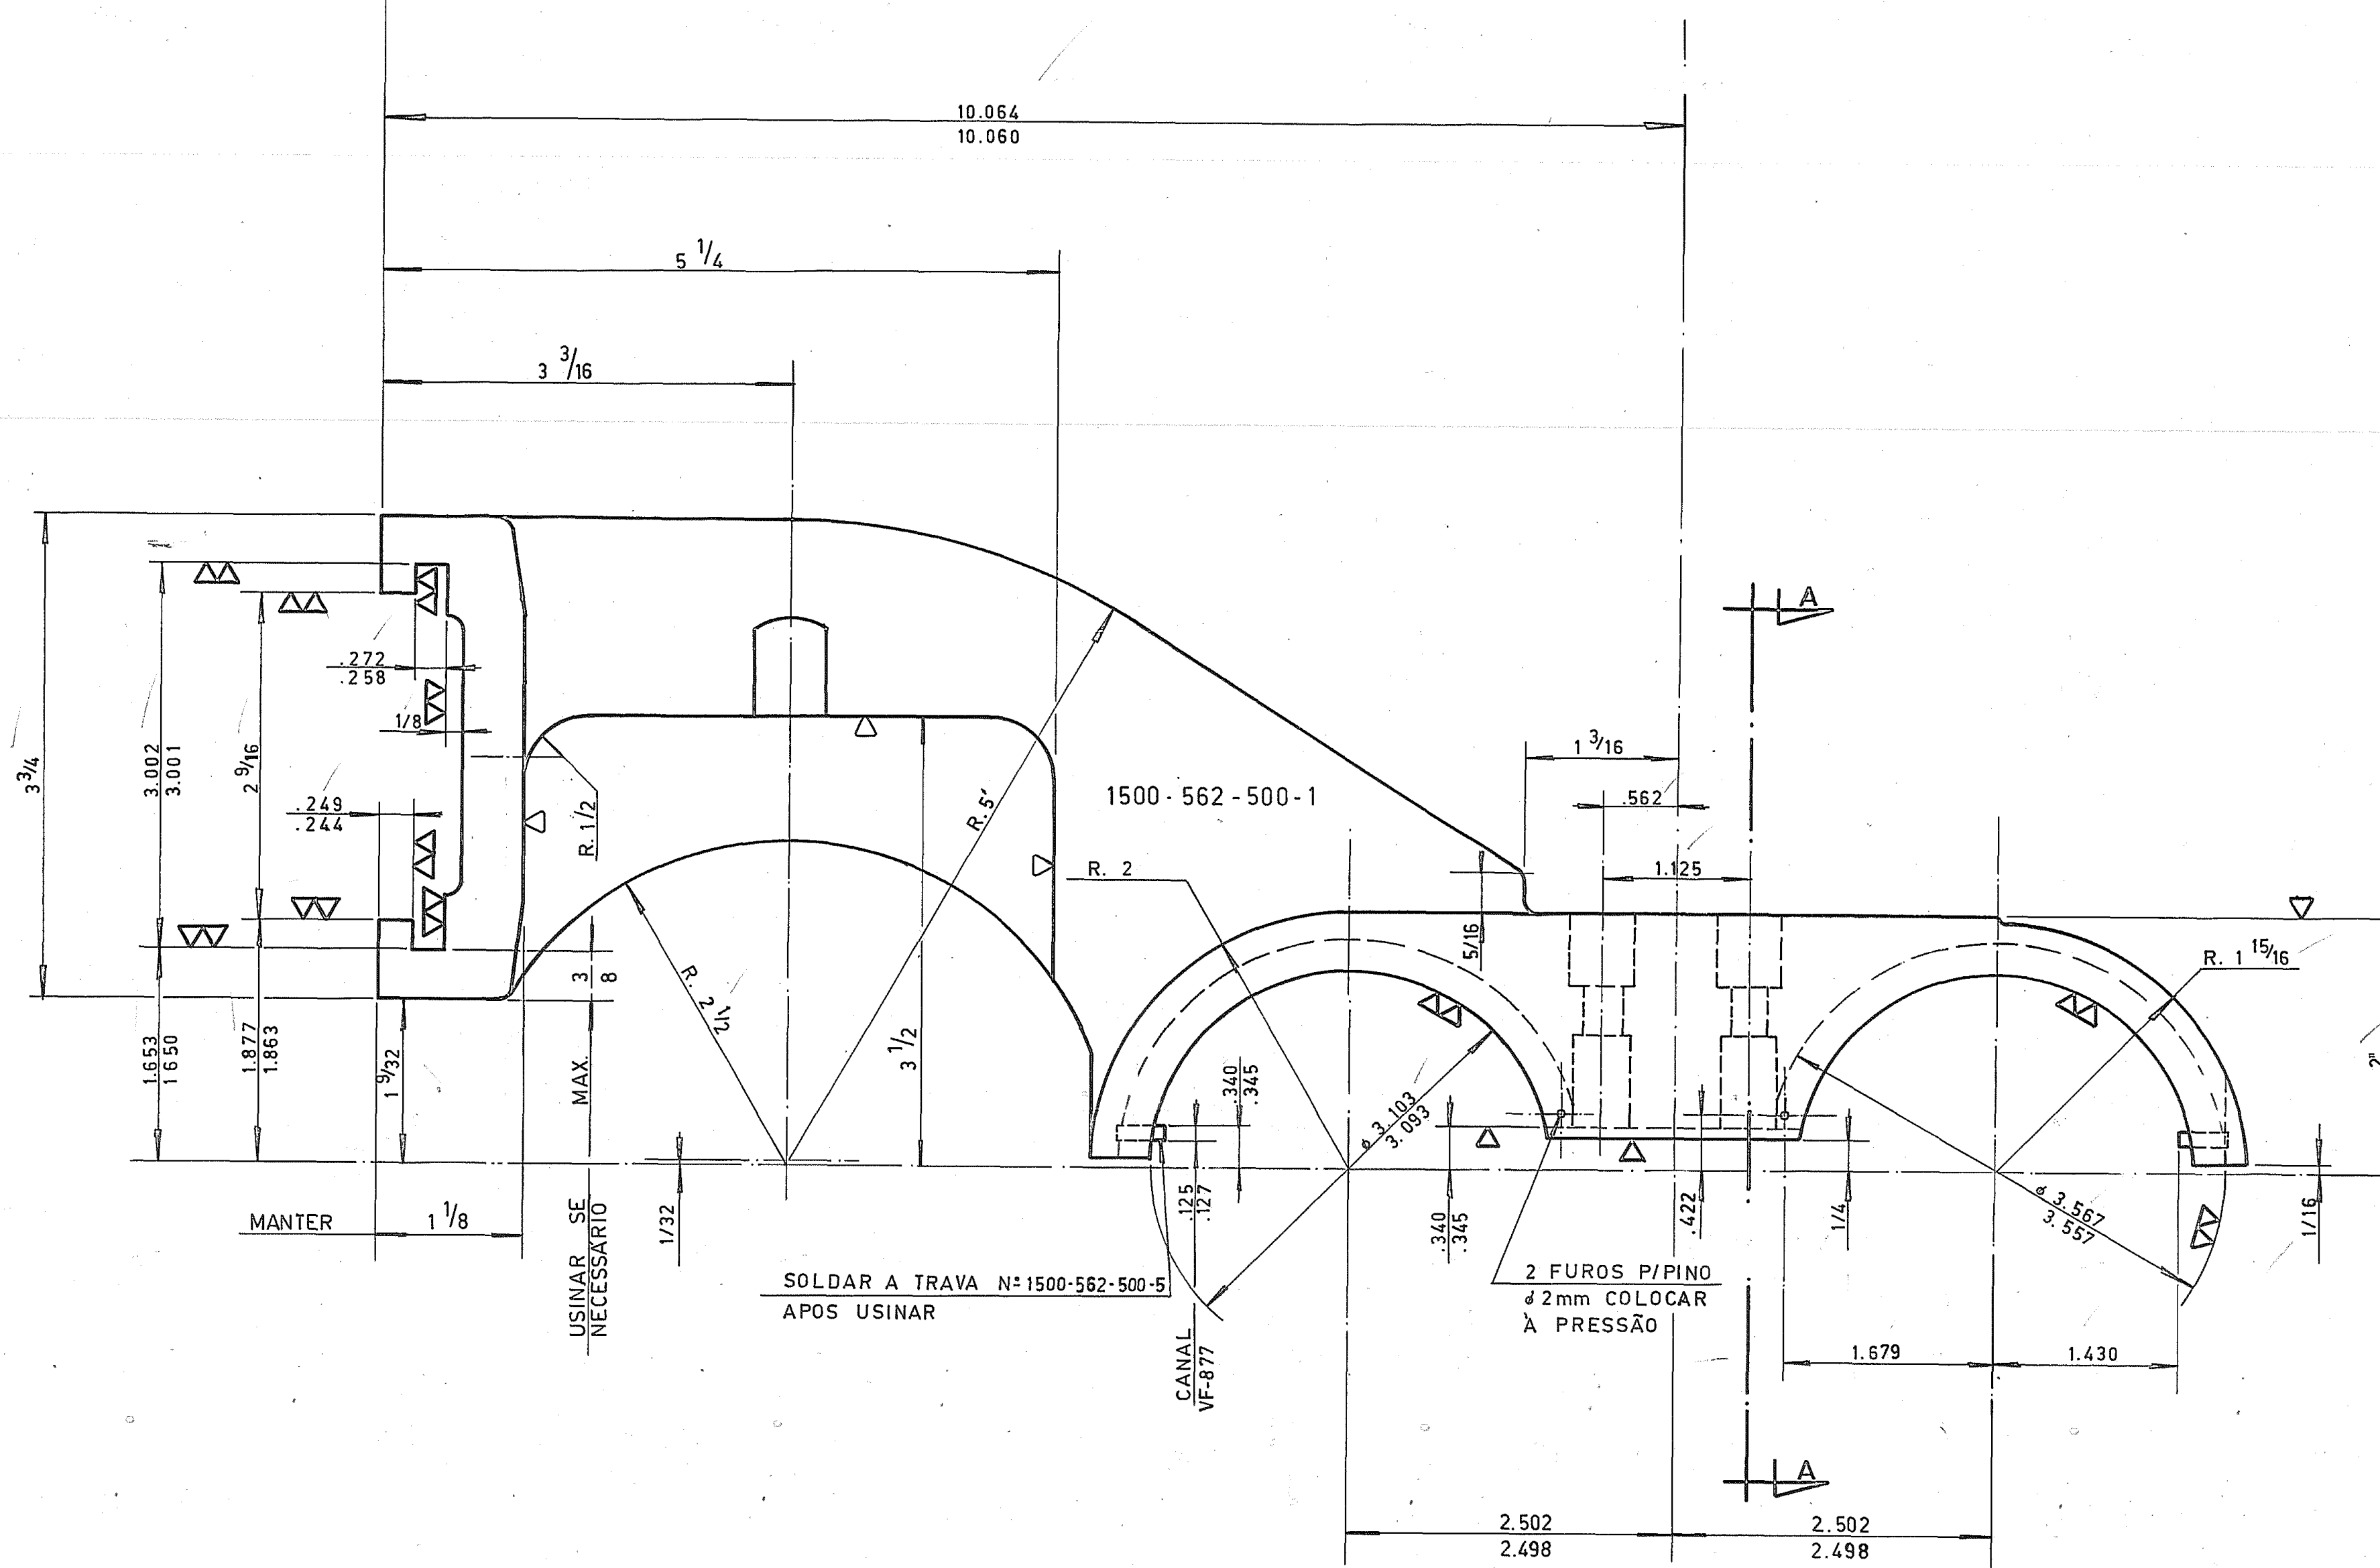

DESENHO P/ USINAGEM

OBS.: PARA MODELAÇÃO VIDE DES.
1500-562-500-1P_1500-562-500-2P

$$\underline{\sim} \quad \underline{(\nabla \quad \nabla \nabla)}$$

500 - 70 mm

DATA	USAO	VIAJERO	DATA: 18 - 01 - 85	VIDROS VITON LTDA.		DES. <i>aportado</i>
			TOLERANCIAS STANDARD PAR SUPERFICIES UNIDADES SI TOLERANCIAS INDICADAS	FERRO FUND. MODUL. 666-60	VER. <i>100</i>	
DATA	USAO	VIAJERO	DE 30 ML $\pm$ 0.03"	NECK RING HOLDER OFF-SET MAQ. IS D.6 5"CC	H. DO ACIL. VVM-25	APROX. <i>100</i>
			F=ACAO	CA	NECK RING HOLDER 70 mm LH	H. DO MA 1500 - 560 PESA - 500 - 1
DATA	USAO	VIAJERO	DE 0" AIE 8" $\pm$ 1/8"	T. AL.	L 1:1	DES.
			DE 0" AIE 24" $\pm$ 1/32"			
DATA	USAO	VIAJERO	ACIMA DE 24" $\pm$ 1/16"			