


1500-565-514-1
1500-565-514-2

USE REPAIR .IP #


Block Lock
1800-575

MATERIAL (2)
80-55-06
DUCTILE IRON
OR AISI-8620
C.R.S BURNOUT

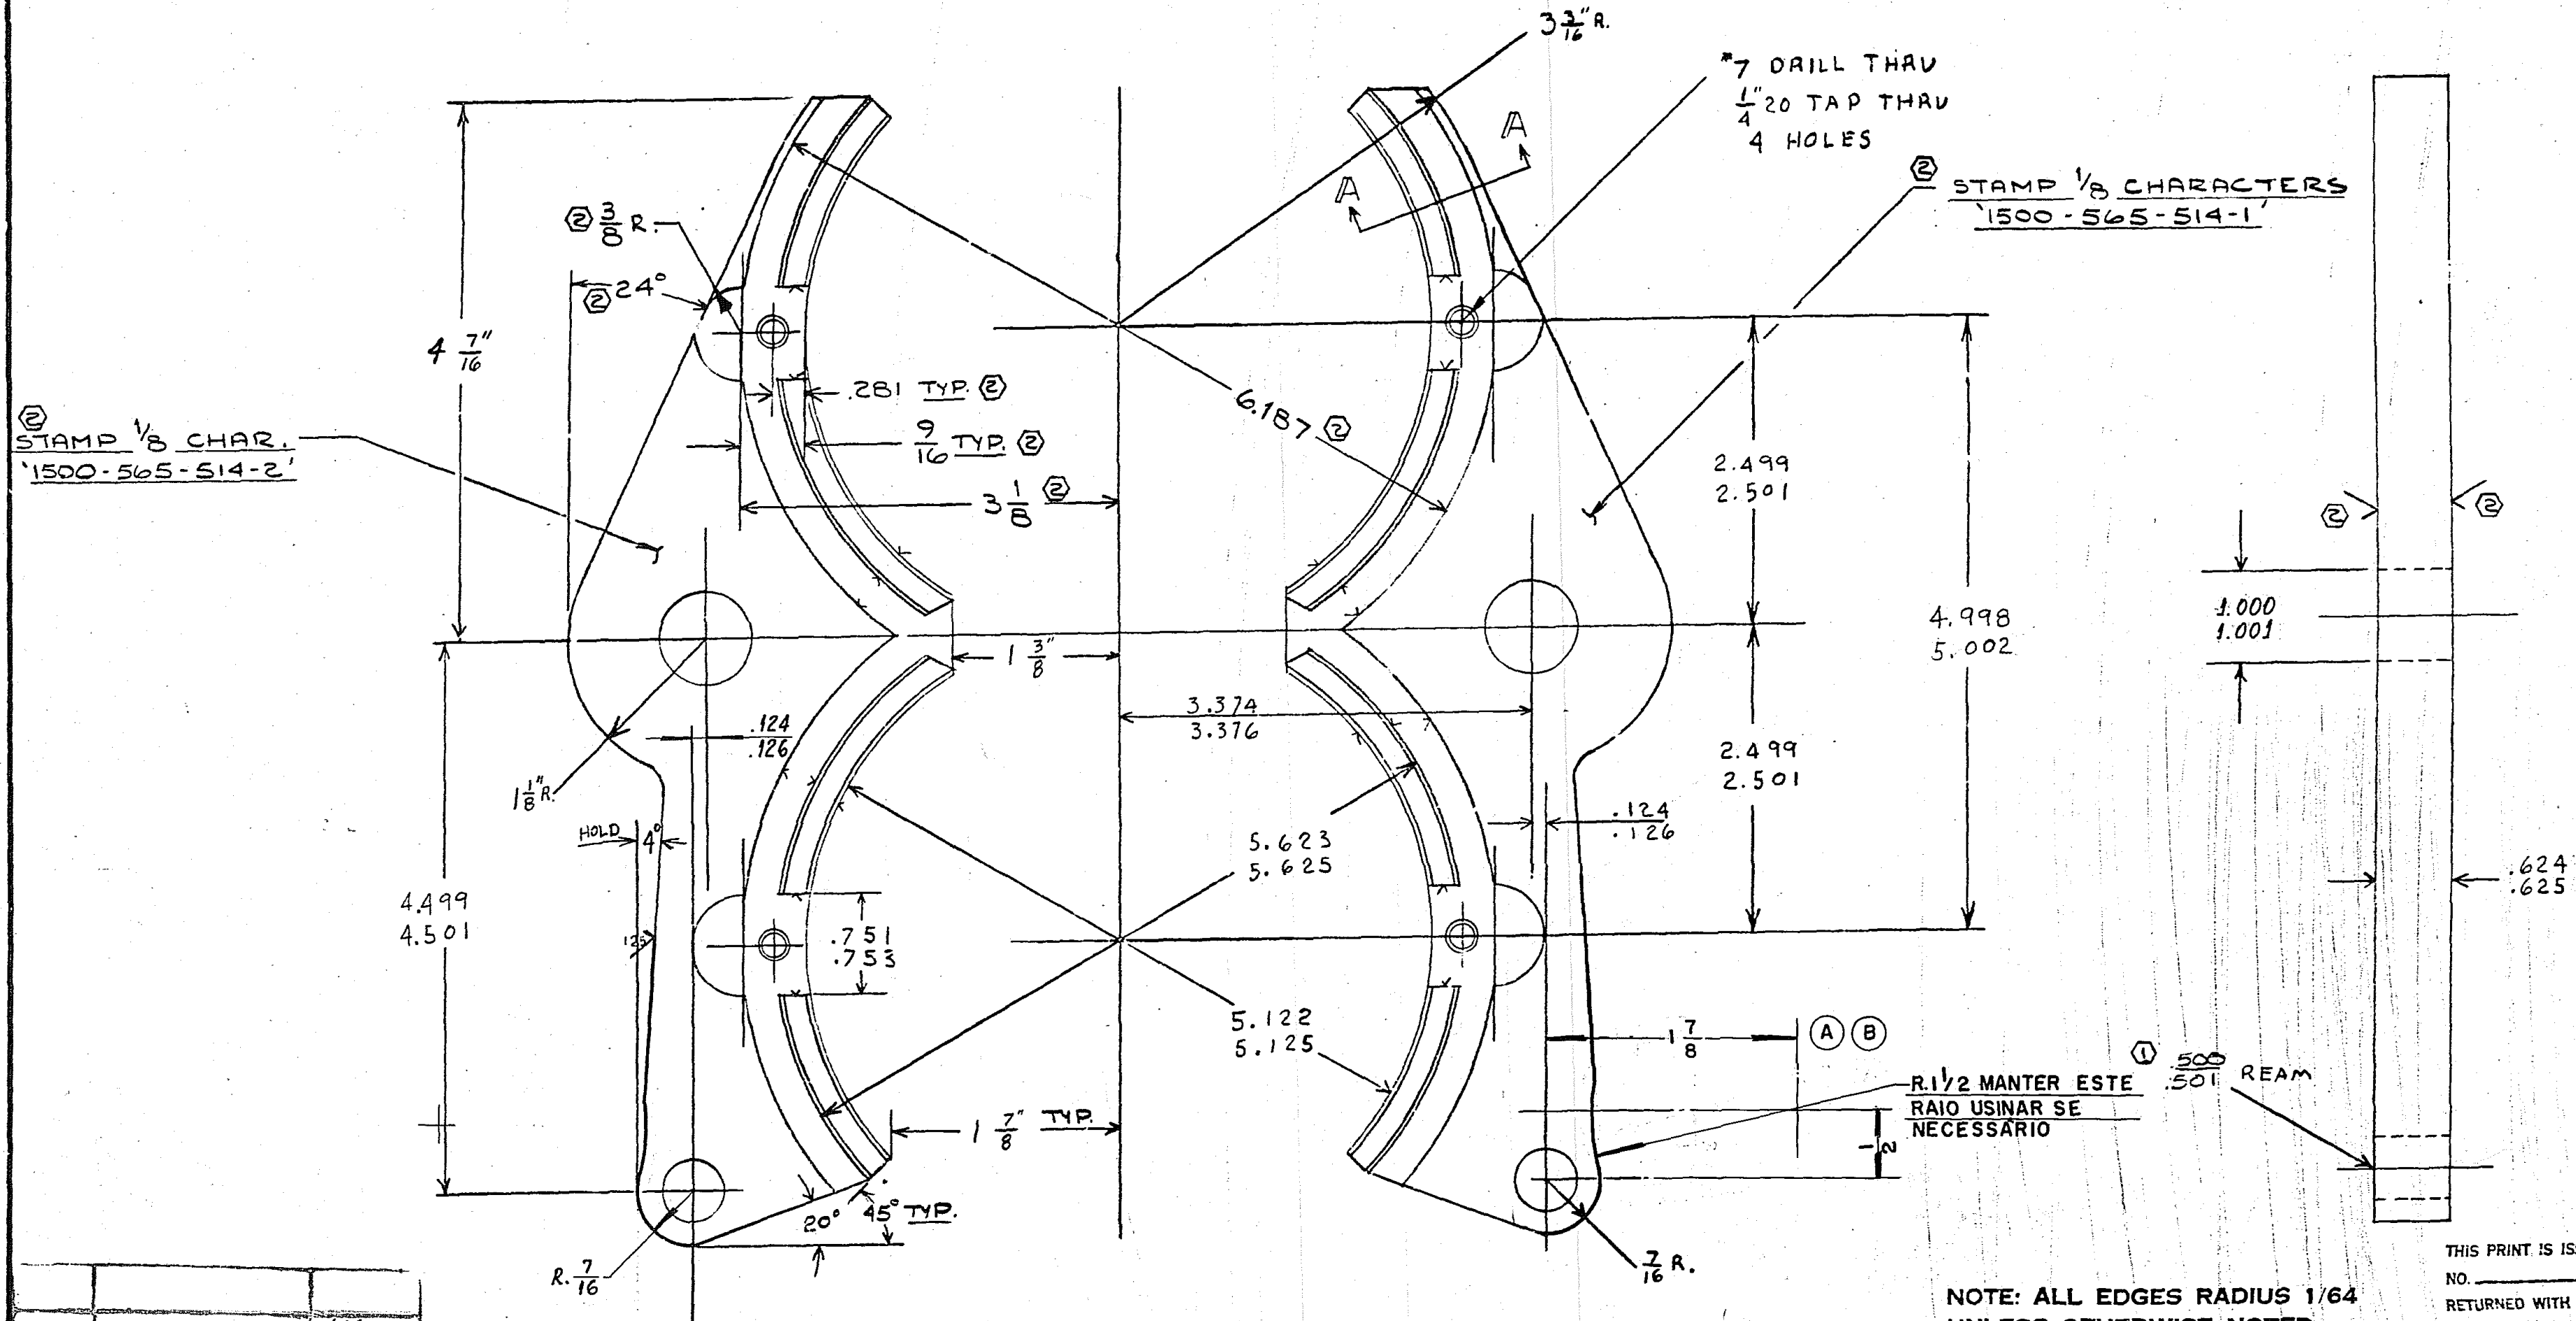

ITEM	MODIFICAÇÕES	DATA
B	ERA: R. 7/8 e 1 1/8	2. 4. 97
A	ERA: RAIO 3/4	22-8-85

NO.	DATE	C.N.
(1)	7-27-78	1160
(2)	3-5-80	2612
3		
4		
5		

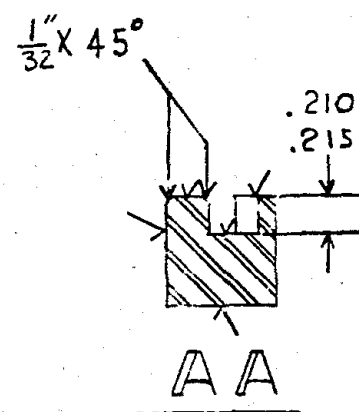

MAT: ACD SAE 1045
(USAR PEÇA CORTADA
MAC. ALT. N: VV-1646)

NOTE: ALL EDGES RADIUS 1/64
UNLESS OTHERWISE NOTED

THIS PRINT SUPERSEDES
PREVIOUSLY DATED PRINTS
THIS PART NUMBER

NOTE: ASAE FINISH
63 UNLESS NOTED

STANDARD TOLERANCES
FOR FINISH DIMENSION
NOT OTHERWISE NOTED
DECIMAL + OR - .005
FRACTIONAL
0" TO 5" + OR - .004
5" TO 24" + OR - .003
OVER 24" + OR - .002
FINISH TO ASA (A)
MFG. FINISH (B)

GLASS MACHINE, INC.
S. VINELAND, N. J.

SCALE: 1-1 APPROVED BY: DRAWN BY: W4
DATE: 4/3/74
TOP INSERT 5 1/8 Bore 5" CC
APPROVED: #27
DRAWING NUMBER: 1500-565-514-1
1500-565-514-2

THIS PRINT IS ISSUED FOR ORDER
NO. _____ AND MUST BE
RETURNED WITH THE JOB.

PART NO. TO BE ON EACH PIECE,
MAY BE ROLLED, STAMPED, OR
STENCILED.

