



JO-55-06
DUCTILE IRON
OR AISI C-8620
R.S. BURNOUT

1. SURFACE "B" MUST BE PARALLEL WITH SURFACE "C" W/IN .003 T.I.R. IN 6".
2. SURFACE "B" & SURFACE "C" MUST BE PERPENDICULAR TO .750/.751 BEAM W/IN .003 T.I.R.

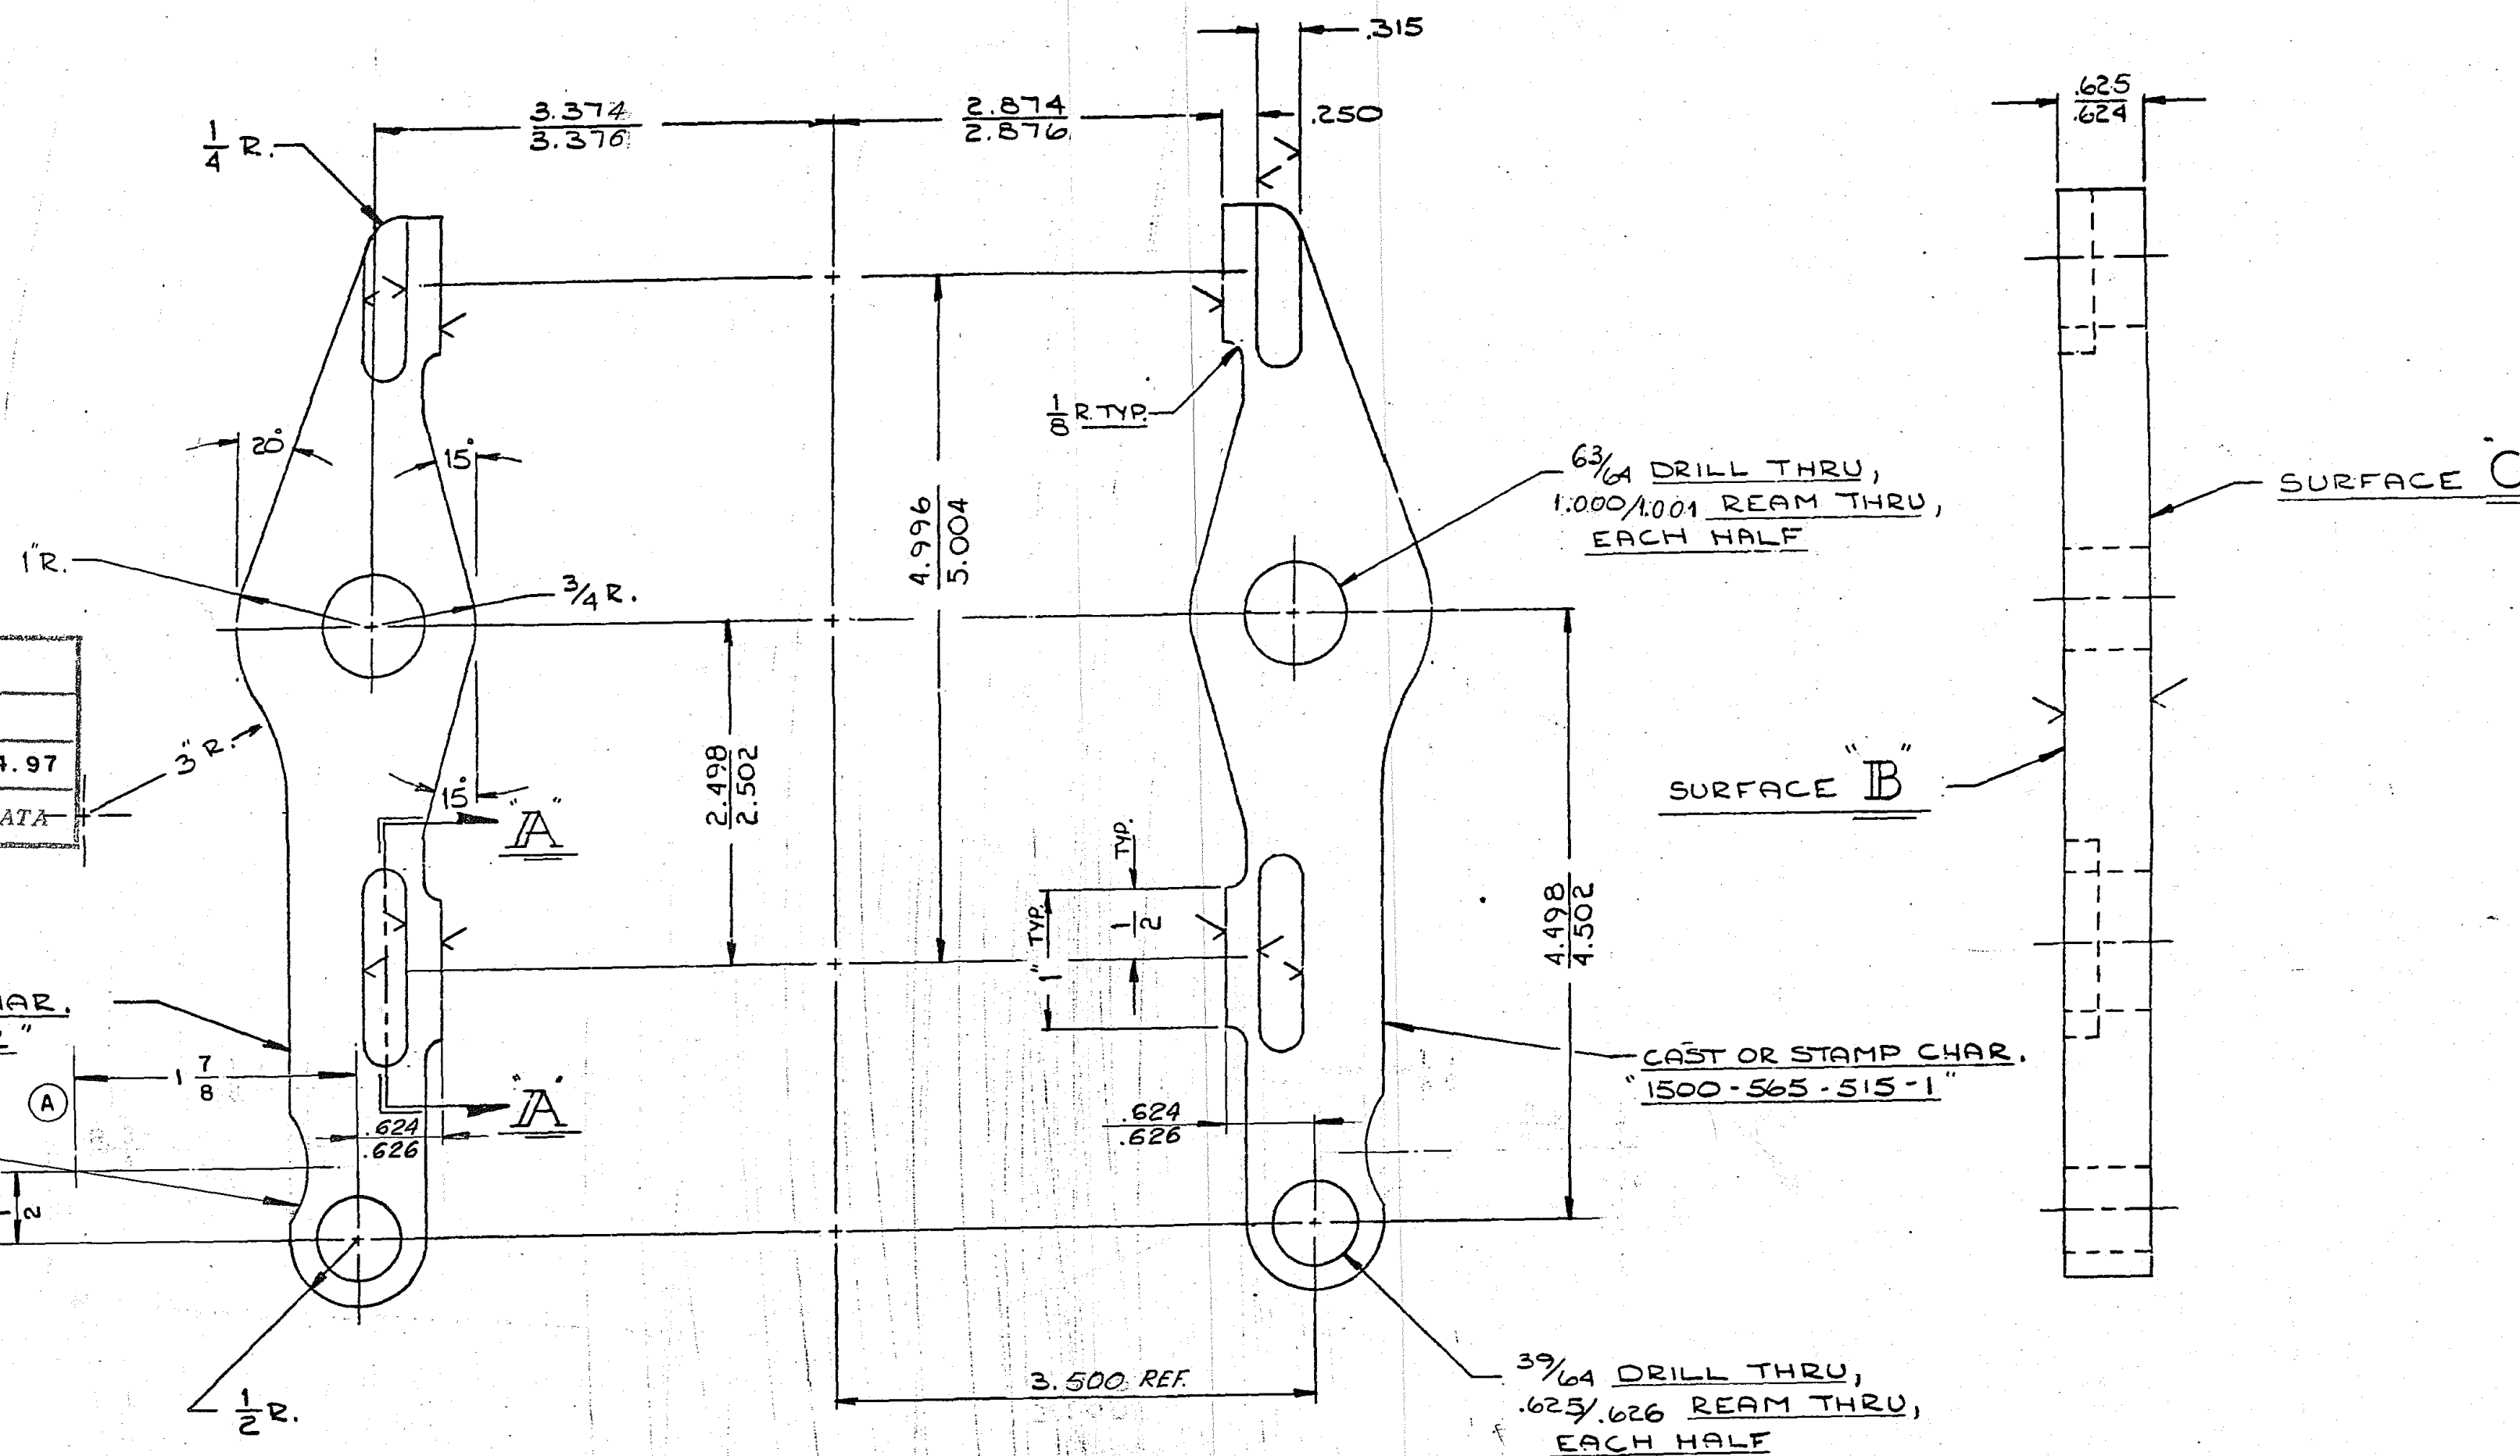

CAST OR STAMP 1/4 CHAR.
"1500-565-515-2"

R. 1/2 MANTER ESTE RAIO
USINAR SE NECESSÁRIO

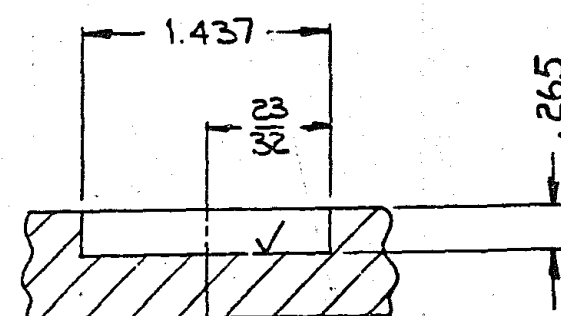

SECTION "A"-A

[illegible]