

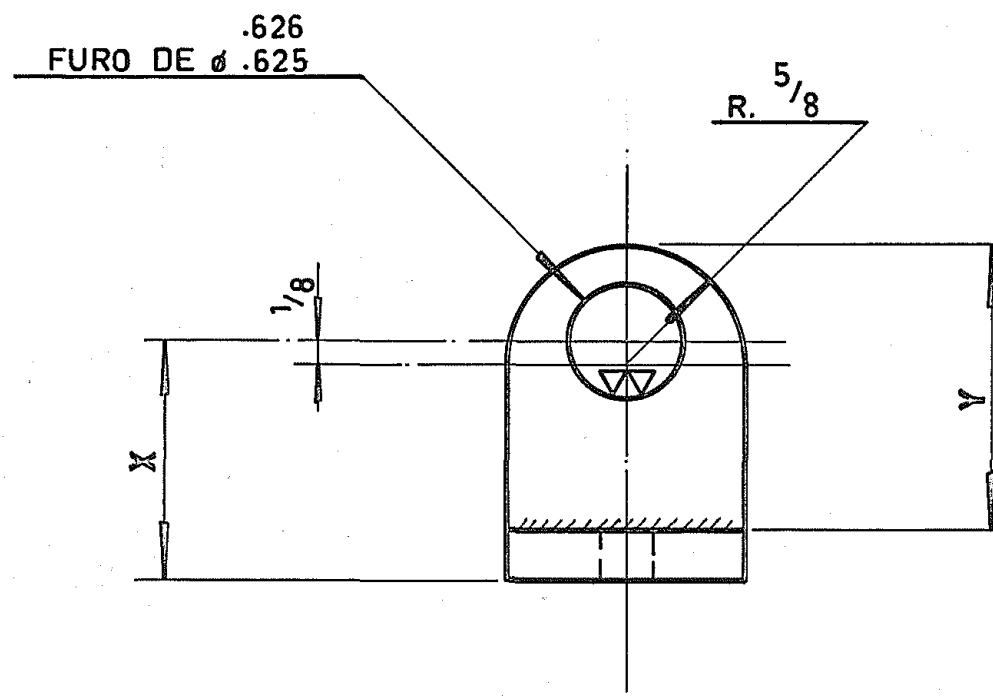
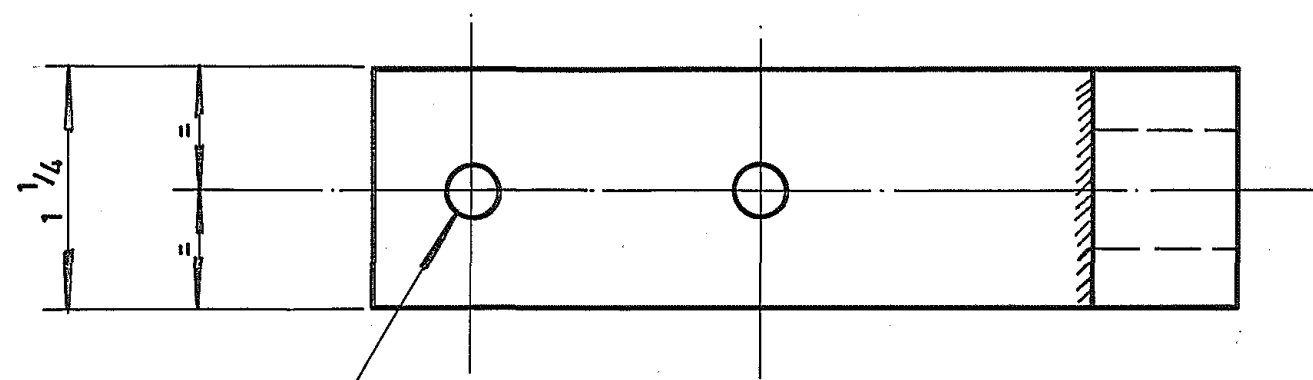


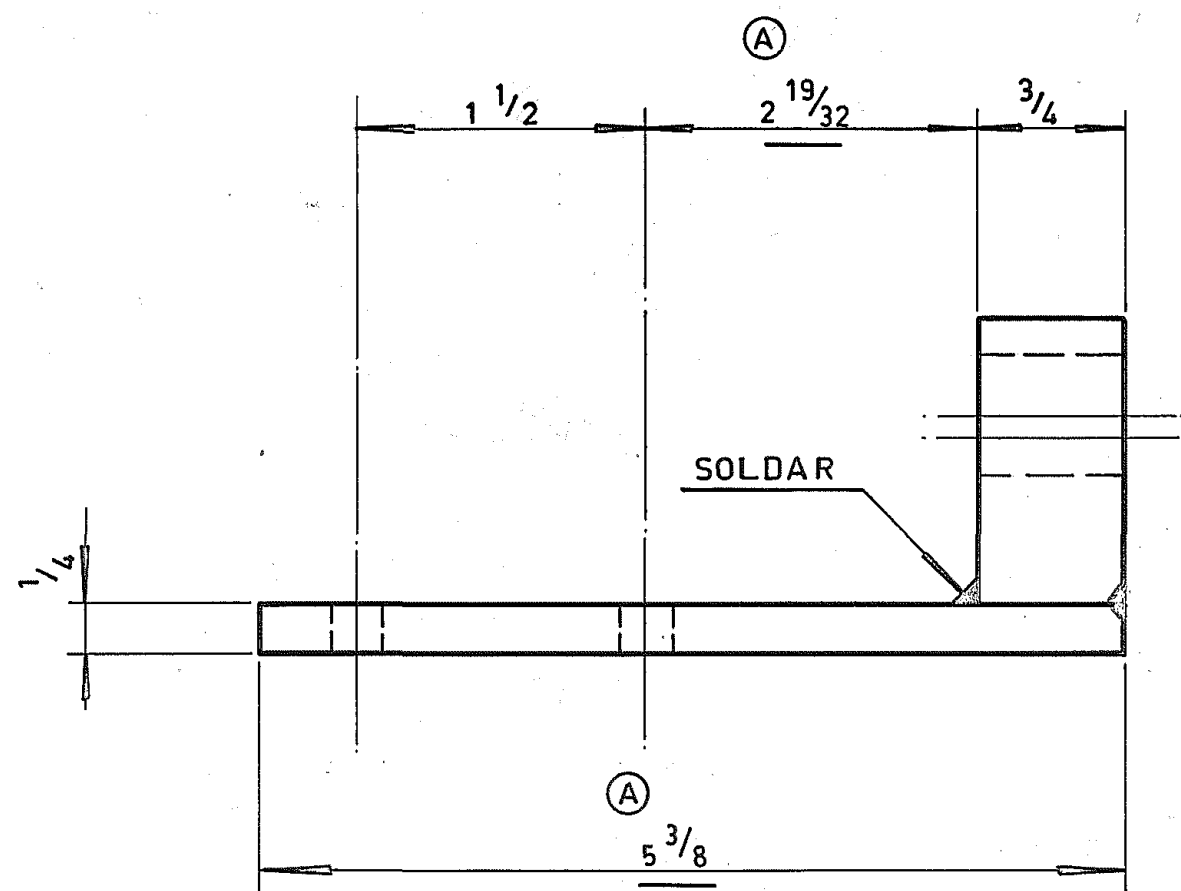

VV-2495	.625	.875
VV-2494	.687	.937
VV-2493	.750	1.000
VV-2492	.812	1.062
VV-2491	.875	1.125
VV-2490	.937	1.187
VV-2489	1.000	1.250
VV-2488	1.062	1.312
VV-2487	1.125	1.375
VV-2486	1.187	1.437
VV-2485	1.250	1.500
PEÇA Nº	DIM. X	DIM. Y



11-187-ERA 1 3/4, 1 1/2 A	DATA	08/12/86	VIDROS VITON LTDA.	DES.	Abreu
	TOLERANCIAS STANDARD PARA SUPERFICIES USINADAS SEM TOLERANCIA INDICADA			VER.	
	DECIMAL $\pm .005$ "			APROV.	
	FRAÇÃO DE 0" ATÉ 5" $\pm 1/64$ DE 5" ATÉ 24" $\pm 1/32$ ACIMA DE 24" $\pm 1/16$			N.º DO CONJ.	191-D-6646
			MAT. AÇO SAE 1020	N.º DA PEÇA	VIDE TABELA
			8 SECT IN LINE IS MACHINE		
			SUPORTE REGULÁVEL		
			TRAT. TERM.	ESCALA	
				1:1	