
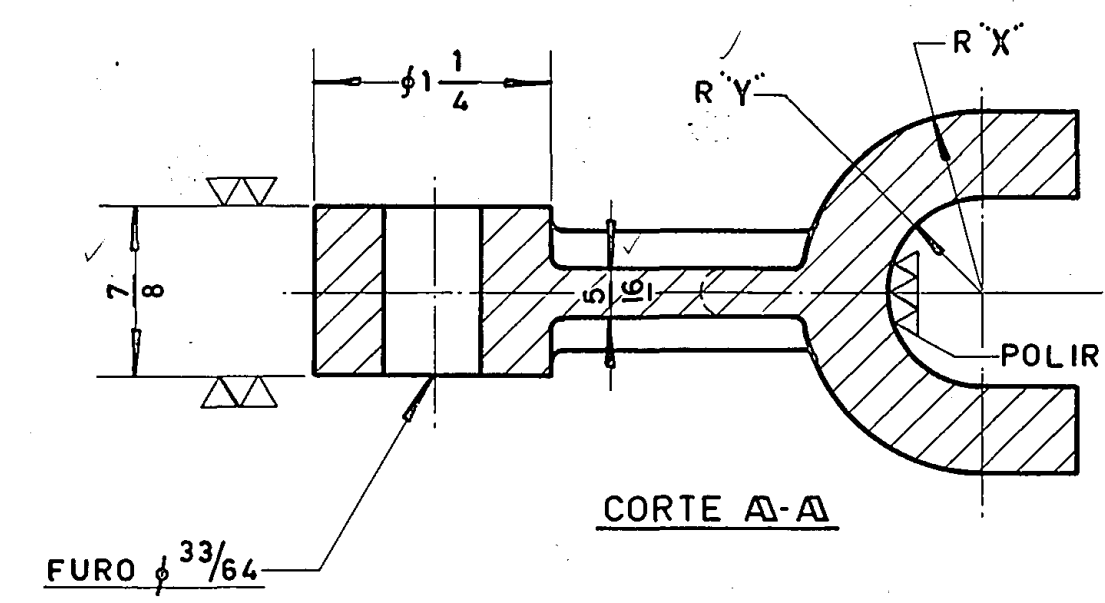


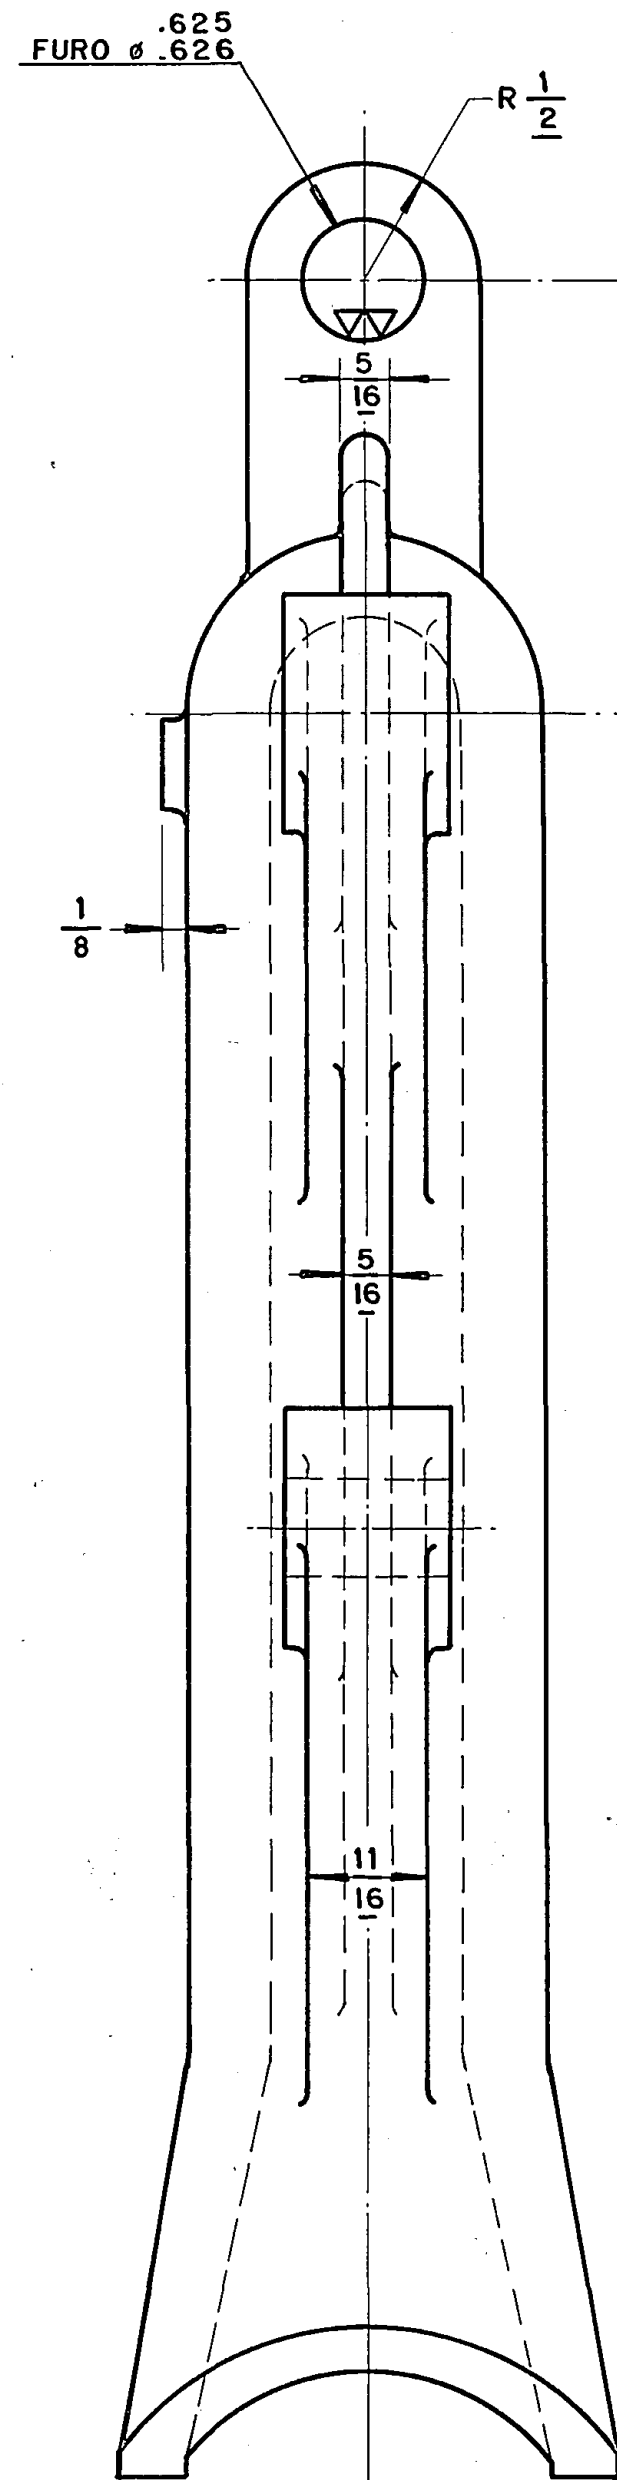


ANTES DE FURAR, ESMERILHAR ESTAS
FACES ESQUADRANDO-AS E MANTENDO
A ESP. DE 3/4

ATENÇÃO!
MANTER ESTA ORELHA COM AS DIM.
INDICADAS, CORTAR FORA AS RESTANTES

PART NO. 8 SEC. MACH. SEC. UPPER SIZE
ESTAMPAR Nº CORRESPONDENTE
C/ TIPOS DE 1/4

PEÇA Nº	DIA.	RAIO "S"	DIM. "T"	RAIO "V"	RAIO "W"	RAIO "X"	RAIO "Y"	DIM. "Z"	USAR PEÇA EM BRUTO Nº	DIM. "A"
191-15380	5/8	17 1/2	3/16	11/16	5/8	11/16	5/16	2.560	VV-3017	22 (A)
191-15381	3/4	17 1/2	3/16	3/4	11/16	3/4	3/8	2.497	VV-3016	22 (A)
191-15383	7/8	17 1/2	3/16	3/4	3/4	3/4	7/16	2.435	VV-3015	22 (A)
191-15384	1"	17 1/2	3/16	3/4	5/8	3/4	1/2	2.372	VV-3009	22 (A)
191-15385	1 1/8	17 1/2	3/16	15/16	7/8	15/16	9/16	2.310	VV-3008	22 (A)
191-15386	1 1/4	17 1/2	3/16	15/16	15/16	15/16	5/8	2.247	VV-3007	22 (A)
191-15387	1 3/8	17 1/2	3/16	15/16	1"	15/16	11/16	2.185	VV-3006	22 (A)
191-15388	1 1/2	17 1/2	3/16	1 1/16	1 1/16	1 1/16	3/4	2.122	VV-3005	21
191-15389	1 5/8	17 1/2	3/16	1 1/16	1 1/8	1 1/16	13/16	2.060	VV-3004	21
191-15390	1 3/4	17 1/2	3/16	1 1/4	1 3/16	1 1/4	7/8	1.997	VV-3003	21
191-15391	1 7/8	17 1/2	3/16	1 1/4	1 1/4	1 1/4	15/16	1.935	VV-3002	21
191-15703	2"	17 1/2	3/16	1 1/4	1 5/16	1 1/4	1"	1.869	VV-5193	21

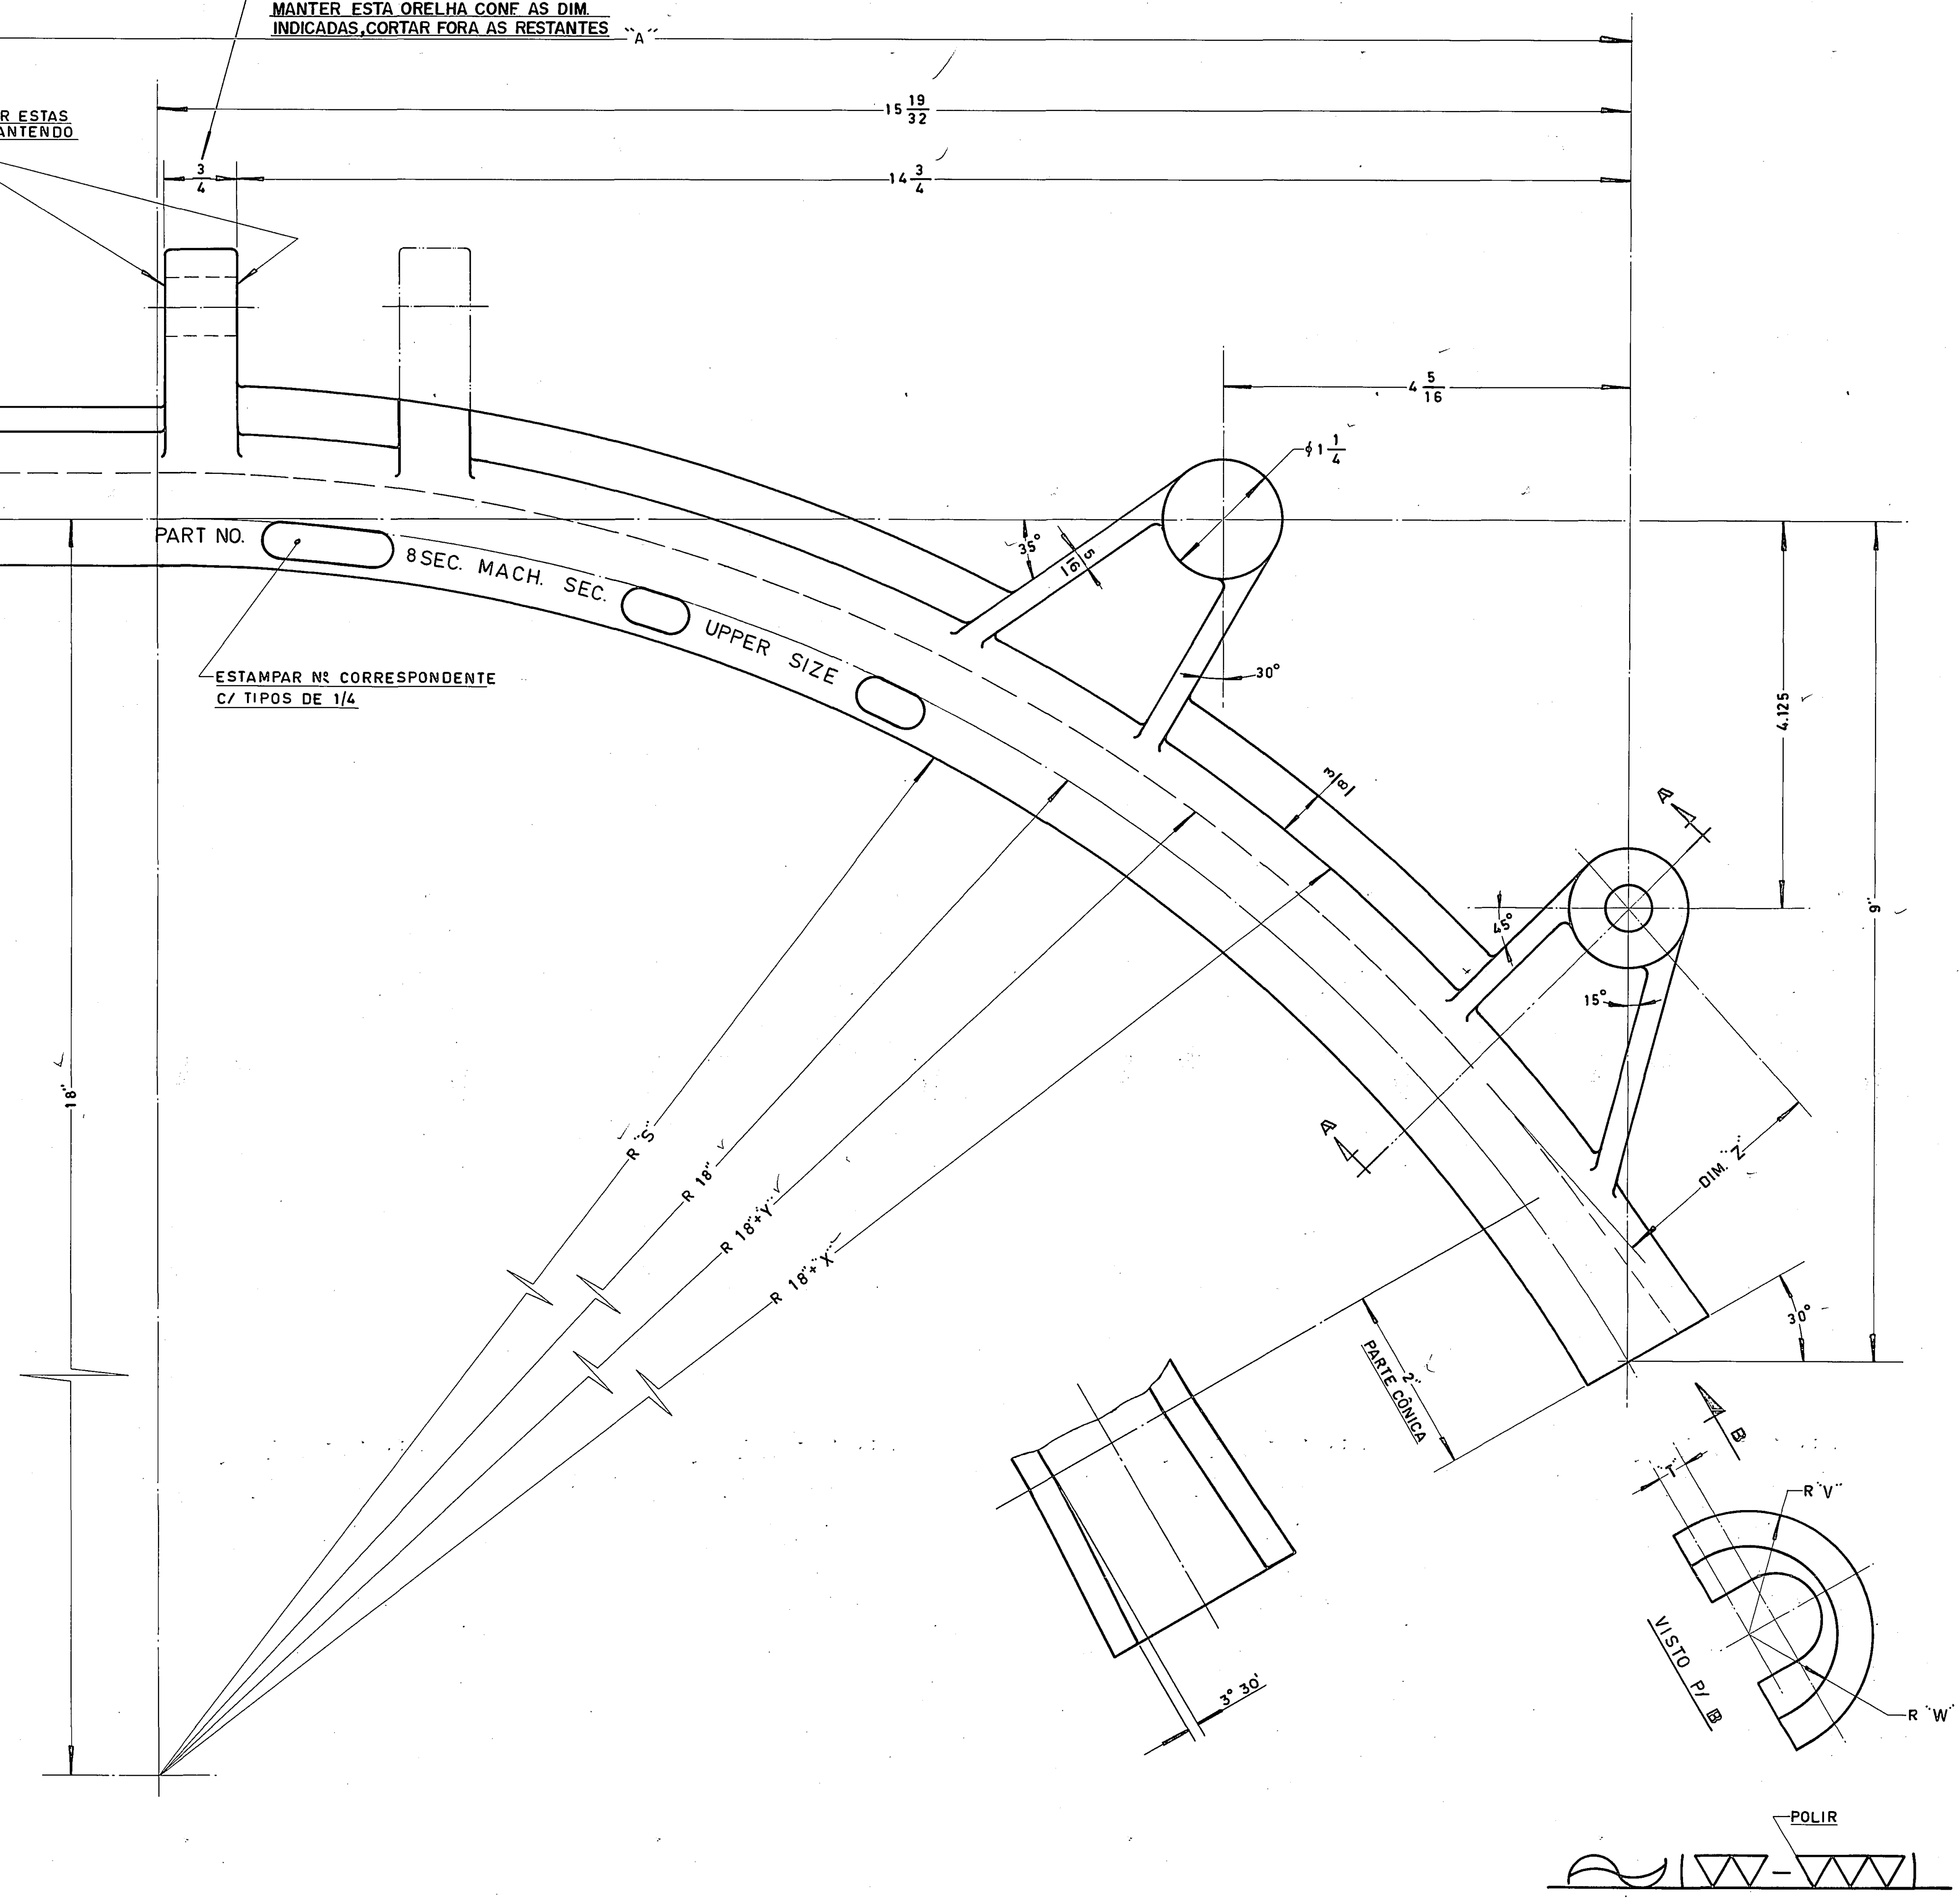

DES. 191-6613 DATA 11-11-81 REVISÃO 21 DATA 01-03-88	TOLERÂNCIAS STANDARD PARA SUPERFÍCIES USINADAS SEM TOLERÂNCIA INDICADA DE 0" AIE 9" ± 1/64 DE 9" AIE 24" ± 1/32 ACIMA DE 24" ± 1/16	VIDROS VITON LTDA. MAT. FERRO FUNDIDO CINZENTO M-DELIVERY EQUIPMENT D.G. 8 SECT IN LINE I.S. MACHINE DEFLECTOR - UPPER SECT. 1 & 8	DES. 191-6613 N.º DE 191-6613 N.º DO 191-6613 DES. 191-6613
	DIMENSÃO EM T. AT. 1:1	N.º DE 191-6613 N.º DO 191-6613	N.º DO 191-6613
	FOLHA 3	(L)	(L)
	(L)	(L)	(L)