



2 FUROS $\phi \frac{11}{32}$ C/ ROSCA $\frac{1}{8}$ NPT

$\frac{1}{16} \times \frac{9}{16}$

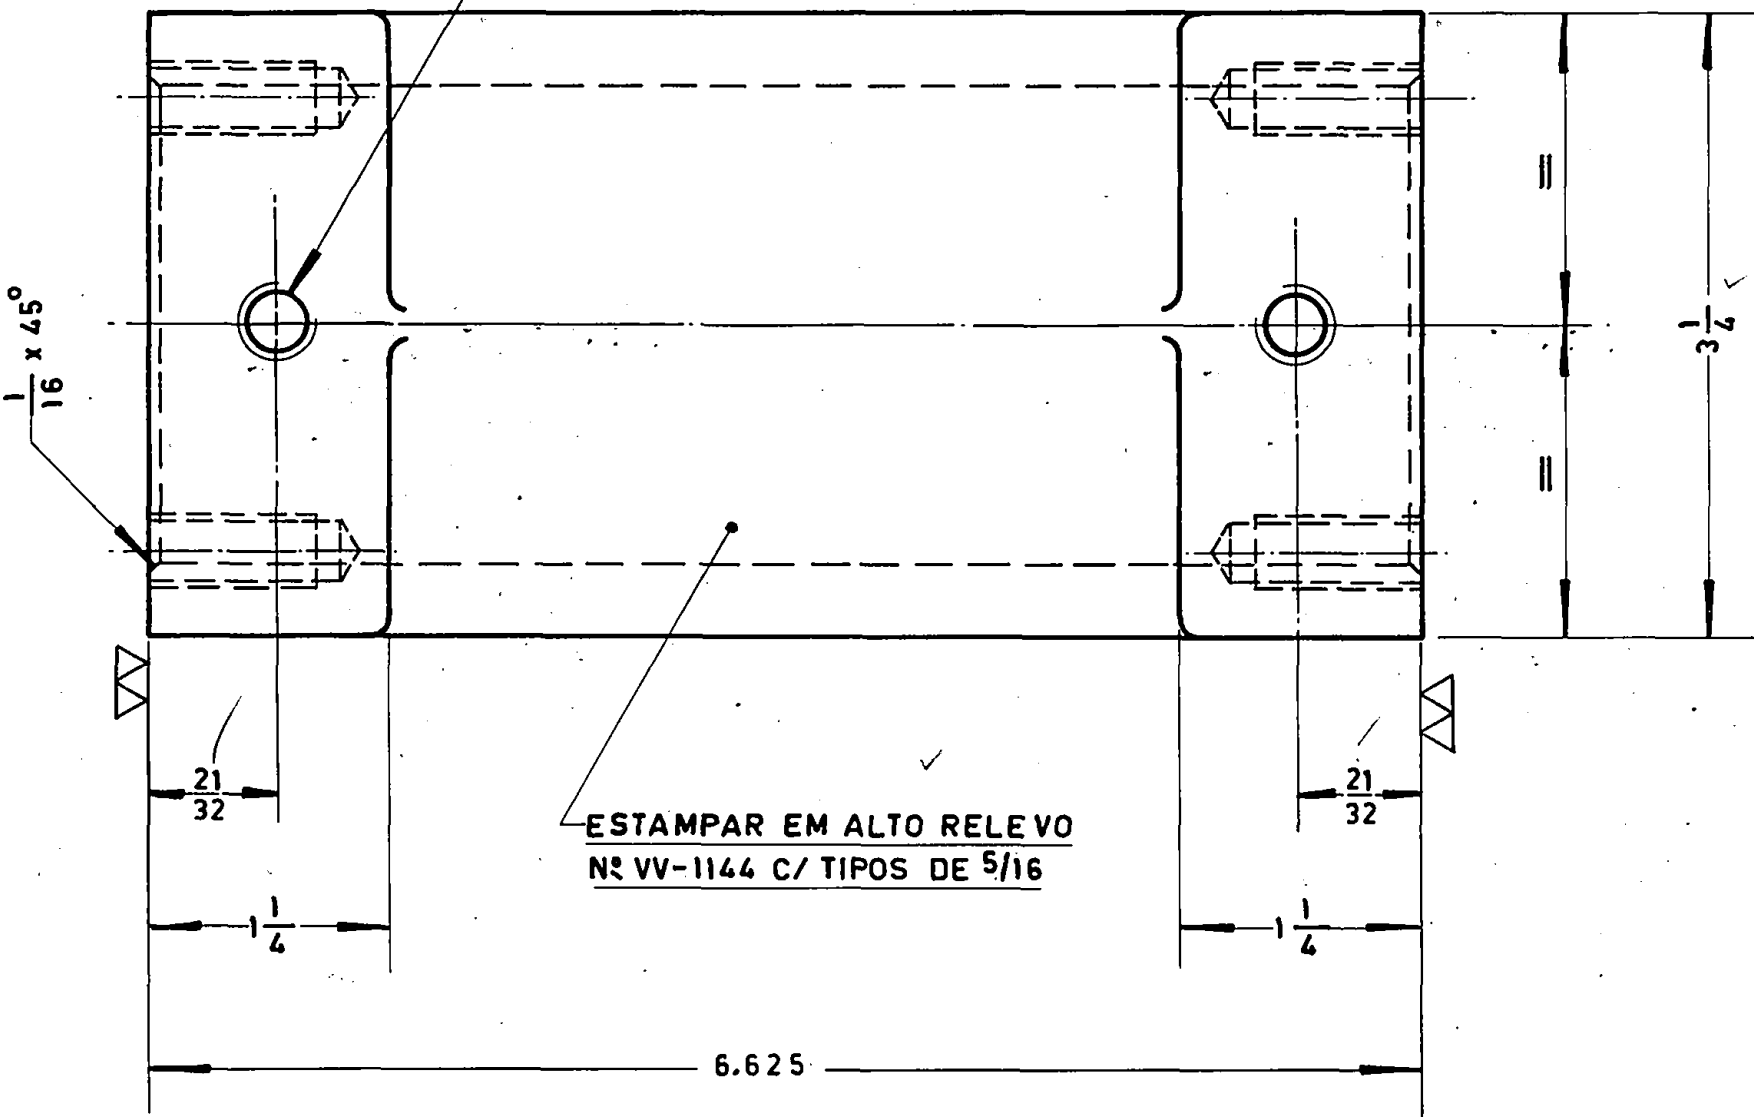


8 FUROS $\phi \frac{5}{16}$ C/ ROSCA
 $\frac{3}{8}$ NC x $\frac{7}{8}$ PROF - USAR VD-2034

$2\frac{3}{8}$

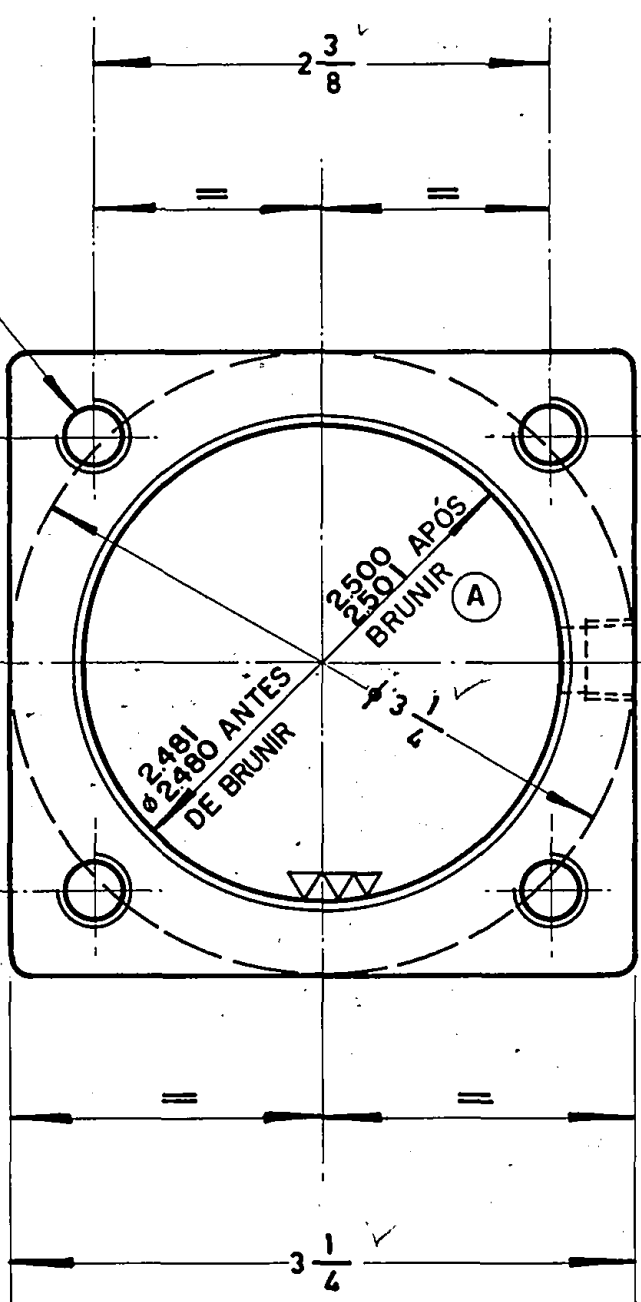

ESTAMPAR EM ALTO RELEVO
 Nº VV-1144 C/ TIPOS DE $\frac{5}{16}$

6.625

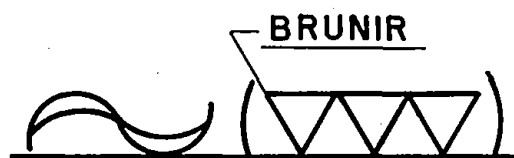

REF 1523-5054

ACRESC.	A	ITEM	DATA: 25-6-81	VIDROS VITON LTDA.	DES. <i>Paulo K. 10</i>
			TOLERANCIAS STANDARD PARA SUPERFICIES USINADAS SEM TOLERANCIA INDICADA		VER. <i>[Signature]</i>
9.695	BRUNIR	ITEM	DECIMAL ± 0.05	MAT. FUNDIDO GG-20	VVM-193
			FRACAO	RETRACTING CYLINDER	
9.695	BRUNIR	ITEM	DE 0" ATÉ 5" $\pm 1/64$	MAQ. I.S.	VVM-1144
			DE 5" ATÉ 24" $\pm 1/32$	CYLINDER	
9.695	BRUNIR	ITEM	ACIMA DE 24" $\pm 1/16$	TRAT. TERM.	N.º DO DES.
				ESCALA 1:1	