

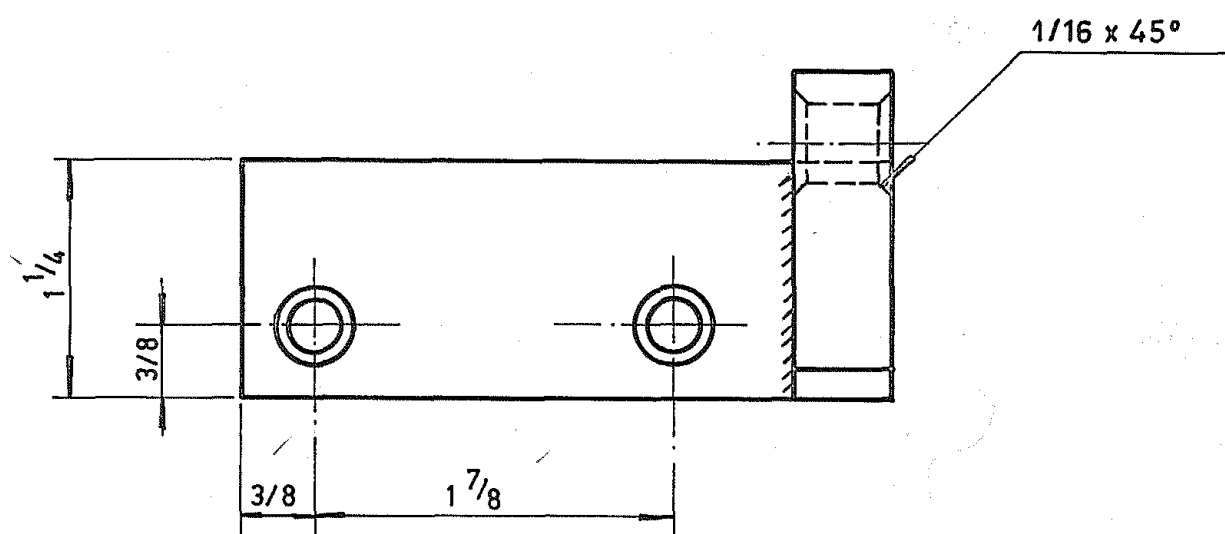


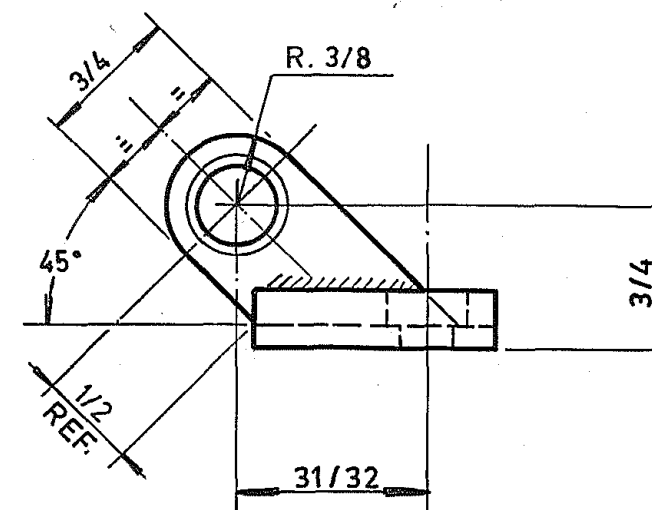

—	SEÇ. 8
SEÇ. 6	SEÇ. 7
SEÇ. 5	SEÇ. 6
SEÇ. 4	SEÇ. 5
MAQ. 6 SEÇ.	MAQ. 8 SEÇ.

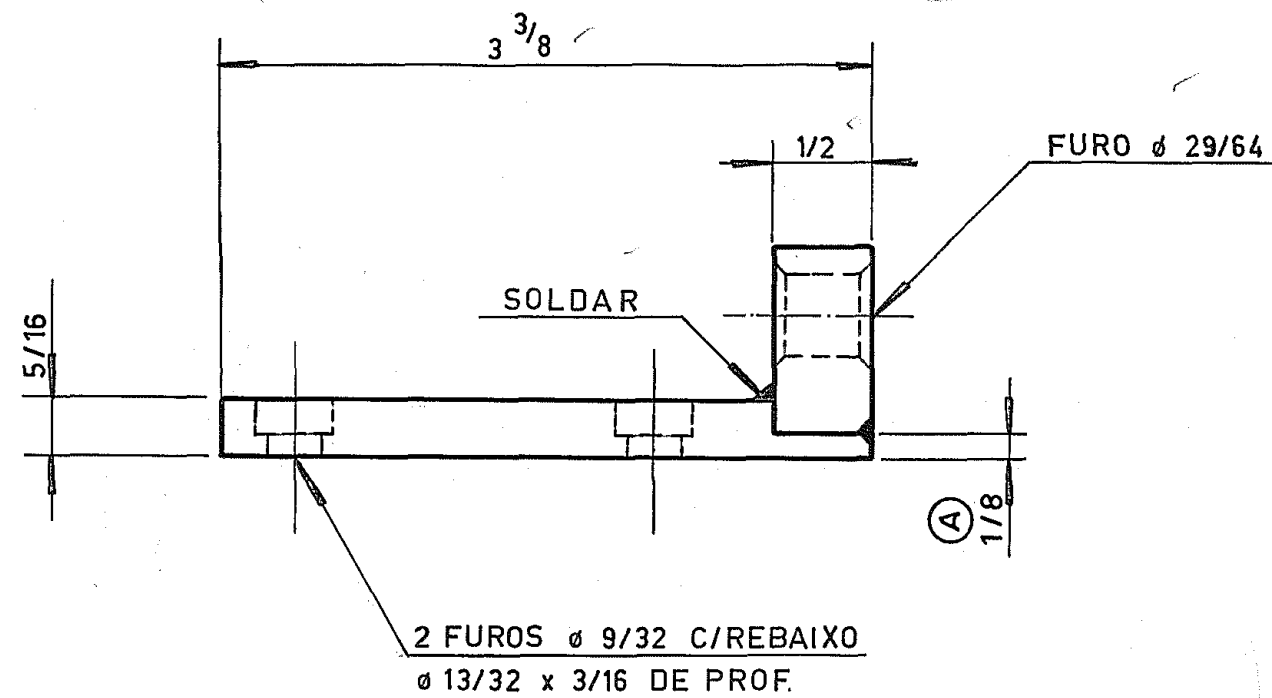

2-88 4-2-88 ERA 3/16 A	DATA	REVISAO	ITEM	DATA 23-06-86	VIDROS VITON LTDA.	DES. <i>Julio Rod</i>
				TOLERANCIAS STANDARD PARA SUPERFICIES USINADAS SEM TOLERANCIA INDICADA	MAT. AÇO SAE 1020	VER. <i>Mig</i>
				DECIMAL $\pm$ 0.05"	DELIVERY SYSTEM	APROV. <i>Mig</i>
				FRAÇÃO DE 0" ATÉ 6" $\pm$ 1/64 DE 6" ATÉ 24" $\pm$ 1/32 ACIMA DE 24" $\pm$ 1/16	MAQ. IS. 6 SEÇ. & MAQ. IS. 8 SEÇ.	N.º DI CONJ. VVM-366
					LOWER DEFL. MOUNT RH.	N.º DA PEÇA VV-2350
					TRAT. TERM.	N.º DO DES.
					ESCALA 1:1	