
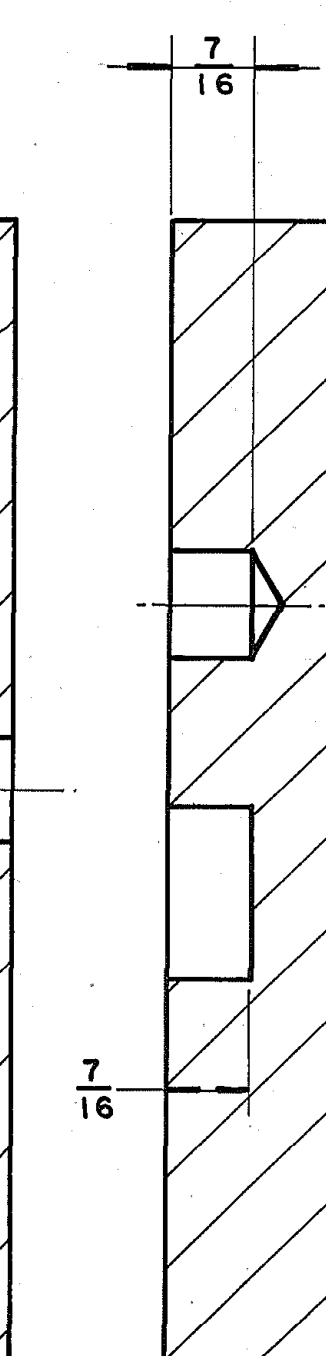
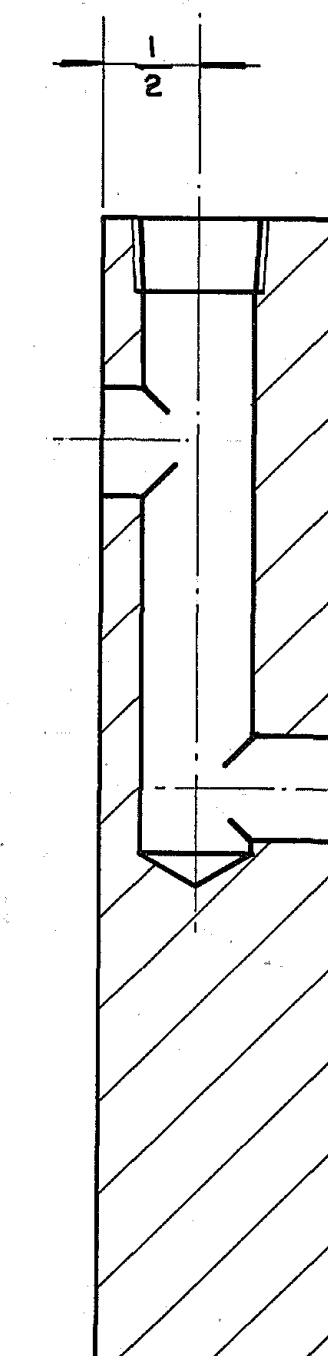
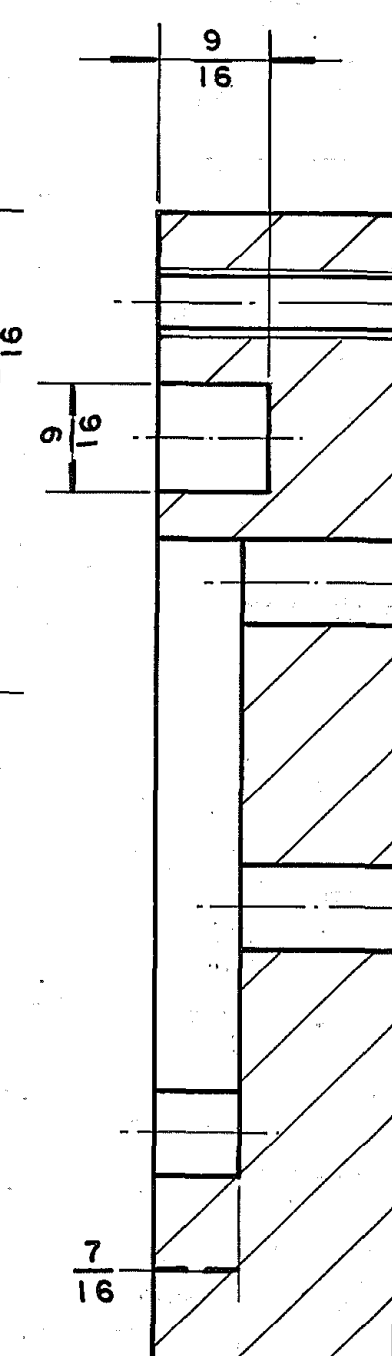
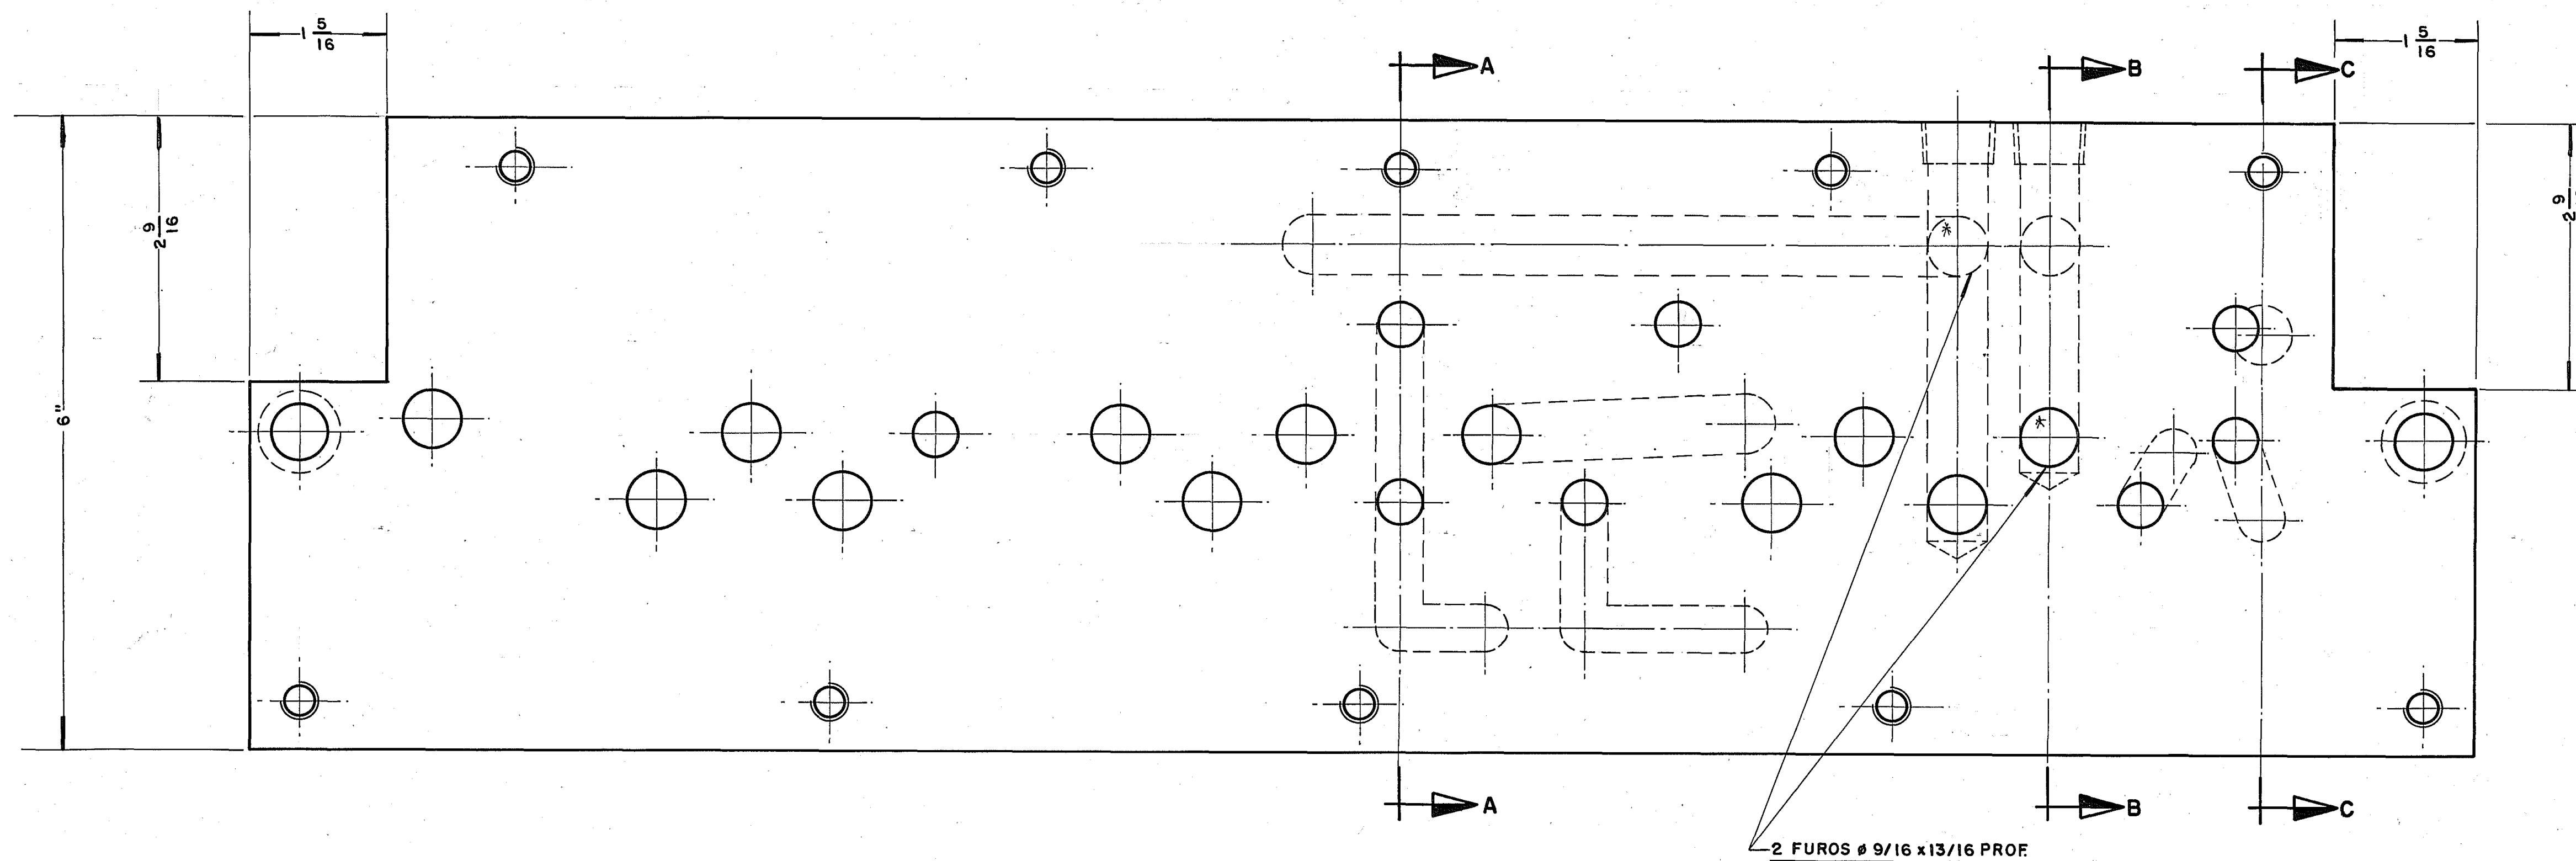


FURO ϕ 9/16 x 3/4 PROF

10 Furos ϕ 5/16 C/ ROSCA 3/8 NC

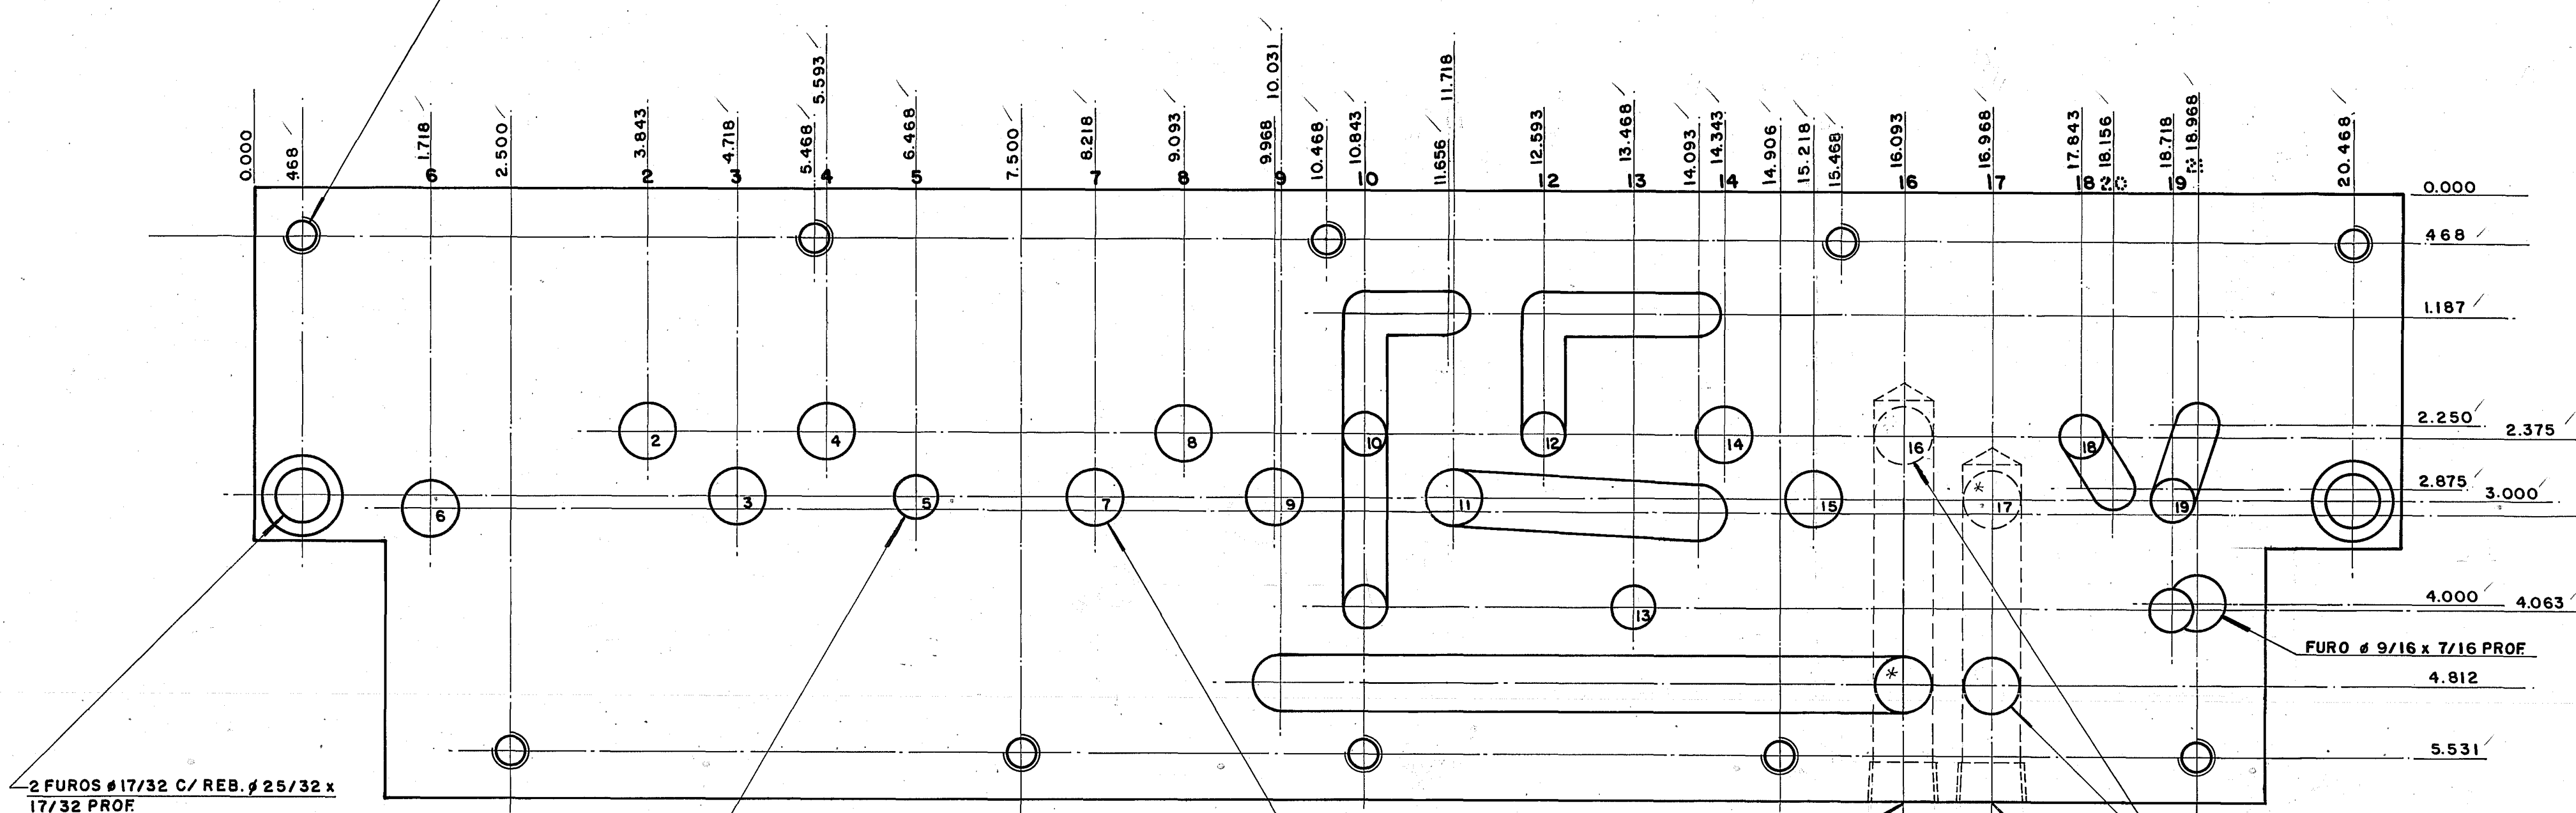

2 Furos ϕ 17/32 C/ REB. ϕ 25/32 x 17/32 PROF

8 Furos Passantes ϕ 7/16


10 Furos Passantes ϕ 9/16

FURO ϕ 37/64 x 3 31/32 PROF C/ ROSCA 3/8 NPT

FURO ϕ 37/64 x 3 13/32 PROF C/ ROSCA 3/8 NPT

2 Furos ϕ 9/16 x 9/16 PROF

FURO ϕ 9/16 x 7/16 PROF

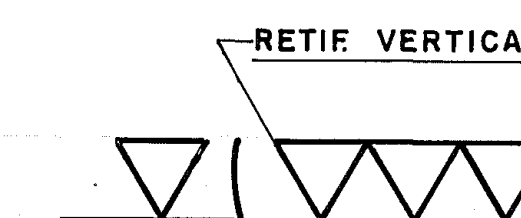

DATA: 05-02-93	VIDROS VITON LTDA.	DES. <i>X176</i>
TOLERANCIAS STANDARD PARA SUPERFICIES USINADAS SEM TOLERANCIA INDICADA	MAT: ALUMINIO EXTRUDADO ASTM 6061-T6	VER. <i>1</i>
DECIMAL: 0,005"	NOME: ADAPTADOR DA CAIXA MECAN. 19 POS. P/ CAIXA ELETR. 21 POS.	N.º DO CONJ. VVM-547
FRAÇÃO: 1/64	NOME: PLACA DE TRANSIÇÃO 19 POS.	N.º DA PEÇA VV-5176
DE 0" ATÉ 6" $\pm$ 1/64	TRAT.	N.º DO DES.
DE 6" ATÉ 24" $\pm$ 1/32	ESCALA: 1:1	
ACIMA DE 24" $\pm$ 1/16		