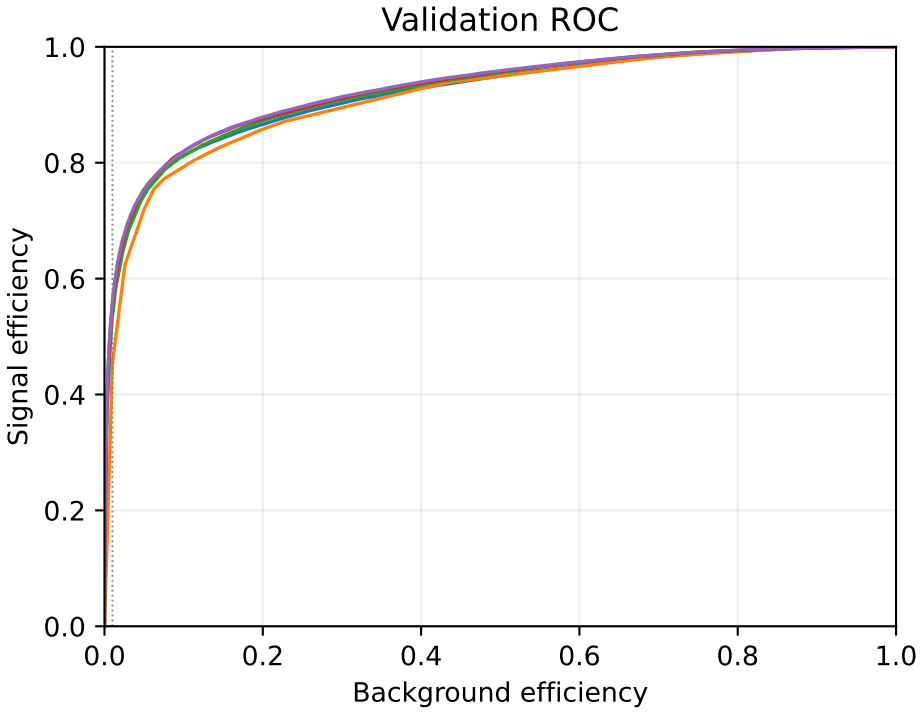
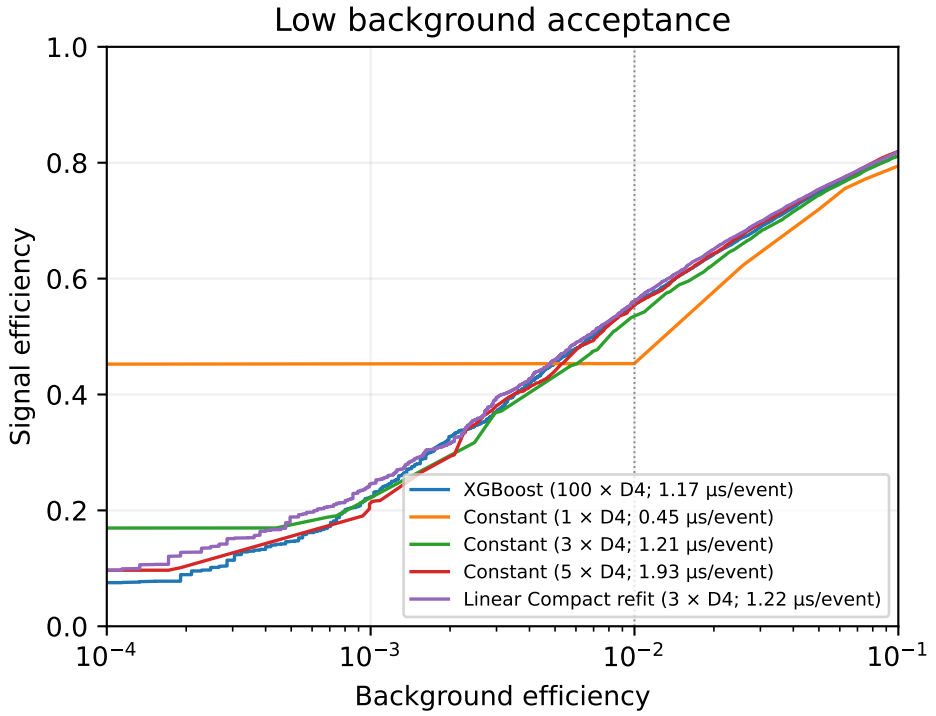

Validation ROC
Signal efficiency
Background efficiency
0.0
0.2
0.4
0.6
0.8
1.0


Low background acceptance
Signal efficiency
Background efficiency
10^{-4}
10^{-3}
10^{-2}
10^{-1}
XGBoost (100 × D4; 1.17 µs/event)
Constant (1 × D4; 0.45 µs/event)
Constant (3 × D4; 1.21 µs/event)
Constant (5 × D4; 1.93 µs/event)
Linear Compact refit (3 × D4; 1.22 µs/event)