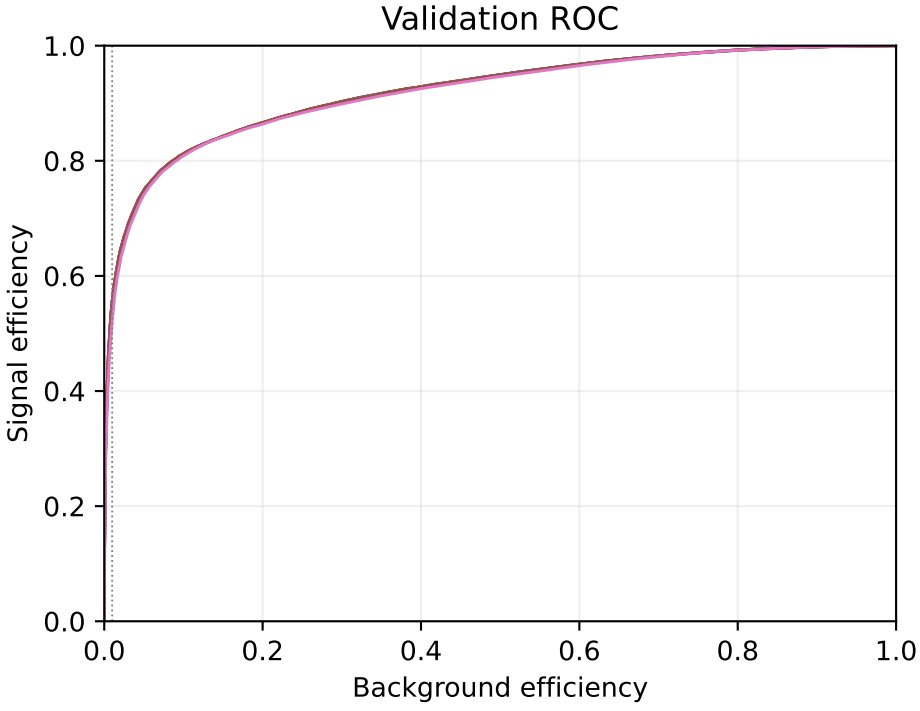
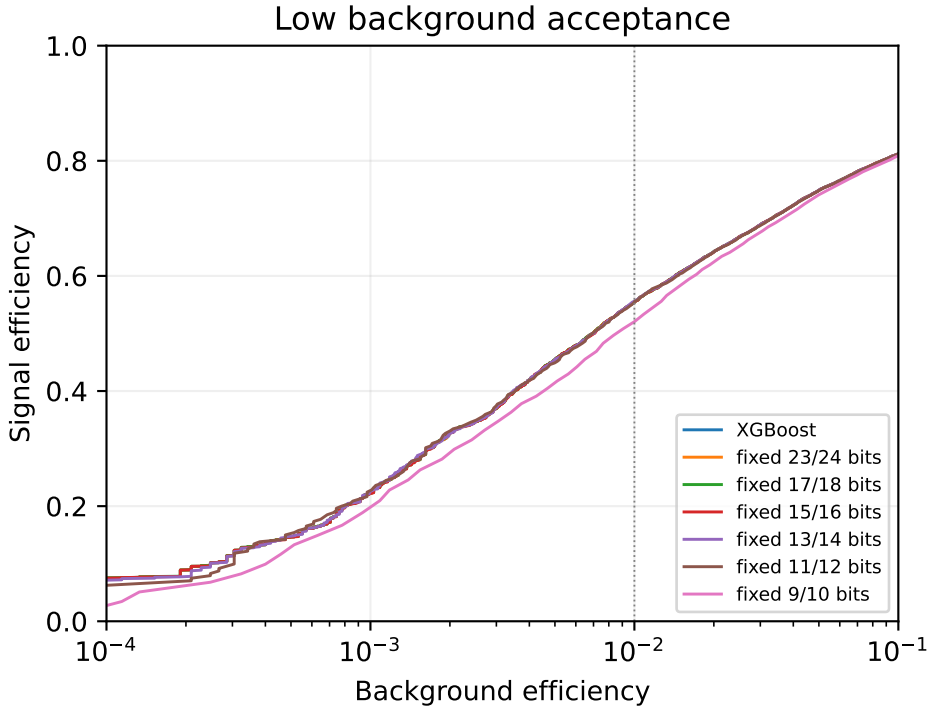

Validation ROC
Signal efficiency
Background efficiency
0.0
0.2
0.4
0.6
0.8
1.0


Low background acceptance
Signal efficiency
Background efficiency
10^{-4}
10^{-3}
10^{-2}
10^{-1}
XGBoost
fixed 23/24 bits
fixed 17/18 bits
fixed 15/16 bits
fixed 13/14 bits
fixed 11/12 bits
fixed 9/10 bits