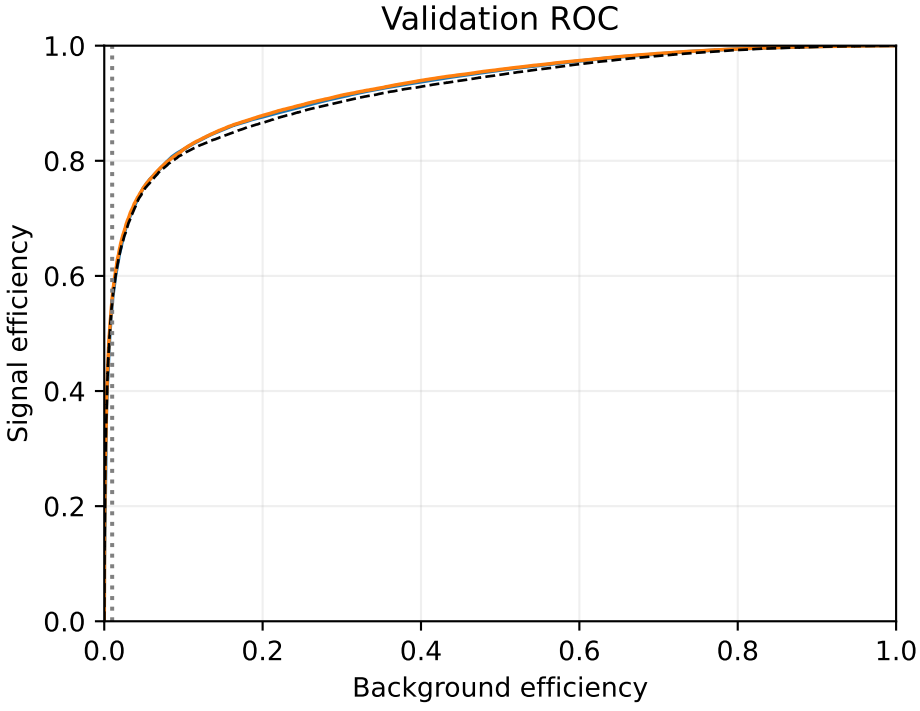
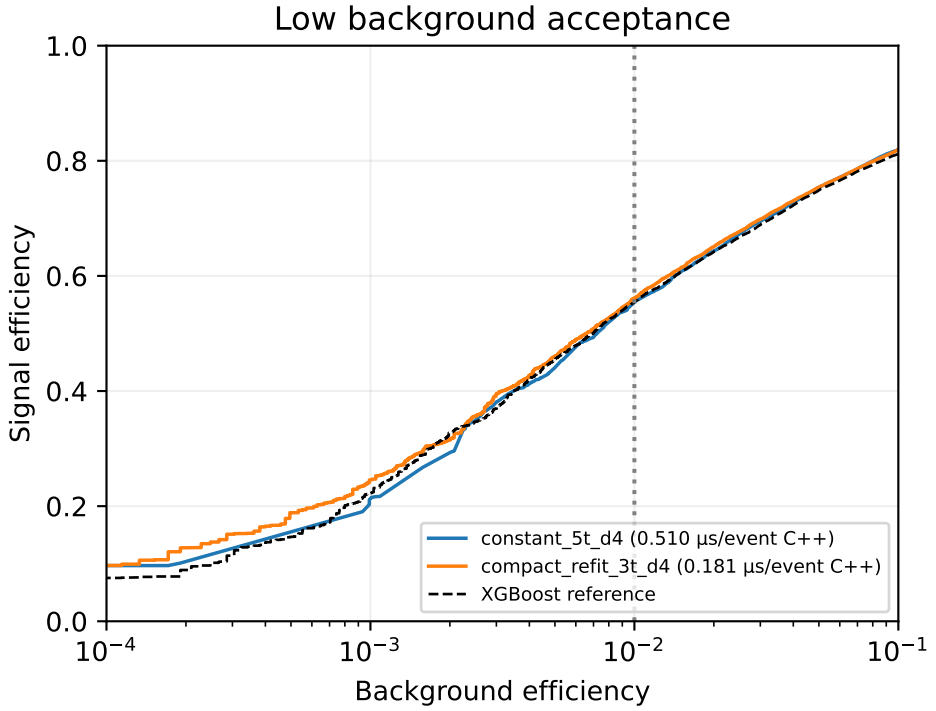

Validation ROC
Signal efficiency
Background efficiency
0.0
0.2
0.4
0.6
0.8
1.0


Low background acceptance
Signal efficiency
Background efficiency
10^{-4}
10^{-3}
10^{-2}
10^{-1}
constant_5t_d4 (0.510 µs/event C++)
compact_refit_3t_d4 (0.181 µs/event C++)
XGBoost reference