


Packet Tracer Lab 3 - Configure Initial Switch Settings

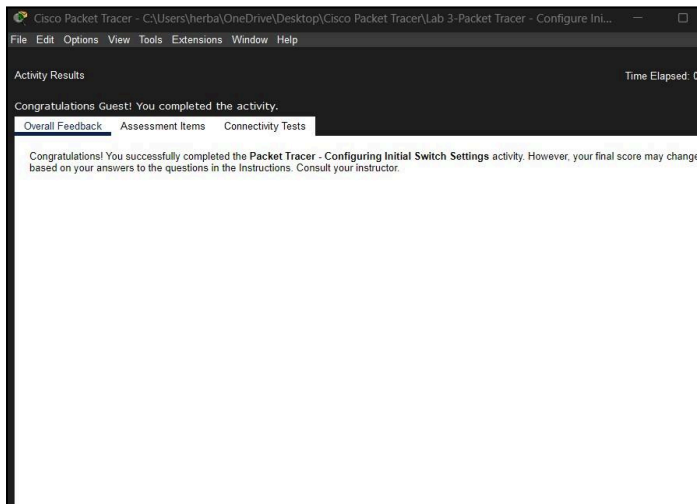

Assessment Items	Status	Points	Component(s)
- Network			
- S1			
Banner MOTD	Correct	6	Basic Security Configuration
- Console Line			
Login	Correct	4	Basic Security Configuration
Password	Correct	4	Basic Security Configuration
Enable Password	Correct	4	Basic Security Configuration
Enable Secret	Correct	4	Basic Security Configuration
Host Name	Correct	5	Hostname Configuration
Service Password Encryption	Correct	4	Basic Security Configuration
Startup Config	Correct	5	Configuration Management
- S2			
Banner MOTD	Correct	6	Basic Security Configuration
- Console Line			
Login	Correct	4	Basic Security Configuration
Password	Correct	4	Basic Security Configuration
Enable Password	Correct	4	Basic Security Configuration
Enable Secret	Correct	4	Basic Security Configuration
Host Name	Correct	5	Hostname Configuration
Service Password Encryption	Correct	4	Basic Security Configuration
Startup Config	Correct	5	Configuration Management

Objectives

Part 1: Verify the Default Switch Configuration

Part 2: Configure a Basic Switch Configuration

Part 3: Configure a MOTD Banner

Part 4: Save Configuration Files to NVRAM

Part 5: Configure S2

Instructions

Part 1: Verify the Default Switch Configuration

Answer the following questions:

1. How many Fast Ethernet interfaces does the switch have? **24**
2. How many Gigabit Ethernet interfaces does the switch have? **02**
3. What is the range of values shown for the vty lines? **0 - 4 and 5 - 15**
4. Which command will display the current contents of non-volatile random-access memory (NVRAM)? **show startup-config displays what's saved in NVRAM, where as, show running-config displays what's currently in RAM**
5. Why does the switch respond with "startup-config is not present?" **nothing has currently been saved to startup-config so it displays not present. how running-config displays what is in NVRAM; however, show startup-config displays**

Part 2: Create a Basic Switch Configuration

6. Why is the **login** command required? **To Enable password checking**
7. What is displayed for the enable secret password? **enable secret 5**
\$1\$mERr\$ILwq/b7kc.7X/ejA4Aosn0
8. Why is the enable secret password displayed differently from what we configured? **Because of the security feature that encrypts it to prevent plain text passwords from being visible if someone views the configuration**
9. If you configure any more passwords on the switch, will they be displayed in the configuration file as plain text or in encrypted form? **Encrypted**
 - a. Explain. **Because the password-encryption command Encrypts system passwords**

Part 3: Configure a MOTD Banner

10. When will this banner be displayed? **The banner displays on initial system access, before the first password**
11. Why should every switch have a MOTD banner? **To be clear to all who attempt access that the system is secured by password protection**

Part 4: Save and Verify Configuration Files to NVRAM

12. What is the shortest, abbreviated version of the **copy running-config startup-config** command? **cop r st**
13. Which command will display the contents of NVRAM? **Show running-config and show startup-config**
14. Are all the changes that were entered recorded in the file? **yes**