


Packet Tracer Lab 5 - Basic Switch and End Device Configuration

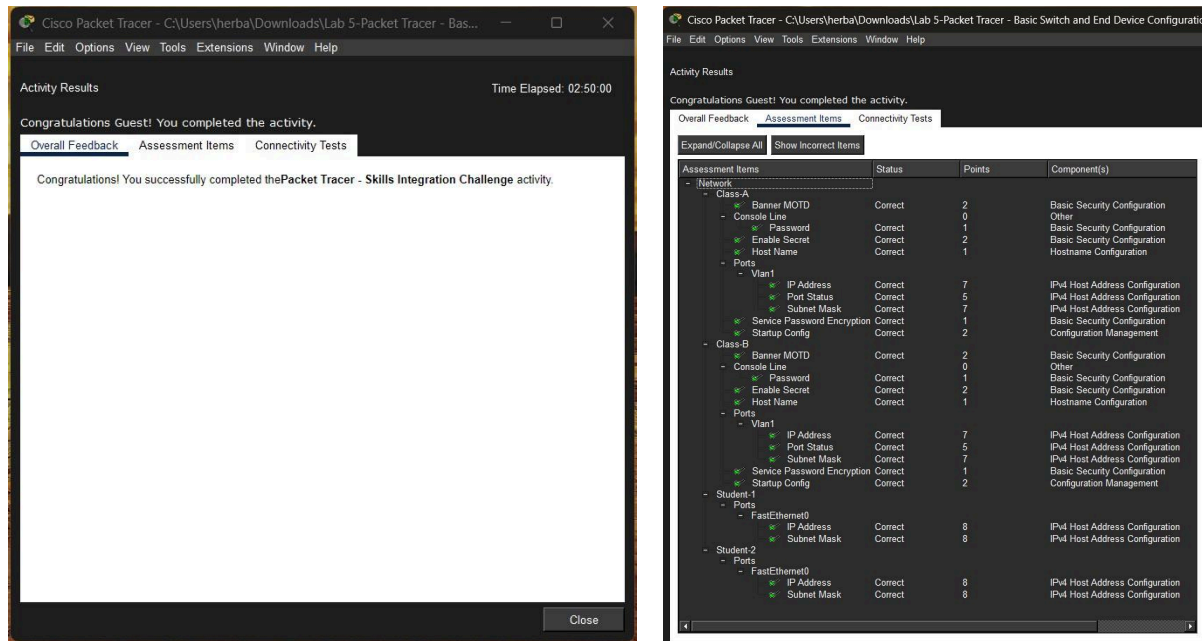

Addressing Table

Device	Interface	IP Address	Subnet Mask
Class-A	VLAN 1	128.107.20.10	255.255.255.0
Class-B	VLAN 1	128.107.20.15	255.255.255.0
Student-1	NIC	128.107.20.25	255.255.255.0
Student-2	NIC	128.107.20.30	255.255.255.0

Objectives

- = Configure hostnames and IP addresses on two Cisco Internetwork Operating System (IOS) switches using the command-line interface (CLI).
- = Use Cisco IOS commands to specify or limit access to the device configurations.
- = Use IOS commands to save the running configuration.
- = Configure two host devices with IP addresses.
- = Verify connectivity between the two PC end devices.

Scenario

As a recently hired LAN technician, your network manager has asked you to demonstrate your ability to **configure a small LAN**. Your tasks include **configuring initial settings on two switches** using

the Cisco IOS and **configuring IP address parameters on host devices** to provide end-to-end connectivity. You are to use **two switches** and **two hosts/PCs** on **a cabled and powered network**.

Instructions

Configure the devices to fulfill the requirements below.

Requirements

- = Use a console connection to access each switch.
- = Name **Class-A** and **Class-B** switches.
- = Use the (**xAw6k**) password for all lines.
- = Use the (**6EBUp**) secret password.
- = Encrypt all clear text passwords.
- = Configure an appropriate message-of-the-day (MOTD) banner.
- = Configure addressing for all devices according to the Addressing Table.
- = Save your configurations.
- =

Note: Click **Check Results** to see your progress. Click **Reset Activity** to generate a new set of requirements. If you click on this before you complete the activity, all configurations will be lost.