


Selected-model performance across time horizons

Synthetic untouched test and deliberately shifted stress cohorts; recall is prioritised over average discrimination.

Critical-case recall

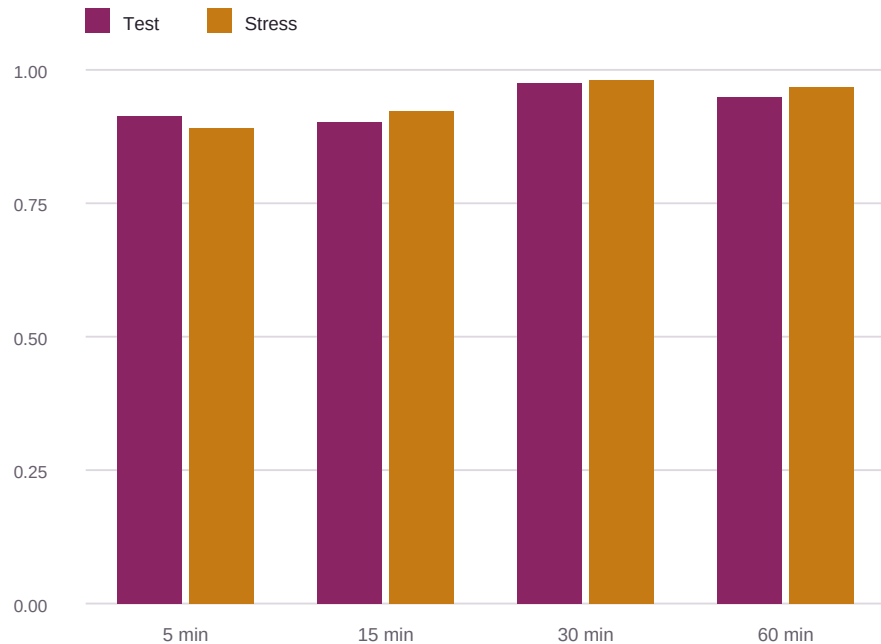

Expected calibration error



Gate: test recall ≥ 0.90 ; stress recall ≥ 0.85 . Stress calibration degrades materially, motivating OOD + Safe Mode.