



PTS-1

PADS™ Amplified Tube Speaker

- PADS™ Pragmatic proprietary technology for stereo audio, power and control signals on a single cat5 cable
- Easily expandable to multi-source, multi-zone applications
- 300 ft. / 100m transmission distance on standard cat5/cat5e or cat3/cat6 and other unshielded twisted pair (UTP) cables / shielded twisted pair cables
- Plug-and-play simplicity, simple point-to-point, daisy-chain or star distribution
- Energy efficient and very low power consumption
- Made in USA



Applications:

Background music system
Multi-room audio system
School and college campus
Hospitals/Healthcare facilities
Theme parks/Outdoor events
Health/Fitness clubs
Tanning salons
Hotel Lobbies /Restaurants

TO PLACE an ORDER or for QUESTIONS,

Emails Us: sales@wireless-experts.com, Call Us: (408) 748-1100 or Fax Us: (408) 663-9783



PR-VC



PR-KP

AUDIO/POWER CONNECTOR	RJ-45
FREQUENCY RESPONSE	120 Hz - 20KHz typical
DISTORTION	<0.1% typical
DYNAMIC RANGE	>90 dB
SIGNAL-TO-NOISE RATIO	> 90 dB
POWER OUTPUT	81 dBspl @ 1W/1m typical, 3W RMS max.
OUTPUT PATTERN	Omni-directional point source
POWER	DC 12V(typ.) 15V (max),
OPERATING CONDITIONS	Temperature 50°-104°F (10°-40°C), Humidity 20-85% (non-condensing)
DIMENSIONS (HxWxD)	2" diameter x 4.8" high
WEIGHT	Net 4.5 oz.
COLOR	Natural white, optional Gray or Black
WARRANTY	One year limited warranty on parts and labor





PHUSB 3-Port USB Audio hub



PH-4 4-port hub

Typical application

PH16 16-port hub

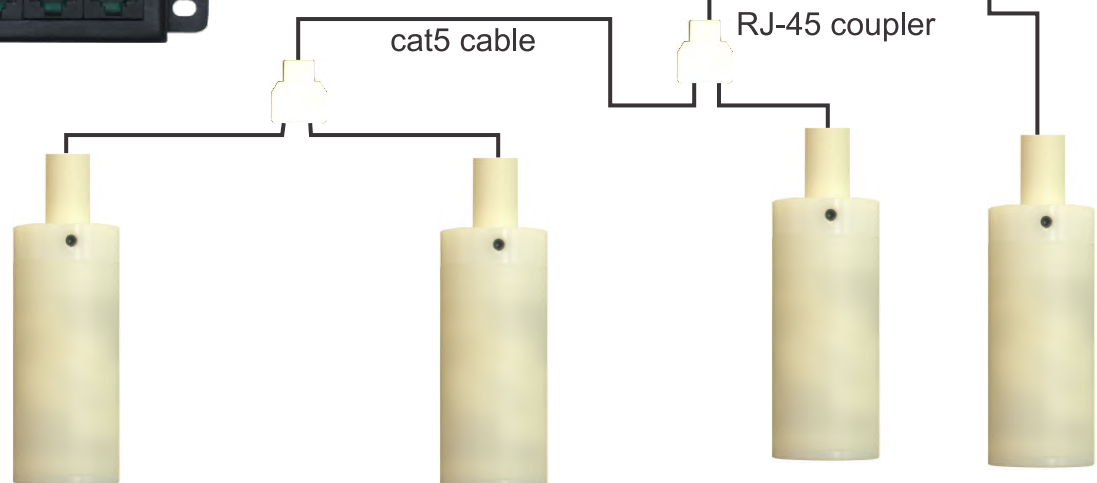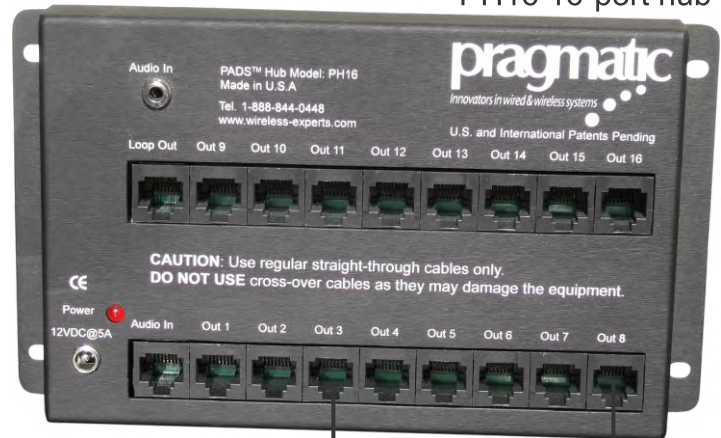

RELATED PRODUCTS

- MuSe™ Music Server
- PR-VC PADS™ Rotary Volume Control
- PR-VC PADS™ Keypad Digital Volume Control
- PH4 PADS™ 4-port hub
- PH16 PADS™ 16-port hub
- PHUSB-3 PADS™ 3-port USB Audio Hub

TO PLACE an ORDER or for QUESTIONS,
Emails Us: sales@wireless-experts.com, Call Us: (408) 748-1100 or Fax Us: (408) 663-9783