

» PTS-4077F

High-performance Tile Array Directional Speaker with DAC™ (Defined Acoustic Coverage)

Directional Tile Array Speaker

The PTS-4077F is a high-performance focused tile-array active speaker. It consists of an array of high performance, full range drivers which offer a very well-defined dispersion pattern with no hot spots. It offers the best sound quality of any focused sound technology on the market. It has the greatest low-frequency capability of any directional speaker in the industry. The unique design of the PTS-4077F array offers excellent sound pattern control. The speaker offers excellent speech intelligibility as well as great musicality. The high performance drivers provide crystal clear and engaging audio to the audience with a full-frequency response in the audible zone. The highly directional sound from the speaker creates a well-defined audio zone and eliminates sound bleeding into adjacent areas/zones. This compact tile-array speaker is designed to be installed as a stand-alone unit or can be paired with a variety of digital displays in retail, educational, industrial and commercial applications. It is retrofit friendly, quick and easy to install in standard commercial drop-tile ceilings. Cat5 plug-and-play operation reduces labor costs for installation.

The PTS-4077F is very easy to mount in the standard commercial drop-tile ceilings. With optional mounting brackets, it can also be suspended in open ceiling spaces. This high performance directional speaker is well suited for hotel kiosks, restaurants, theme parks, museums, art galleries, collaborative learning spaces or department store digital signage for an audience of a few in a very controlled sound dispersion zone.

The speaker is part of the PADS™ family and easily integrates with other PADS™ components. In areas with highly varying ambient noise, it can be used with the PALS™ (Pragmatic Audio Leveling System) for automatic volume control based on the ambient noise.

Feature & Benefits:

- Innovative design, highly focused sound
- Quick and easy to install, retrofit friendly
- High efficiency, full-range drivers
- Great low frequency response
- Excellent speech intelligibility
- Energy efficient internal audio amplifier
- Cat5 cable simple plug-and-play operation
- Reduces installation labor costs
- CE compliant
- Standard drop-tile 2' x 2' (600mm x 600 mm)

Specifications:

Frequency Response: 200Hz - 10kHz

Sensitivity: > 96dB @ 1W/1m

Dimensions (HxWxD): 24" x 24" x 3"


Weight: 12 lbs.

Finish: White, (Black, Silver, etc. custom)

Grille: perforated aluminum

Applications:

- Digital signage directional speakers
- Museums, exhibits, displays, libraries
- HealthCare waiting areas, POP displays
- Collaborative educational spaces
- Applications in hotels, fitness clubs, restaurants, theme parks, shopping malls, grocery stores, retail, entertainment, etc.

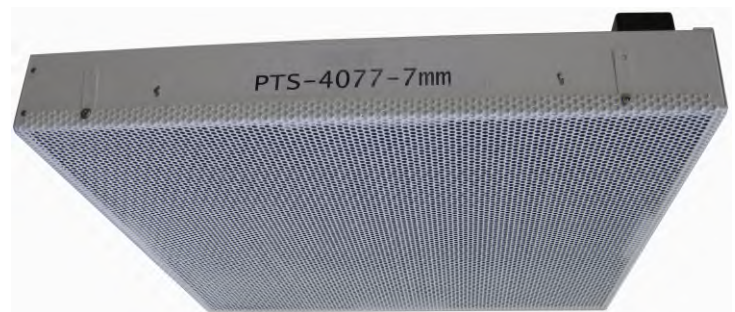


*US and International patents pending

TO PLACE an ORDER or for QUESTIONS,

Emails Us: sales@wireless-experts.com, Call Us: (408) 748-1100 or Fax Us: (408) 663-9783

System components of PTS-4077F and connections diagrams

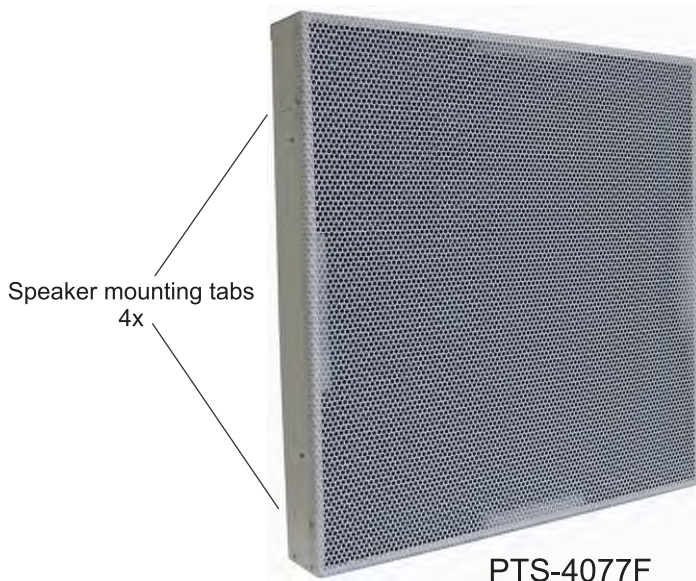

PH-1AA

(PADS™ 1-port hub and power supply included with PTS-4077F package)

Rear connection view for PTS-4077F




Optional component



PALS™


Pragmatic ambient noise-sensing Automatic Audio Leveling System with 4 microphone input hub

Typical Connections Diagram:

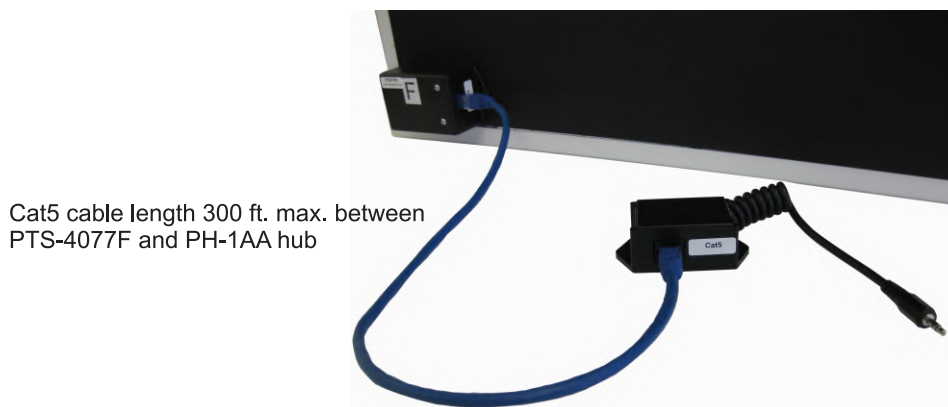



TO PLACE an ORDER or for QUESTIONS,
Emails Us: sales@wireless-experts.com, Call Us: (408) 748-1100 or Fax Us: (408) 663-9783

Sound dispersion polar plots of PTS-4077F speaker at various frequencies

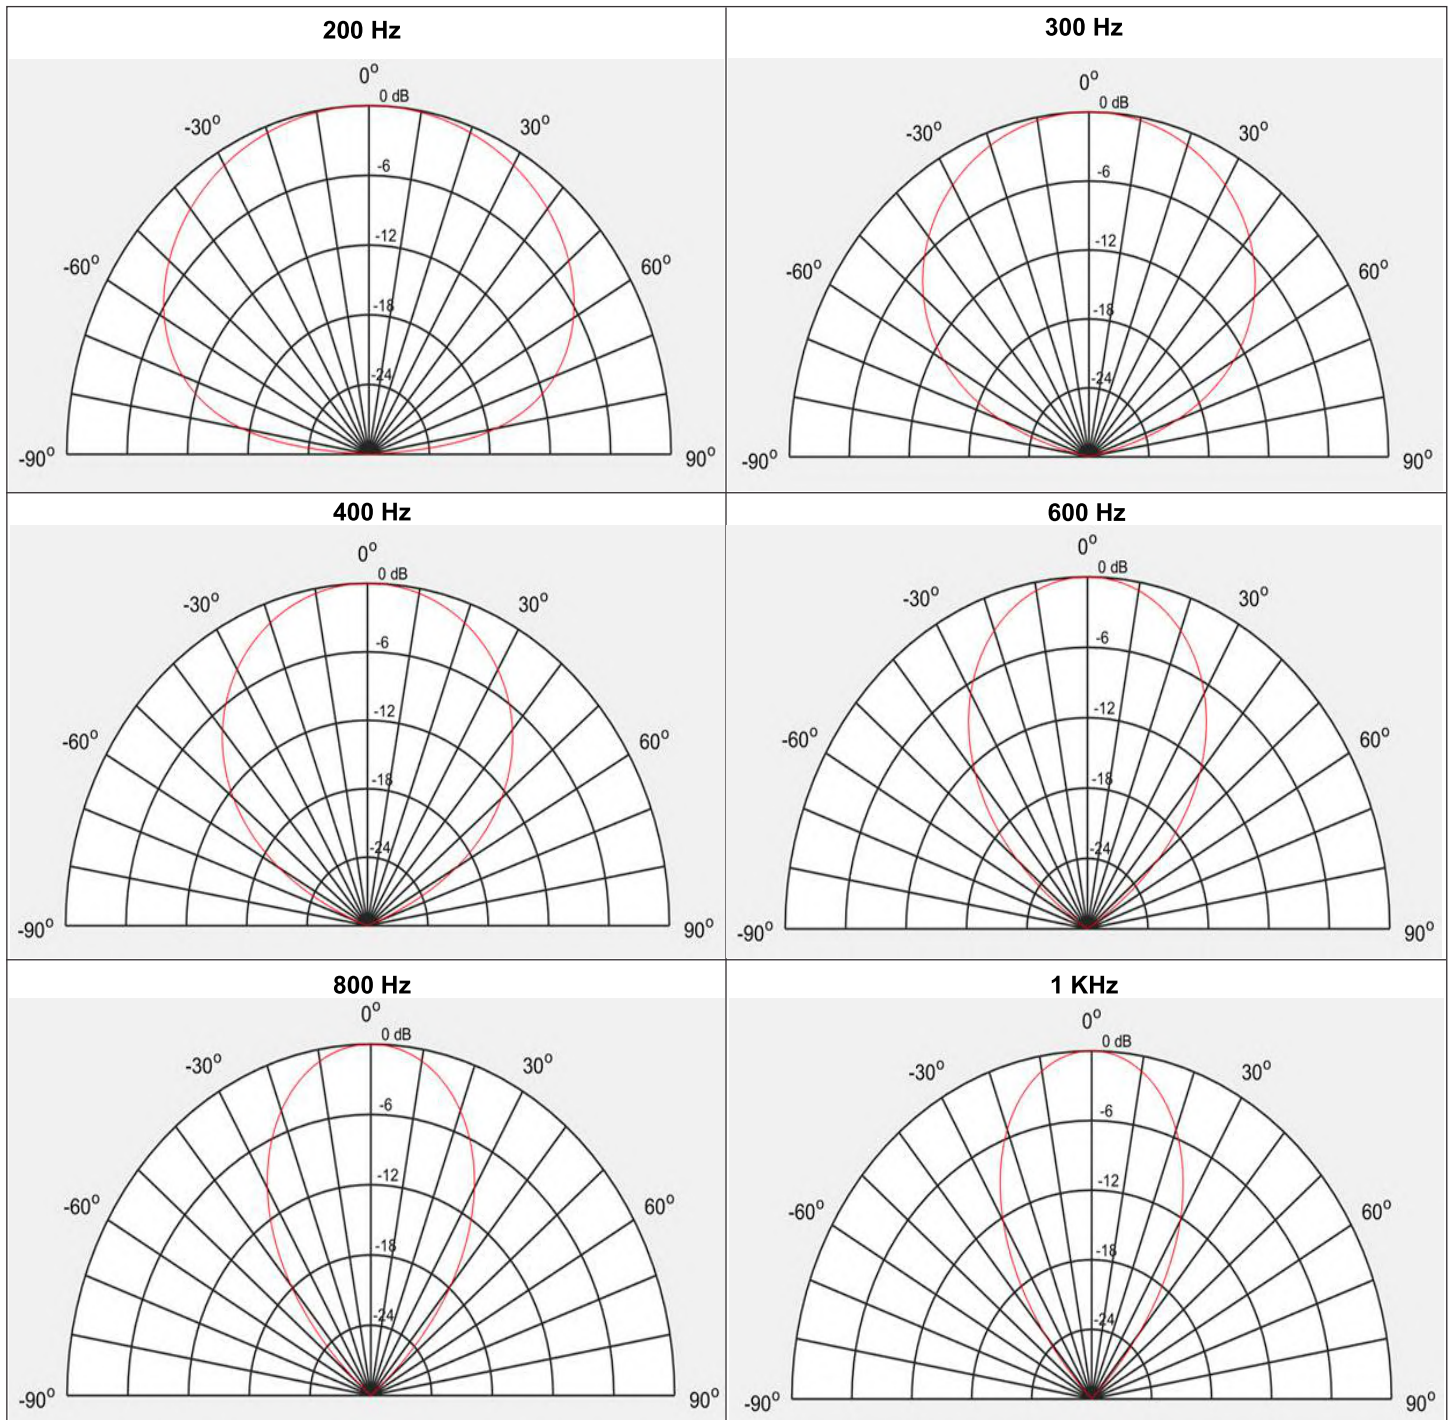


TO PLACE an ORDER or for QUESTIONS,
Emails Us: sales@wireless-experts.com, Call Us: (408) 748-1100 or Fax Us: (408) 663-9783

Sound dispersion actual measured polar response of PTS-4077F speaker

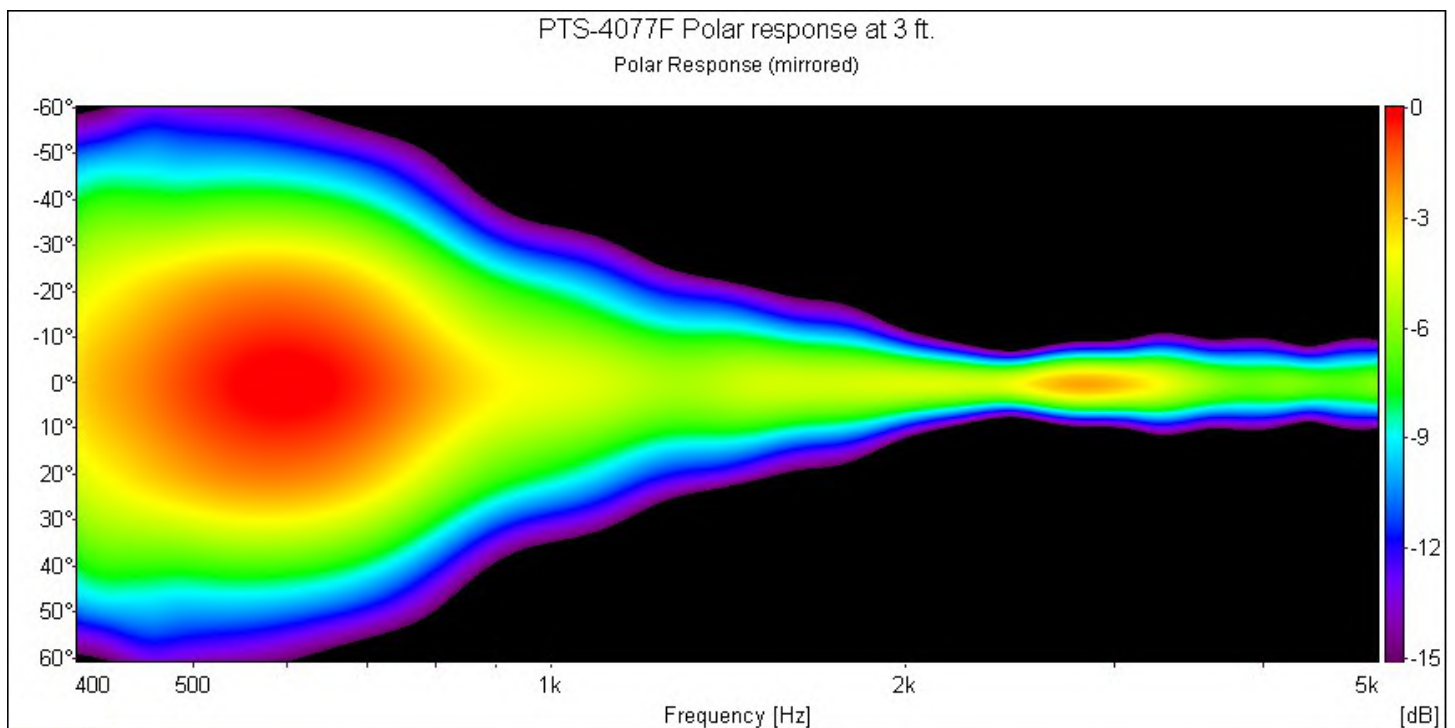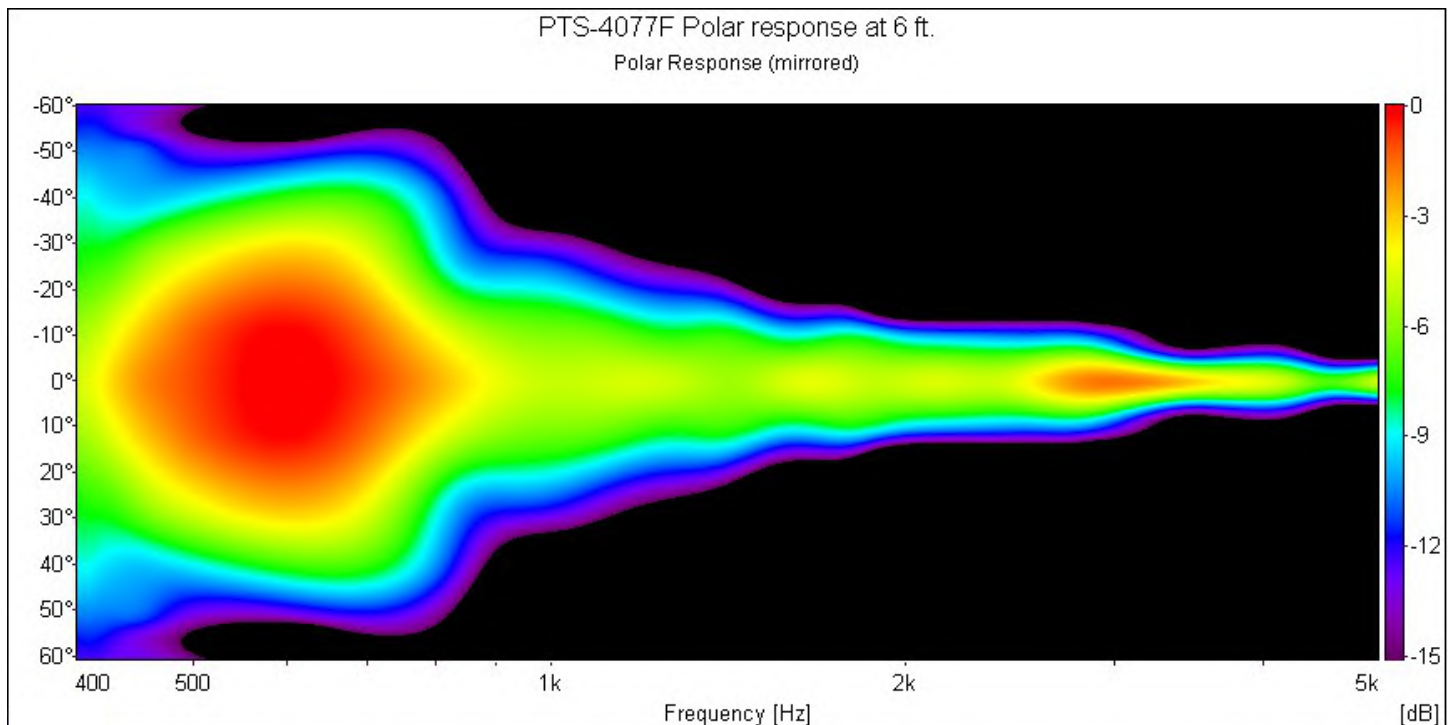


TO PLACE an ORDER or for QUESTIONS,
Emails Us: sales@wireless-experts.com, Call Us: (408) 748-1100 or Fax Us: (408) 663-9783

Applications of directional tile speaker in commercial environment with 12 feet ceiling height

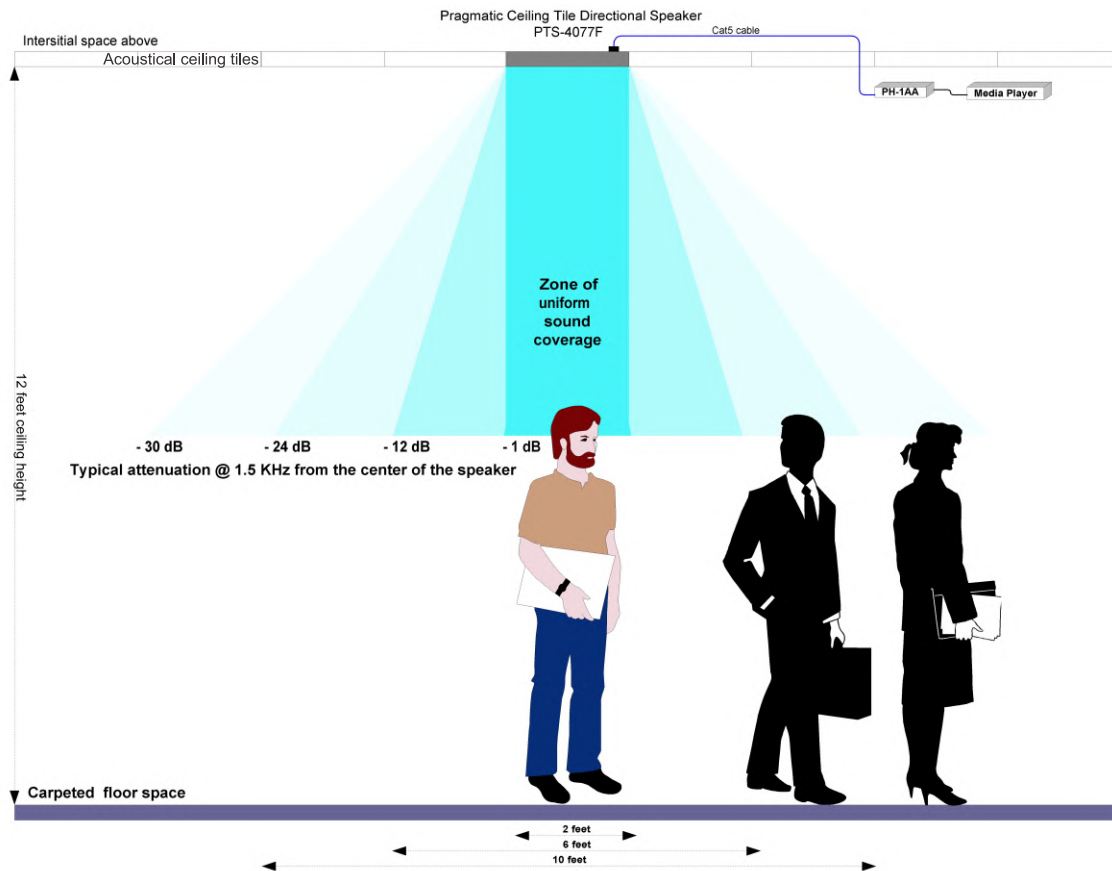

Applications of directional tile speaker in commercial environment with 9 feet ceiling height

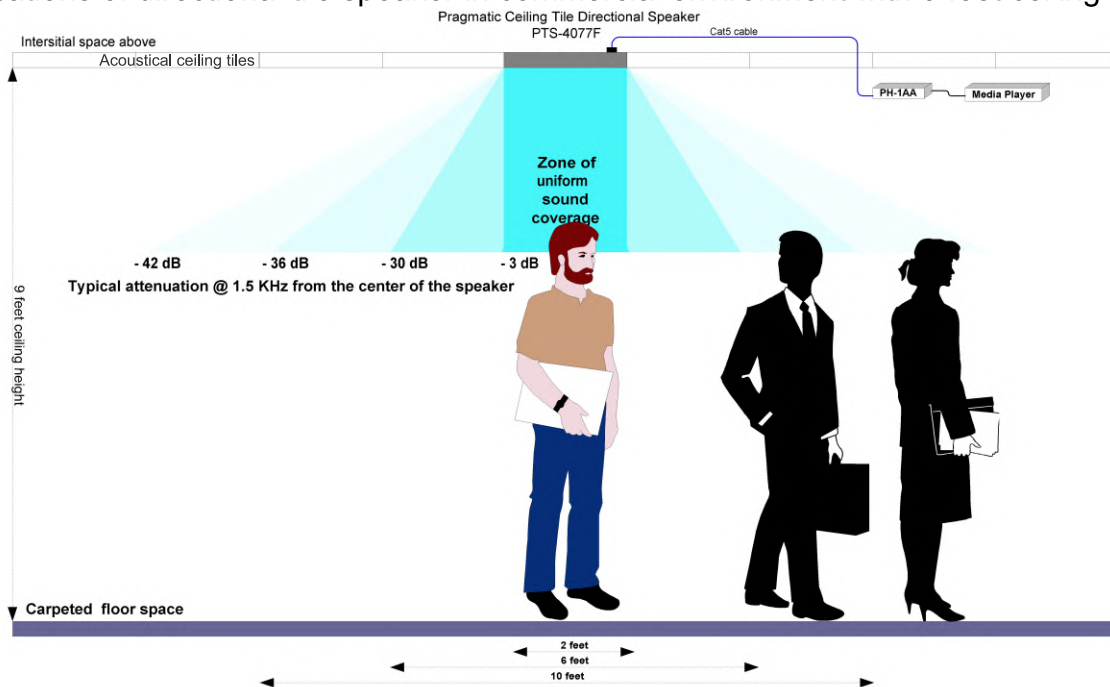

TO PLACE an ORDER or for QUESTIONS,
Emails Us: sales@wireless-experts.com, Call Us: (408) 748-1100 or Fax Us: (408) 663-9783

Applications of PTS-4077F directional speaker in digital signage at airport terminal



Applications of PTS-4077F directional speakers in collaborative learning spaces



TO PLACE an ORDER or for QUESTIONS,
Emails Us: sales@wireless-experts.com, Call Us: (408) 748-1100 or Fax Us: (408) 663-9783