
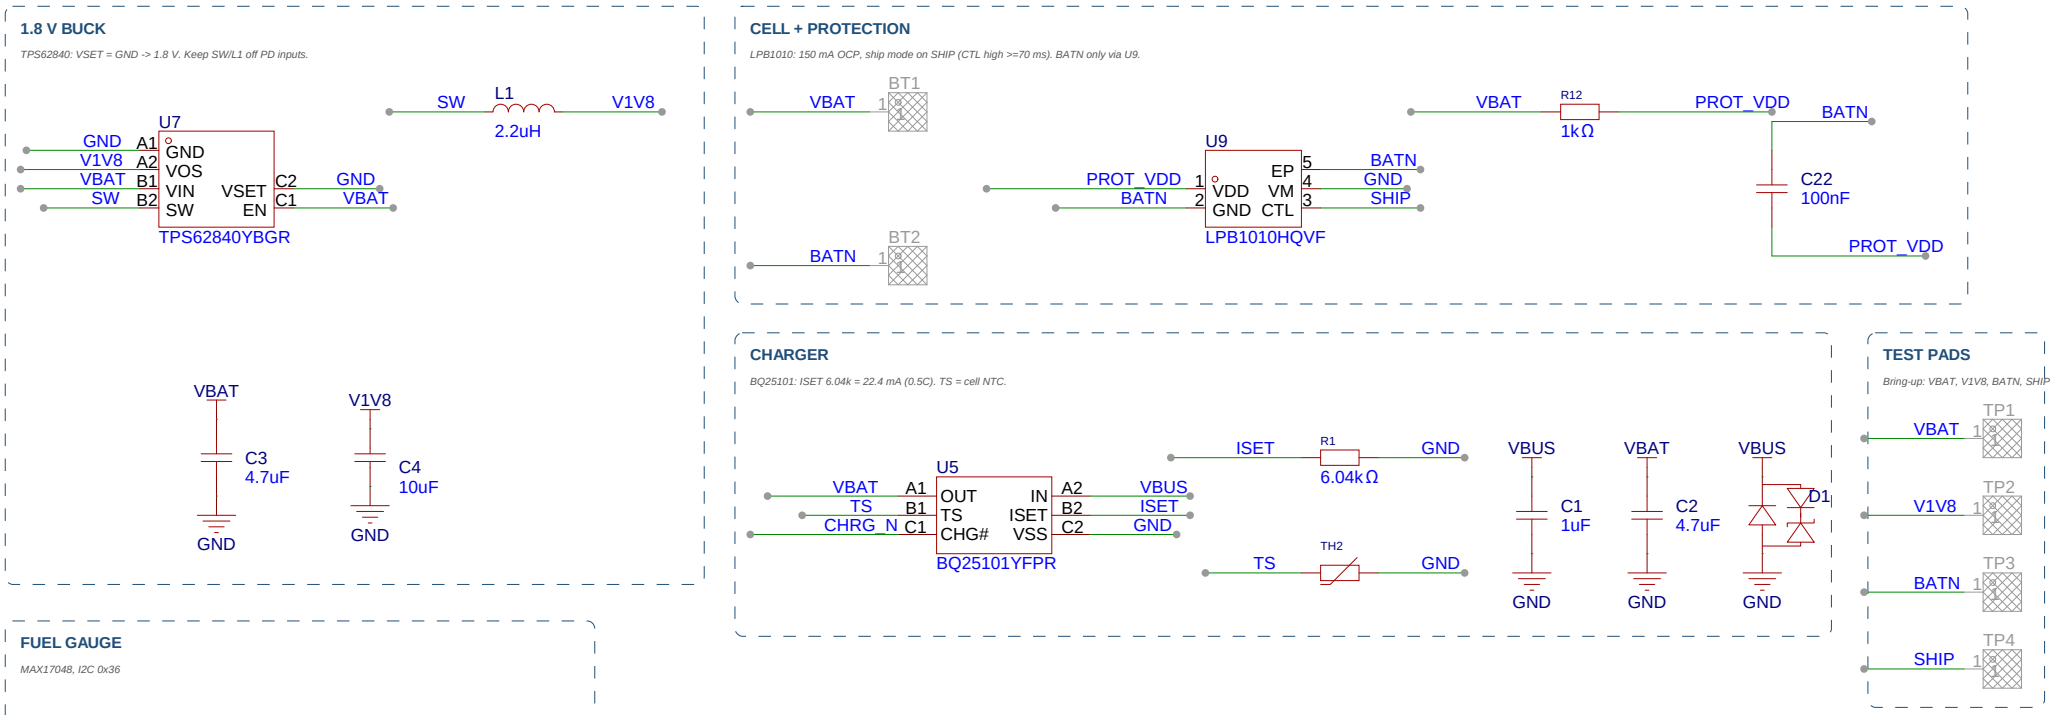


Schematic	Pod_Schematic	Create at	2026-11-06
		Update at	2026-11-06
Board	Pod	Page	1_Power
Drawn	Het Bhavsar	Atrium	
Reviewed			
		Version	Size
Local Forge		V1.0	A4
		Page 1 Total 4	
		Local Forge	


nRF52832 (WLCSP, LDO mode, VDD 1.8 V)

I2C on P0.06/P0.07. P0.26/27 low-drive only.

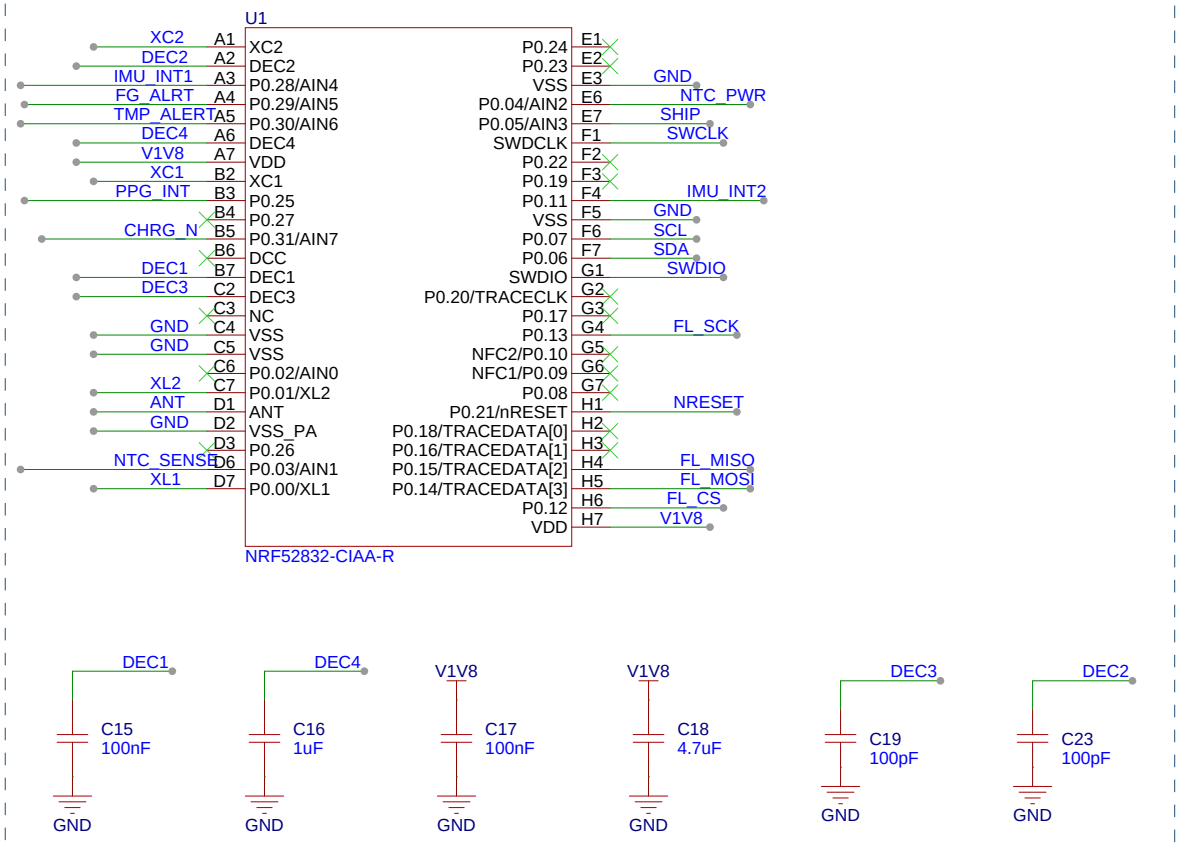


RF MATCH + ANTENNA

Nordic ref start: 1.0 pF / 3.3 nH. Tune on VNA in shell.

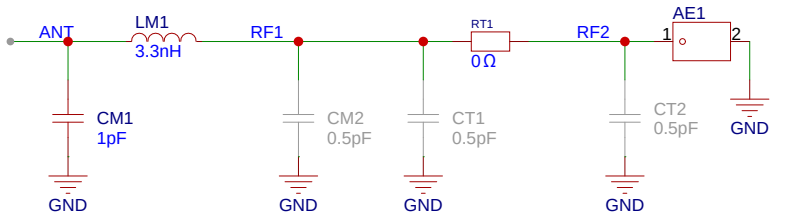


CLOCKS

32 MHz CL 8 pF; 32.768 kHz CL 7 pF

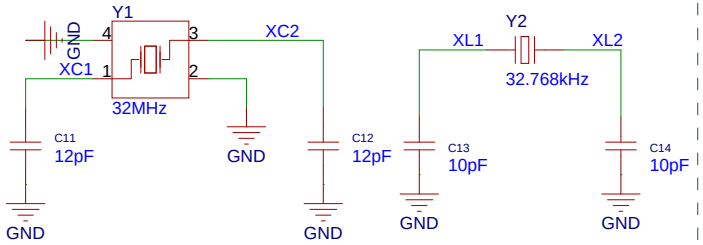


EDGE NTC

Divider powered from NTC_PWR only while sampling

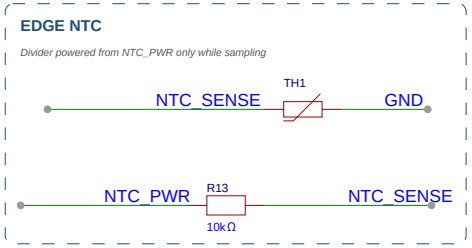


I2C PULL-UPS

4.7k to V1V8

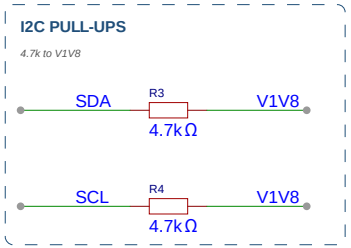

Schematic	Pod_Schematic	Create at	2026-11-06
		Update at	2026-11-06
Board	Pod	Page	2_MCU_RF
Drawn	Het Bhavsar	Atrium	
Reviewed			
		Version	Size / Page 2 Total 4
Local Forge		V1.0	A4 / Local Forge

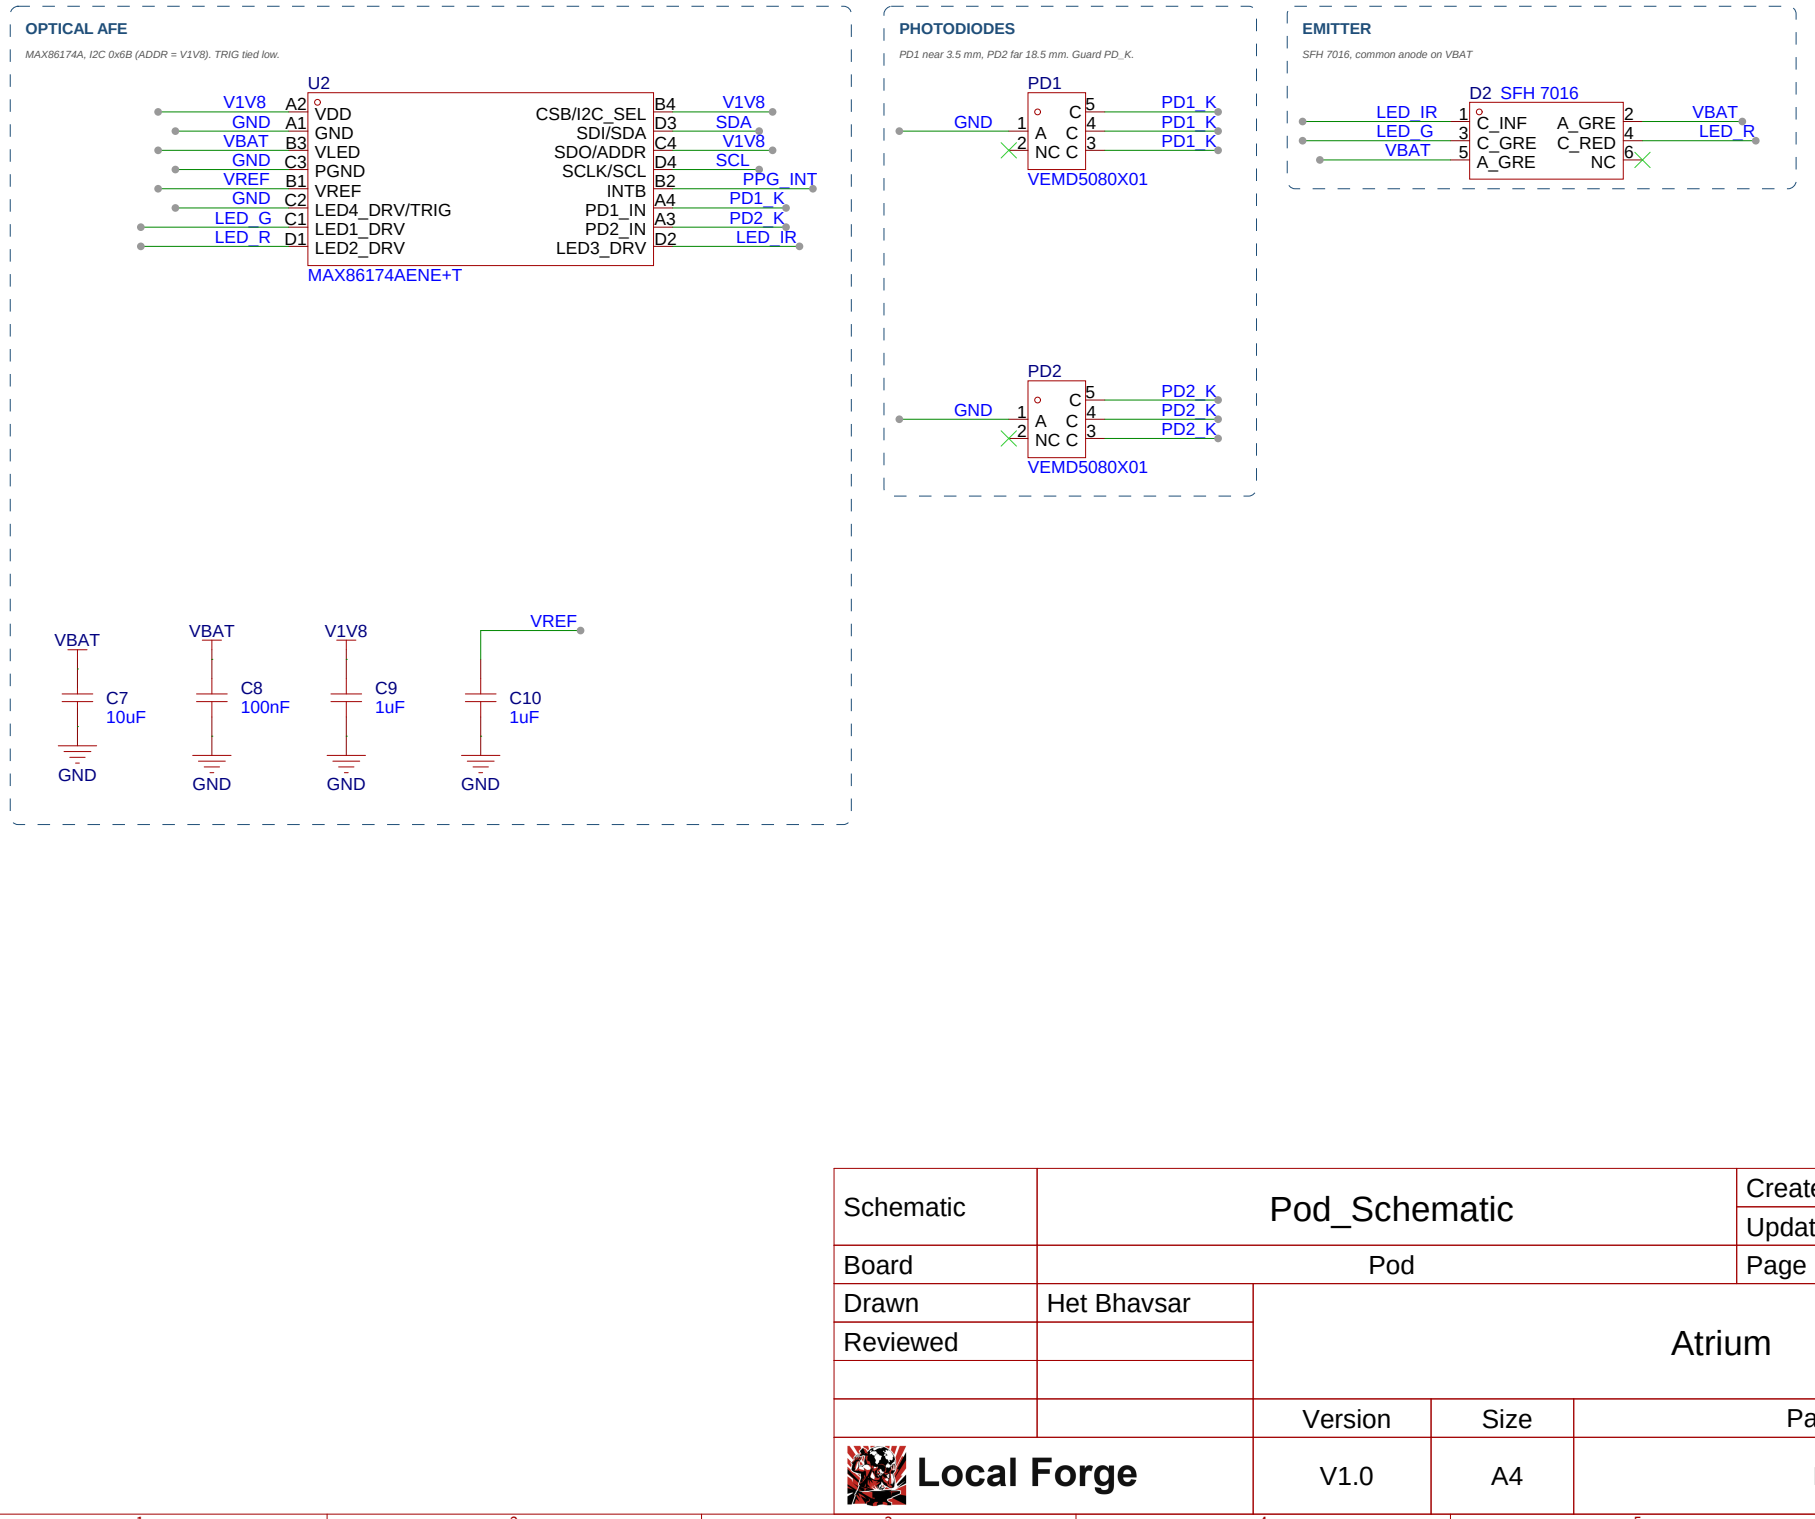


Schematic	Pod_Schematic	Create at	2026-11-06
		Update at	2026-11-06
Board	Pod	Page	3_Optical
Drawn	Het Bhavsar	Atrium	
Reviewed			
		Version	Size
Local Forge		V1.0	A4

Page 3 Total 4

Local Forge


IMU

LSM6DSV16X, I2C 0x6A

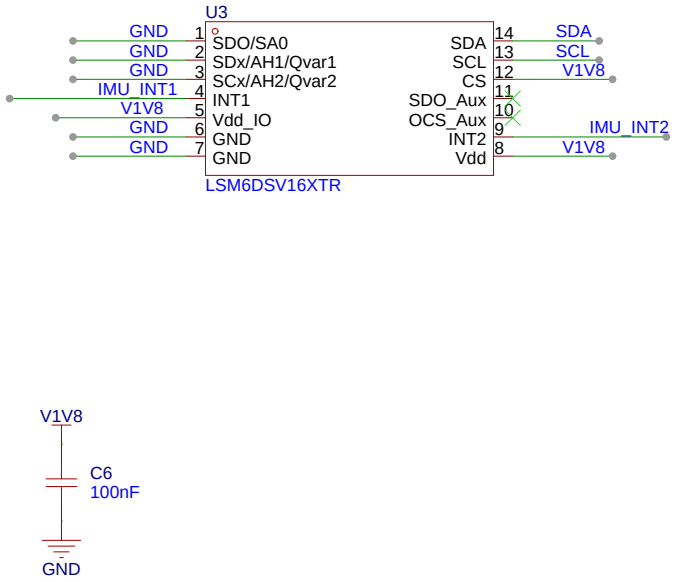


SKIN TEMPERATURE

TMP117, I2C 0x48

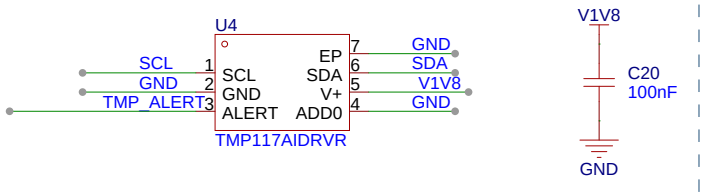


POGO PADS + SWD

J1 VBUS, J2 GND, J3-J5 SWD

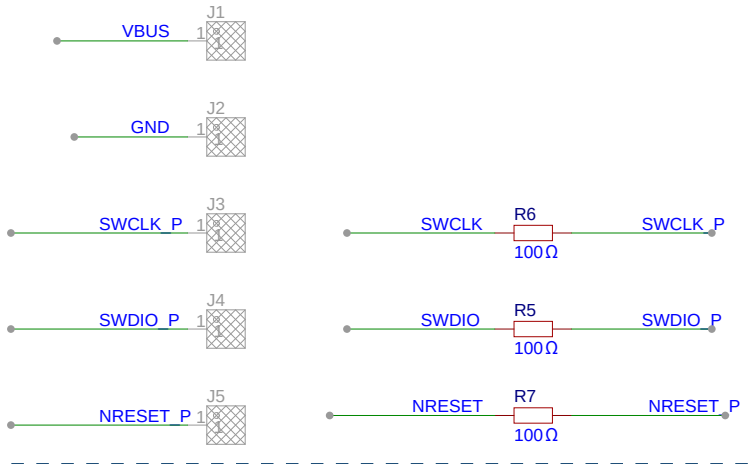

LOG FLASH

W25Q64JW, 1.8 V SPI

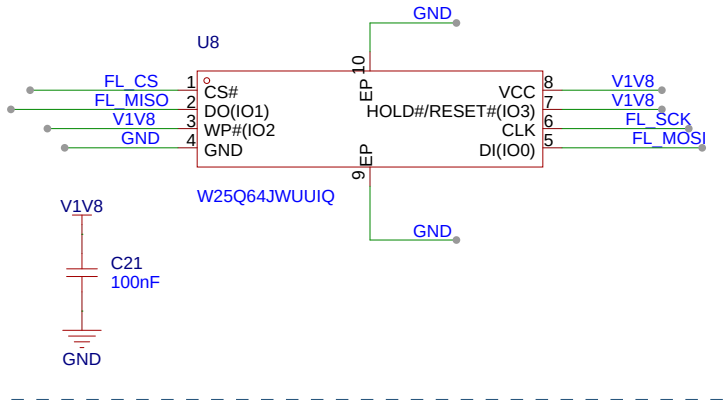

Schematic	Pod_Schematic	Create at	2026-11-06
		Update at	2026-11-06
Board	Pod	Page	4_Sensors
Drawn	Het Bhavsar	Atrium	
Reviewed			
		Version	Size
Local Forge		V1.0	A4
		Page 4 Total 4	
		Local Forge	