





VDD/VDDA Coupling



Vref Coupling




VDDIO2 Coupling




Module H21R2	Title H21R2_Backend
Description ESP32-C3 Wifi+BLE	Revision 0
Author	Size Letter
	Sheet 1 of 2

VDD=3.3 Volts



To use external JTAG debugger
desolder R11 & R12 & R13

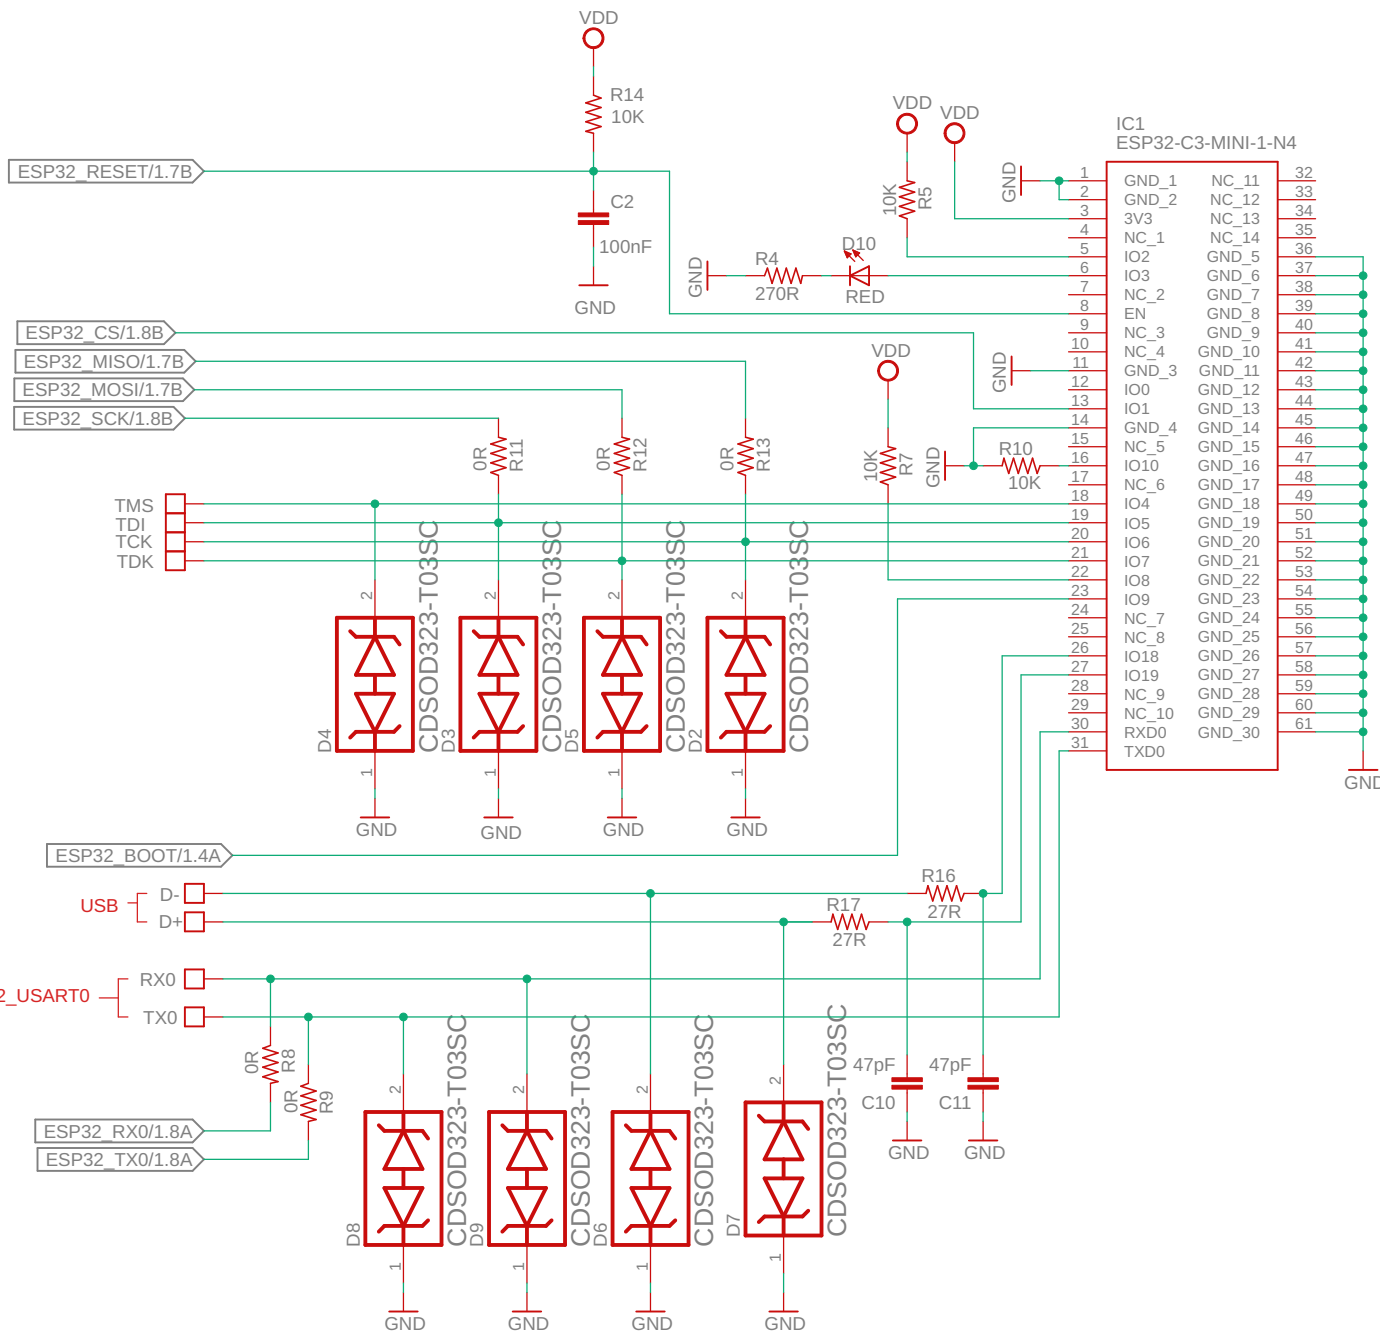

To use external FTDI
desolder R8 & R9

Module H21R2	Title H21R2_Frontend
Description ESP32-C3 Wifi+BLE	Revision 0
Author	Size Letter
	Sheet 2 of 2



www.hexabitz.com