

CR2032 in the belly




Boop the nose: power while pressed, B5819W blocks back-feed



Left foot: drives every line (150 ohm each)

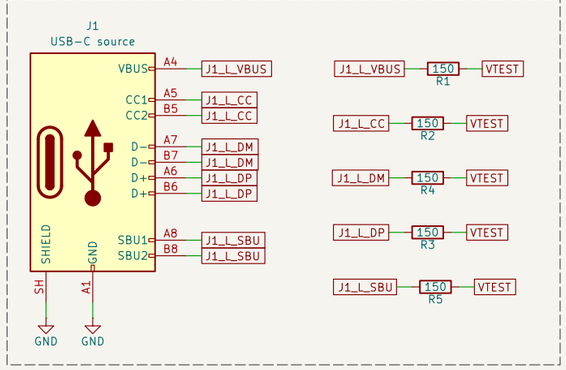


Right foot: one LED per line that arrives

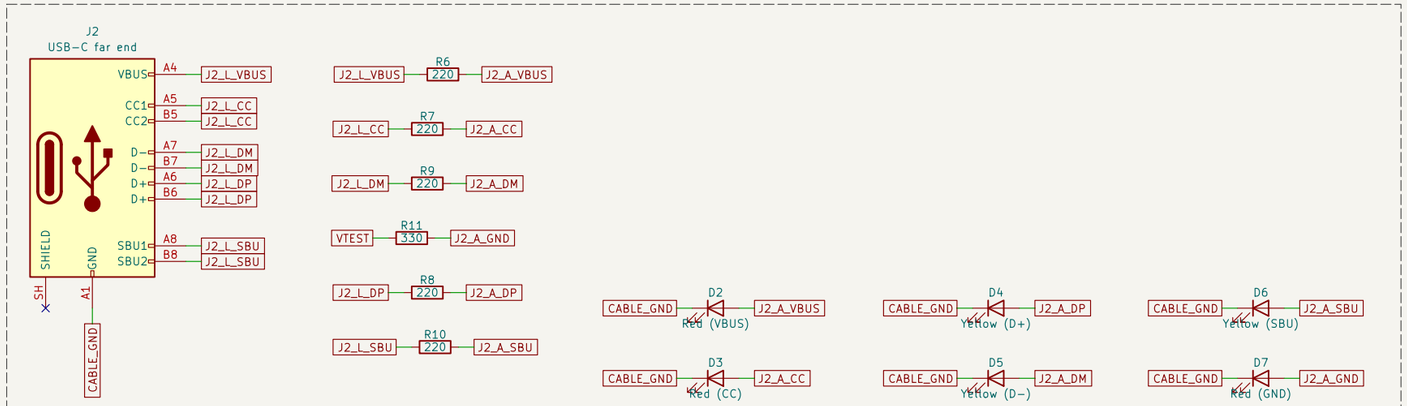

Heart: the cell is good



Power flags



Generated from blocks -> design.json by heypcb-kicad

HeyPCB method / pure KiCad

Sheet: /

File: cable_bunny.kicad_sch

Title: Cable Bunny — USB-C cable tester: VBUS, GND, CC, D+, D-, SBU, CR2

Size: A3	Date: 2026-10-05	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1