


USB-C 5 V in, native USB

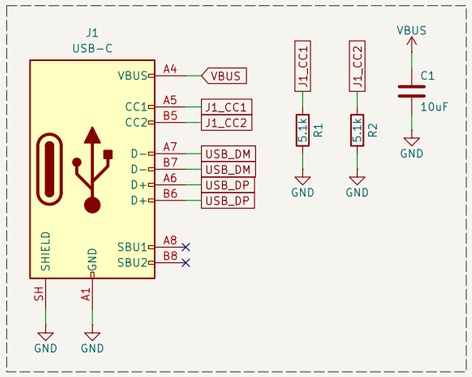


USB ESD clamp




3.3 V LDO

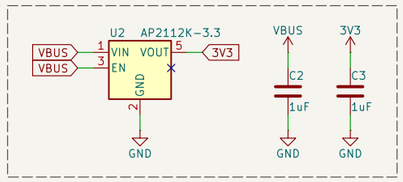


ESP32-S3-WROOM-1-N16R8

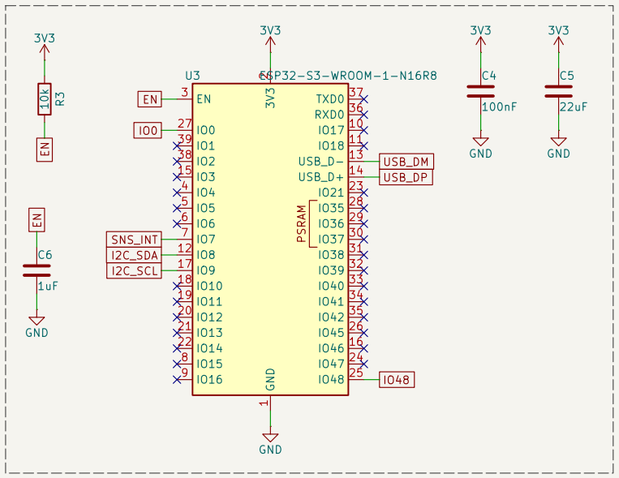

BOOT (IO0)




RESET (EN)



User LED (IO48)

3V3 power LED



ST LIS3MDL 3-axis magnetometer

I2C pull-ups



Power flags



Generated from blocks -> design.json by heypcb-kicad

HeyPCB method / pure KiCad

Sheet: /

File: esp32_lis3mdl.kicad_sch

Title: HeyPCB ESP32-S3 LIS3MDL – ST LIS3MDL 3-axis magnetometer

Size: A3	Date: 2026-10-18	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1