


USB-C 5 V in, native USB

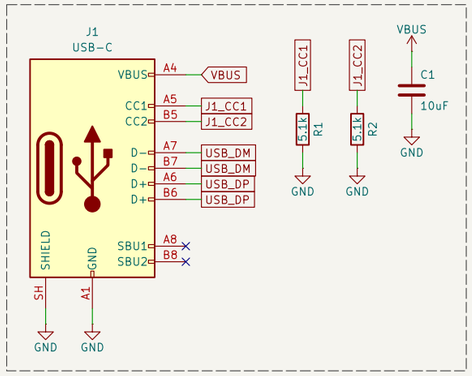


USB ESD clamp




3.3 V LDO

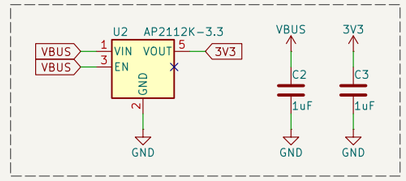


ESP32-S3-WROOM-1-N16R8

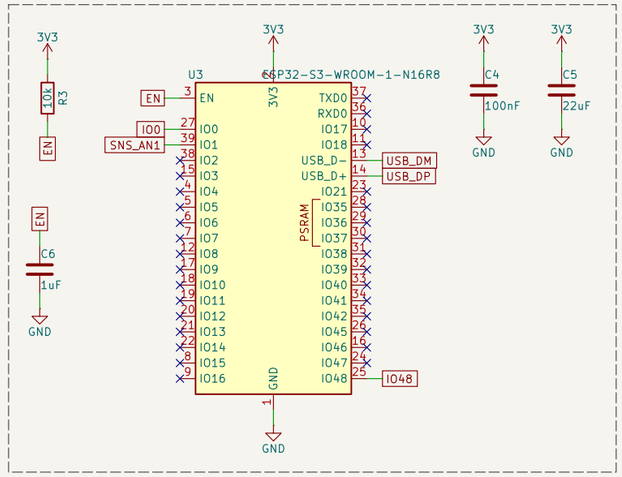

BOOT (IO0)




RESET (EN)




User LED (IO48)

3V3 power LED



TI DRV5055A2 ratiometric linear Hall sensor (+-31 mT)

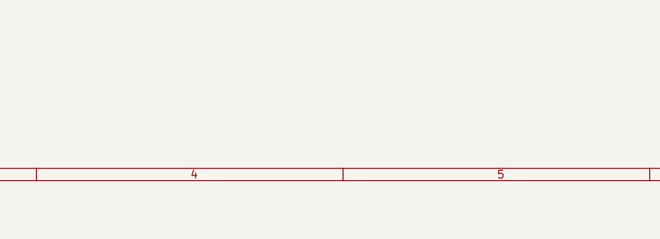

Power flags

Generated from blocks -> design.json by heypcb-kicad

HeyPCB method / pure KiCad

Sheet: /

File: esp32_drv5055a2.kicad_sch

Title: HeyPCB ESP32-S3 DRV5055A2 – TI DRV5055A2 ratiometric linear Hall

Size: A3	Date: 2026-10-18	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1