


M2 holes on the base plate bosses




Servo ports J10–J14, robot-left bank

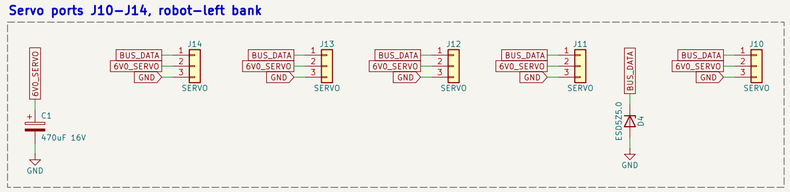


Servo ports J15–J19, robot-right bank

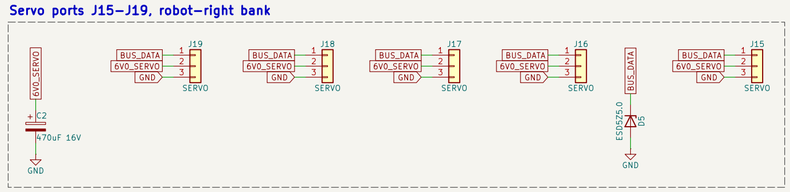


USB-C PD 9 V input: CH224K, TVS, 5 A fuse, 10 mOhm shunt

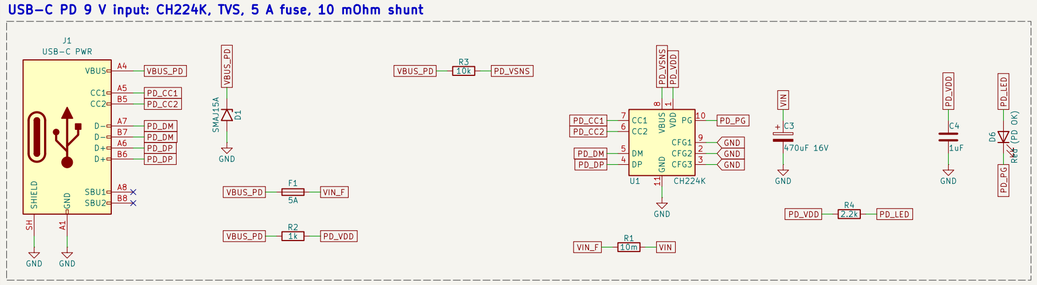


INA226 VIN monitor (0x40)

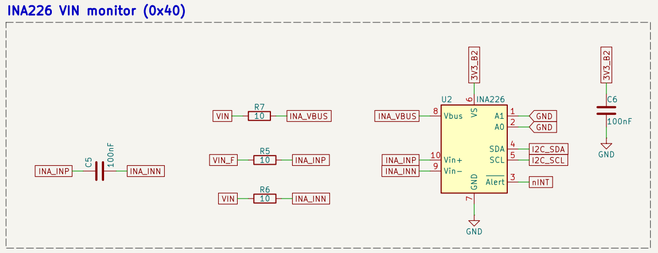


6V0_SERVO buck TPS565208 (SERVO_EN)

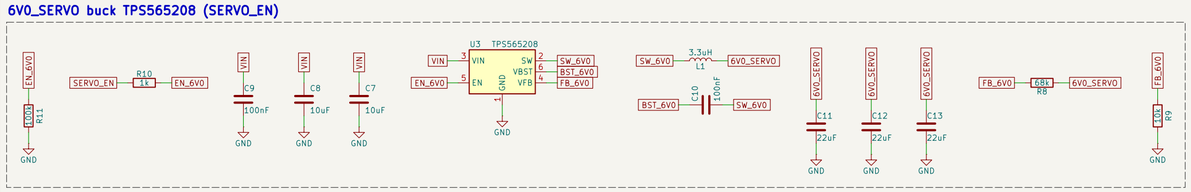


5V2 buck TPS56339

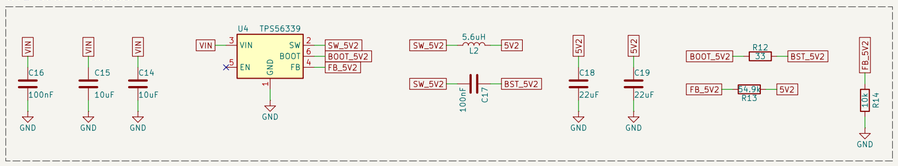


5V_SYS diode-OR and 3V3_B2 LDO

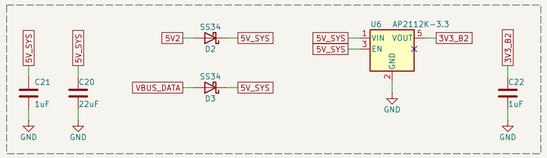


USB-C data port with USBLC6

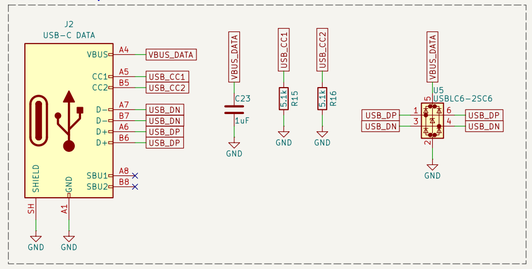


Half-duplex SCS bus driver

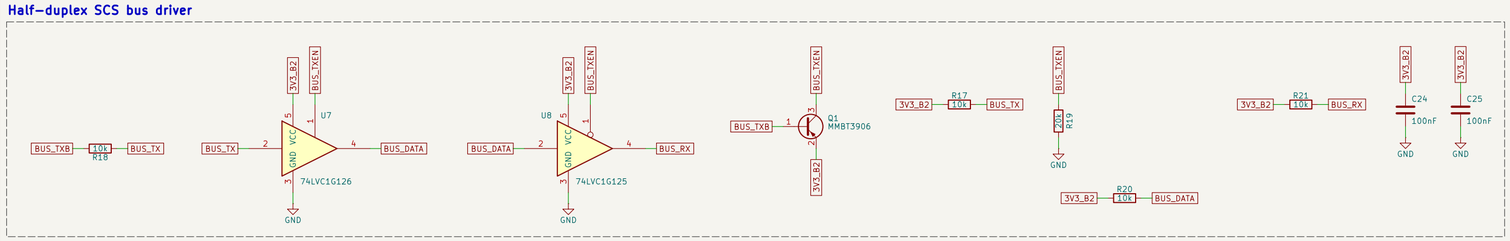

MAX98357A speaker amplifier

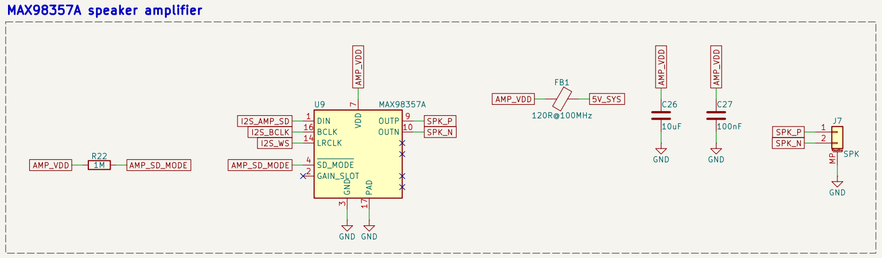

H1 (SH-10) and H2 (SH-7) to B1 Cortex



Test pads



Power flags



Generated from blocks -> design.json by heypcb-kicad

HeyPCB method / pure KiCad

Sheet: /

File: iris_brainstem.kicad_sch

Title: Iris Brainstem — power, USB and servo hub (B2) for the Iris robot hea

Size: A2	Date: 2026-10-03	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1