


BROW harness (J1, JST SH 8P) + 3V3 bulk




ToF distance (VL53L1X, I2C 0x29)

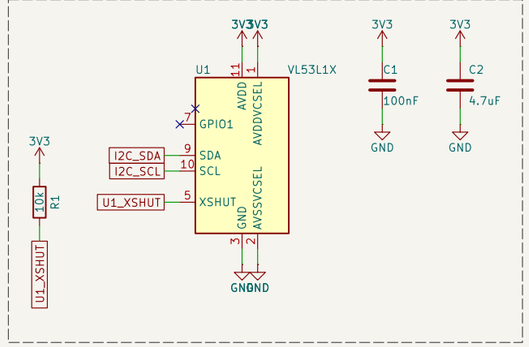


Ambient light (APDS-9306-065, I2C 0x52)

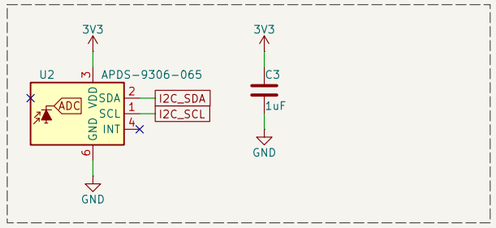


MIC L, robot left, Y +54 (ICS-43434, LR low: left slot)

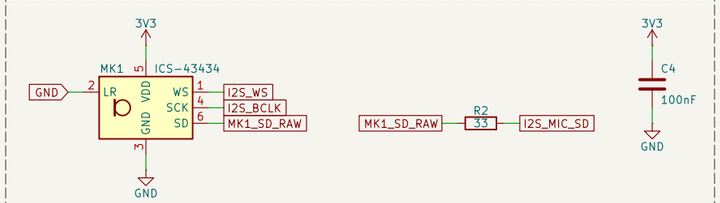


MIC R, robot right, Y −54 (ICS-43434, LR high: right slot)

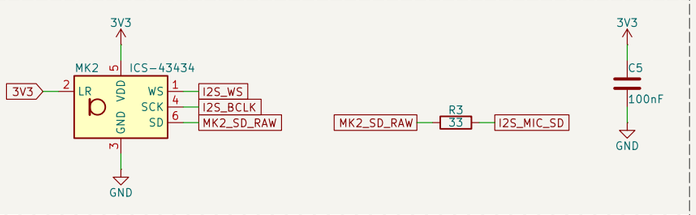

Touch electrode, two wings (TOUCH, ESP32-S3 TOUCH14)



Four M2 holes on the forehead-shell bosses



Power flags



Generated from blocks -> design.json by heypcb-kicad

HeyPCB method / pure KiCad

Sheet: /

File: iris_brow.kicad_sch

Title: Iris Brow — B4 forehead sensor strip for the Iris robot head: VL53L1X

Size: A3	Date: 2026-10-03	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1